



Shenzhen Belling Efficiency Testing Laboratory Co.,Ltd.
www.bellingtest.com

Tel:0755-29351191 Fax:0755-29351120

Address:1 F,No.1 building,Meibaoh industrial park,Dalang street,Longhua district,Shenzhen,China

LumCAT: LRG2-40K

Luminaire:

Report No:

Voltage(V): 120.03

Test No:

Current(A): 0.0418

LampCAT:

Power (W): 4.7450

Lamp flux(lm): 432.5

PF: 0.9458

Number of Lamps: 1

Ballast type:

Length(mm): 0

Width(mm): 0

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 432.49

Efficiency(%): 100.00%

Lumens(lm)/Power(W): 91.15

Central intensity(cd): 1498.847

Maximum intensity(cd): 1508.023

Angle of maximum intensity: C=225.0 γ =5.0

Beam Angle(50%Imax): [C0/180]Total=23.0

[C90/270]Total=23.5

Field angle(10%Imax): [C0/180]Total=52.6

[C90/270]Total=52.7

Maximum s/h(1/2): C0_180=0.48 C90_270=0.32

Maximum s/h(1/4): C0_180=0.69 C90_270=0.37

Up flux rate of lamp(%): 1.34%

Down flux rate of lamp(%): 98.66%

Up flux rate of LUM(%): 1.34%

Down flux rate of LUM(%): 98.66%

CIE Type : Direct lighting

Output flux ratio in π solid angle : 96.672%

Equipment: GMS-3000
Temperature(°C): 25

Date:
Humidity(%): 58%

Operator: Zac



$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	1498.847	.000	.000	.000%	.000%
5.0	1313.418	33.620	33.620	7.774%	7.774%
10.0	895.065	79.004	112.624	18.267%	26.041%
15.0	519.233	83.895	196.519	19.398%	45.439%
20.0	301.991	67.680	264.200	15.649%	61.088%
25.0	174.808	50.007	314.207	11.563%	72.651%
30.0	97.390	34.447	348.654	7.965%	80.616%
35.0	56.393	22.646	371.300	5.236%	85.852%
40.0	36.631	15.520	386.820	3.589%	89.440%
45.0	26.040	11.604	398.424	2.683%	92.124%
50.0	17.377	8.773	407.197	2.029%	94.152%
55.0	11.749	6.333	413.530	1.464%	95.616%
60.0	7.996	4.564	418.094	1.055%	96.672%
65.0	4.840	3.120	421.215	.722%	97.393%
70.0	3.051	1.998	423.213	.462%	97.855%
75.0	1.964	1.311	424.523	.303%	98.158%
80.0	1.578	.948	425.471	.219%	98.377%
85.0	1.087	.724	426.195	.167%	98.545%
90.0	.702	.490	426.685	.113%	98.658%
95.0	.807	.413	427.098	.095%	98.754%
100.0	.754	.424	427.522	.098%	98.852%
105.0	.824	.422	427.944	.098%	98.949%
110.0	.877	.445	428.389	.103%	99.052%
115.0	.842	.435	428.824	.101%	99.153%
120.0	.894	.422	429.246	.098%	99.250%
125.0	.894	.413	429.660	.096%	99.346%
130.0	.859	.381	430.041	.088%	99.434%
135.0	.947	.365	430.406	.084%	99.518%
140.0	.999	.360	430.766	.083%	99.602%
145.0	1.017	.336	431.103	.078%	99.679%
150.0	1.105	.312	431.415	.072%	99.752%
155.0	1.227	.295	431.710	.068%	99.820%
160.0	1.298	.265	431.975	.061%	99.881%
165.0	1.315	.215	432.190	.050%	99.931%
170.0	1.438	.163	432.354	.038%	99.969%
175.0	1.420	.102	432.456	.024%	99.992%
180.0	1.337	.033	432.489	.008%	100.000%

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-30	348.65	80.62%	80.62%
0-40	386.82	89.44%	89.44%
0-60	418.09	96.67%	96.67%
0-90	426.69	98.66%	98.66%
0-120	429.25	99.25%	99.25%
0-180	432.49	100.00%	100.00%
60-90	13.16	3.04%	3.04%
90-120	3.05	0.71%	0.71%
90-130	3.85	0.89%	0.89%
90-150	5.22	1.21%	1.21%
90-180	6.26	1.45%	1.45%
0-29.61	345.99	80.00%	80.00%

ZONAL LUMEN SUMMARY

0-10	112.62
10-20	151.58
20-30	84.45
30-40	38.17
40-50	20.38
50-60	10.90
60-70	5.12
70-80	2.26
80-90	1.21
90-100	0.84
100-110	0.87
110-120	0.86
120-130	0.79
130-140	0.73
140-150	0.65
150-160	0.56
160-170	0.38
170-180	0.10

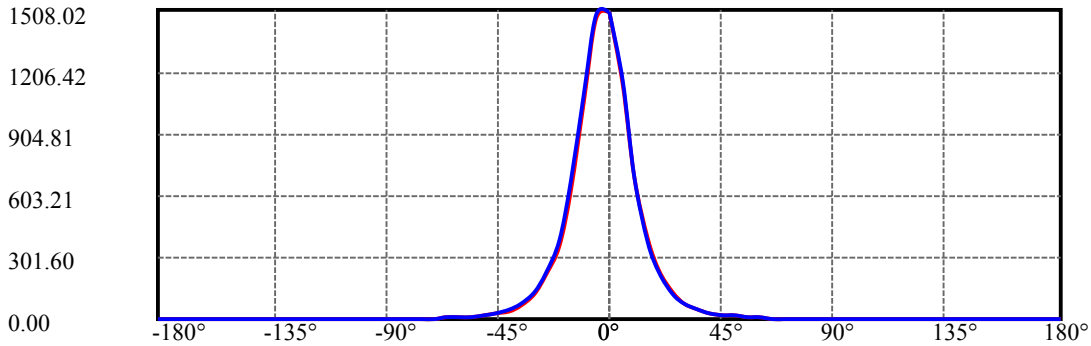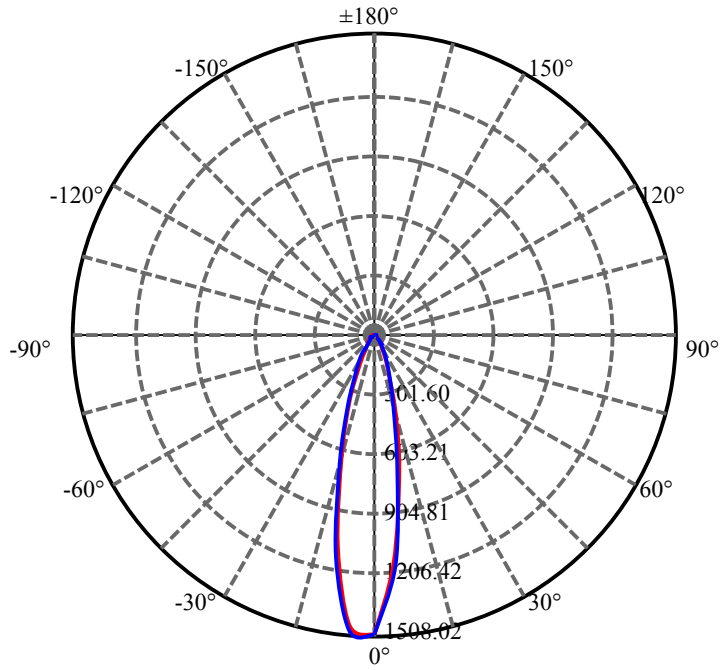

C0/C180: —


C90/C270: —

Field angle(10%Imax):C0/180Left:28.4 Right:24.3


:C90/270Left:28.9 Right:23.8

Beam Angle(50%Imax):C0/180Left:13.6 Right:9.4

:C90/270Left:14.1 Right:9.4

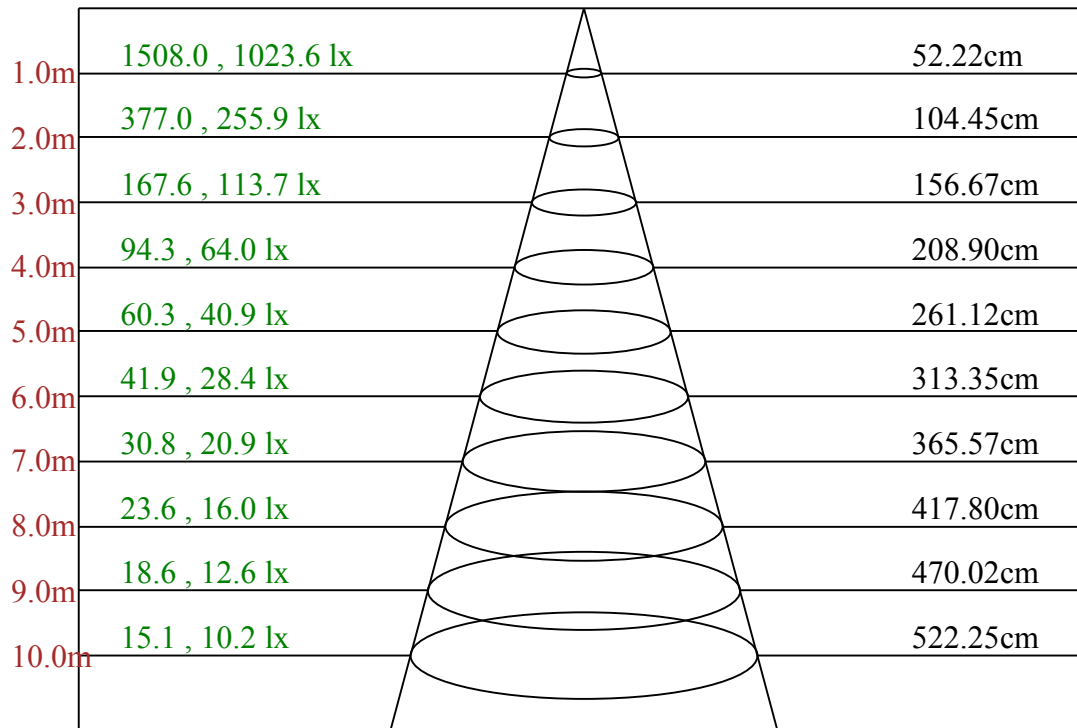

Max , Ave Beam angle of C225plane29.19

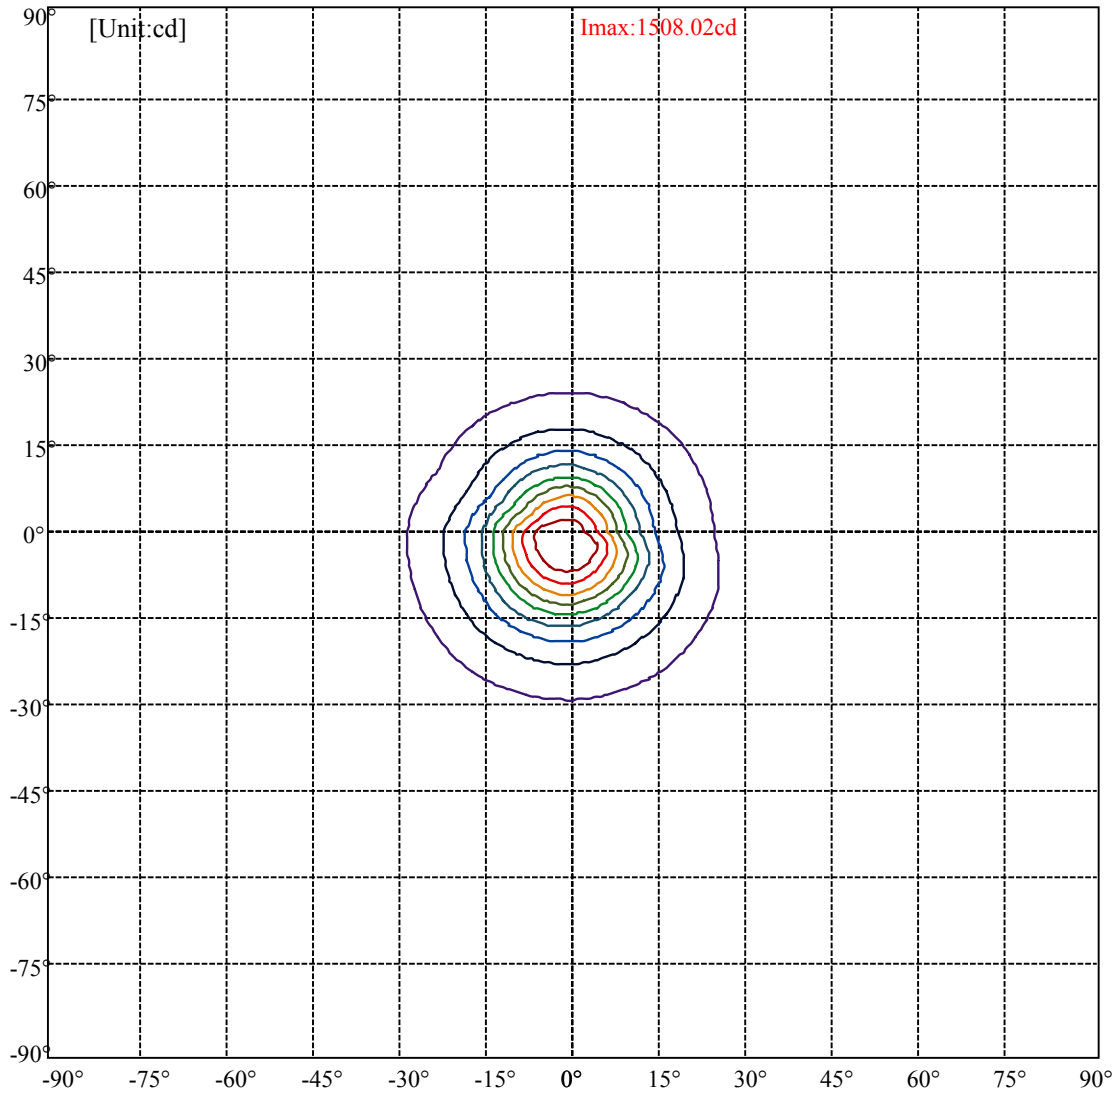

Intensity data(cd)

C/ γ (°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	1498.85	1143.85	694.11	396.15	236.80	135.23	74.63	44.89	30.86
22.5	1498.85	1130.11	669.70	374.27	226.41	129.90	72.67	43.77	29.74
45.0	1498.85	1116.36	659.32	367.82	219.96	124.57	69.86	42.65	29.18
67.5	1498.85	1128.70	656.24	366.42	217.72	125.13	68.74	42.93	29.18
90.0	1498.85	1158.72	688.50	377.64	226.13	125.97	70.42	42.65	29.46
112.5	1498.85	1179.77	719.92	403.17	234.55	133.27	73.51	43.21	30.02
135.0	1498.85	1234.19	776.04	429.54	248.30	143.93	78.84	44.89	31.42
157.5	1498.85	1293.11	839.16	461.53	264.57	154.31	85.57	48.54	32.83
180.0	1498.85	1458.36	1073.43	628.18	358.56	214.07	118.40	66.49	41.24
202.5	1498.85	1490.91	1127.02	666.90	386.34	225.29	124.57	69.86	43.21
225.0	1498.85	1508.02	1150.87	711.51	399.80	232.87	134.11	73.23	45.45
247.5	1498.85	1506.06	1154.80	708.98	402.33	230.90	131.86	74.35	46.29
270.0	1498.85	1482.77	1118.60	671.11	388.30	227.26	126.81	73.51	46.01
292.5	1498.85	1449.11	1064.74	621.73	364.45	212.67	118.68	69.58	42.93
315.0	1498.85	1390.75	1001.33	581.05	339.48	198.64	110.26	63.97	39.84
337.5	1498.85	1343.89	927.26	541.77	318.16	182.93	99.32	57.80	38.44
360.0	1498.85	1143.85	694.11	396.15	236.80	135.23	74.63	44.89	30.86
C/ γ (°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	22.45	15.71	10.94	7.01	4.21	2.53	1.68	1.40	0.84
22.5	21.88	16.27	11.22	7.30	4.77	2.53	1.68	1.68	0.84
45.0	21.04	15.43	11.22	7.58	4.77	3.09	1.96	1.40	0.84
67.5	21.88	15.99	11.50	7.86	4.77	3.09	1.96	1.68	0.84
90.0	22.16	15.99	10.94	7.86	4.49	3.09	1.96	1.40	0.84
112.5	21.88	15.71	10.66	7.30	4.77	2.81	1.96	1.40	0.84
135.0	22.73	15.71	10.38	7.30	4.21	2.53	1.68	1.40	0.84
157.5	24.13	15.15	10.38	7.01	4.21	2.81	1.96	1.40	0.56
180.0	28.90	19.08	12.06	8.42	5.05	3.37	1.96	1.40	1.12
202.5	30.02	17.96	12.06	8.42	5.05	3.09	1.96	1.68	1.40
225.0	30.86	18.52	12.35	8.42	4.77	3.37	1.96	1.96	1.40
247.5	31.98	19.36	12.63	8.42	5.05	3.37	1.96	1.68	1.12
270.0	31.42	19.36	12.63	8.70	5.33	3.09	1.96	1.40	1.40
292.5	30.02	19.08	12.91	8.70	5.05	3.65	1.96	1.68	1.40
315.0	28.34	19.36	12.91	8.70	5.33	3.09	2.25	1.68	1.68
337.5	26.93	19.36	13.19	8.98	5.61	3.37	2.53	1.96	1.40
360.0	22.45	15.71	10.94	7.01	4.21	2.53	1.68	1.40	0.84
C/ γ (°)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	0.56	0.00	0.00	0.56	0.56	0.56	0.84	0.00	0.28
22.5	0.56	0.84	0.56	0.56	0.56	0.84	0.56	0.84	0.56
45.0	0.56	0.84	0.56	0.84	0.84	0.84	0.84	0.84	0.84
67.5	0.56	0.56	0.84	0.56	0.56	0.84	0.28	0.56	0.84
90.0	0.56	0.84	0.56	0.56	0.84	0.56	0.56	0.84	0.56
112.5	0.00	0.56	0.56	0.28	0.84	0.28	1.12	0.56	0.84
135.0	0.56	0.84	0.56	0.56	0.84	0.84	0.84	1.12	1.12
157.5	0.56	0.56	0.56	0.56	0.56	0.28	0.56	0.84	0.84
180.0	0.84	0.84	0.84	1.12	1.12	0.84	0.84	1.12	1.12
202.5	0.84	1.12	1.12	1.12	0.84	1.12	1.40	1.12	0.84
225.0	0.84	0.84	0.56	1.12	1.12	0.84	1.40	1.12	1.12
247.5	1.40	0.84	1.12	1.12	1.12	1.12	1.12	1.12	0.56
270.0	0.84	1.12	1.12	1.12	0.84	1.12	0.84	1.12	0.84
292.5	0.84	1.12	0.84	1.12	1.12	1.12	0.84	0.84	1.40
315.0	0.84	1.12	0.84	1.12	1.12	1.12	1.12	1.12	1.12
337.5	0.84	0.84	1.40	0.84	1.12	1.12	1.12	1.12	0.84
360.0	0.56	0.00	0.00	0.56	0.56	0.56	0.84	0.00	0.28

Intensity data(cd)

Page: 8 Total:8

C/γ(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	0.56	0.28	0.56	0.56	0.84	0.84	1.12	1.40	1.12
22.5	0.56	1.12	0.84	1.12	1.12	1.40	1.12	1.68	1.40
45.0	0.84	1.12	0.84	1.12	1.12	1.40	1.40	1.40	1.68
67.5	0.56	1.12	1.12	1.12	1.40	1.40	1.40	1.40	1.40
90.0	1.12	1.12	1.12	1.40	1.12	1.12	1.40	1.40	1.68
112.5	0.84	0.56	0.84	0.84	1.40	1.12	1.40	1.68	1.12
135.0	0.84	1.12	0.84	1.12	1.12	1.12	1.12	1.40	1.40
157.5	0.84	0.84	0.84	1.12	1.12	1.12	1.12	1.40	1.12
180.0	1.12	1.12	1.12	1.12	1.40	1.40	1.12	1.12	1.40
202.5	1.12	1.12	1.12	1.12	1.12	1.40	1.12	1.68	1.40
225.0	1.12	1.12	1.12	1.12	1.40	1.68	1.68	1.12	1.40
247.5	1.40	1.12	1.12	1.12	1.40	1.40	1.40	1.12	1.40
270.0	0.84	1.12	1.40	1.12	1.40	1.40	1.68	1.68	1.40
292.5	1.12	1.12	1.12	1.12	1.12	1.12	1.40	1.40	1.68
315.0	1.12	1.12	1.40	1.40	1.40	1.68	1.40	1.68	1.40
337.5	1.12	0.84	0.84	1.12	1.12	1.12	1.12	1.40	1.68
360.0	0.56	0.28	0.56	0.56	0.84	0.84	1.12	1.40	1.12

C/γ(°) 180.0

0.0	1.34
22.5	1.34
45.0	1.34
67.5	1.34
90.0	1.34
112.5	1.34
135.0	1.34
157.5	1.34
180.0	1.34
202.5	1.34
225.0	1.34
247.5	1.34
270.0	1.34
292.5	1.34
315.0	1.34
337.5	1.34
360.0	1.34