
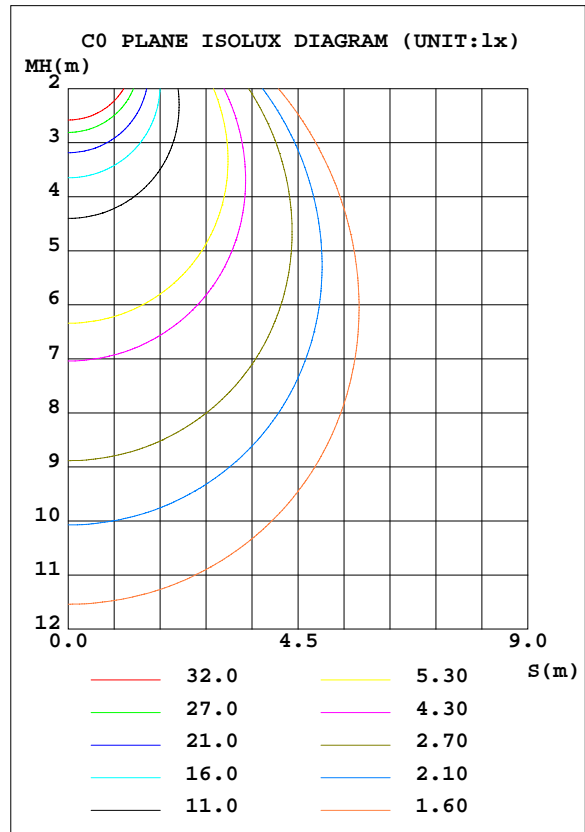


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 63.52 lm/W			
MODEL	LY4RCS 30K	I _{max} (cd)	213.3	S/MH(C0/180)	1.28
NOMINAL POWER(W)	0	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	600.66	η UP, DN(C0-180)	0.0,50.3
NOMINAL FLUX(lm)	600.656	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	100.0	CIBSE SHR MAX	1.35

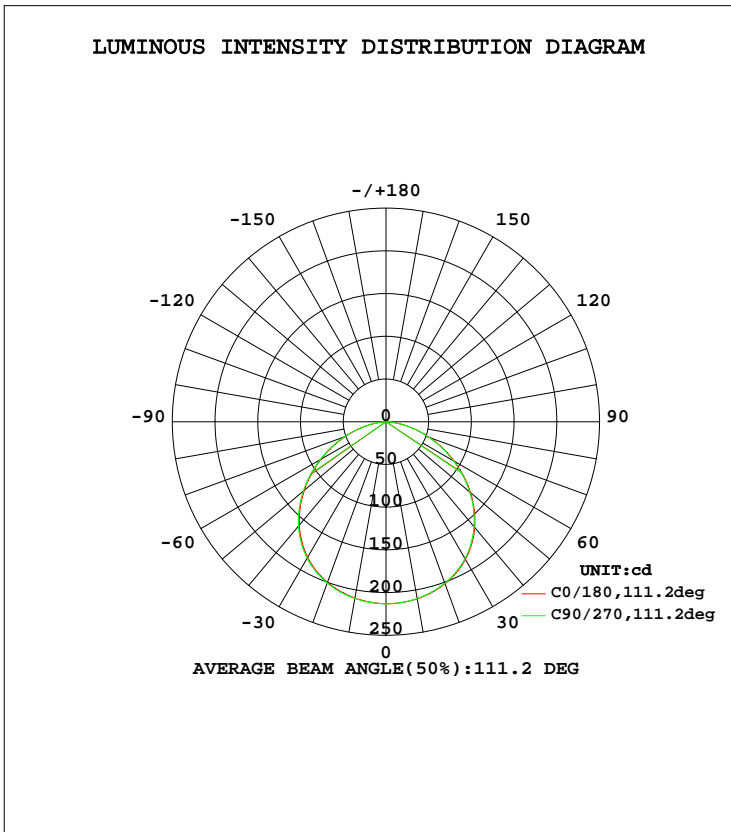


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.498m [K=1.0000]
 Remarks:

**ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES**

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	210.4	210.5	210.1	209.8	209.6	209.7	210.0	210.5	0- 10	20.20	20.20	3.36,3.36
20	201.8	201.9	201.2	200.3	200.2	200.3	201.0	201.9	10- 20	58.29	78.49	13.1,13.1
30	186.0	186.1	185.0	183.7	183.3	183.5	184.5	186.0	20- 30	89.38	167.9	27.9,27.9
40	161.5	161.6	160.3	158.5	157.9	157.9	159.3	161.2	30- 40	108.4	276.2	46,46
50	129.1	129.3	127.9	125.7	124.9	124.7	126.3	128.5	40- 50	111.1	387.4	64.5,64.5
60	92.14	92.47	91.04	88.80	87.87	87.68	89.11	91.30	50- 60	97.24	484.6	80.7,80.7
70	54.46	54.87	53.74	51.74	51.07	50.75	51.98	53.91	60- 70	70.56	555.2	92.4,92.4
80	20.23	20.61	19.86	18.47	17.71	17.40	18.15	19.50	70- 80	37.25	592.4	98.6,98.6
90	0.0345	0.0584	0.0233	0.0036	0	0	0	0	80- 90	8.207	600.6	100,100
100	0	0	0	0	0	0.0002	0	0	90-100	0.0008	600.6	100,100
110	0.0004	0	0	0	0.0012	0.0022	0.0006	0.0017	100-110	0.0005	600.6	100,100
120	0.0016	0	0	0	0.0027	0.0040	0.0017	0.0043	110-120	0.0016	600.6	100,100
130	0.0031	0.0003	0.0009	0.0065	0	0.0050	0.0018	0.0071	120-130	0.0028	600.6	100,100
140	0.0056	0.0010	0.0100	0.0121	0.0084	0.0058	0.0021	0.0110	130-140	0.0048	600.6	100,100
150	0.0099	0.0008	0.0118	0.0137	0.0131	0.0097	0.0071	0.0163	140-150	0.0056	600.6	100,100
160	0.0146	0.0016	0.0145	0.0150	0.0090	0.0153	0.0086	0.0217	150-160	0.0055	600.7	100,100
170	0.0202	0.0024	0.0147	0.0145	0.0054	0.0017	0	0.0263	160-170	0.0037	600.7	100,100
180	0	0	0	0	0	0	0	0	170-180	0.0007	600.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

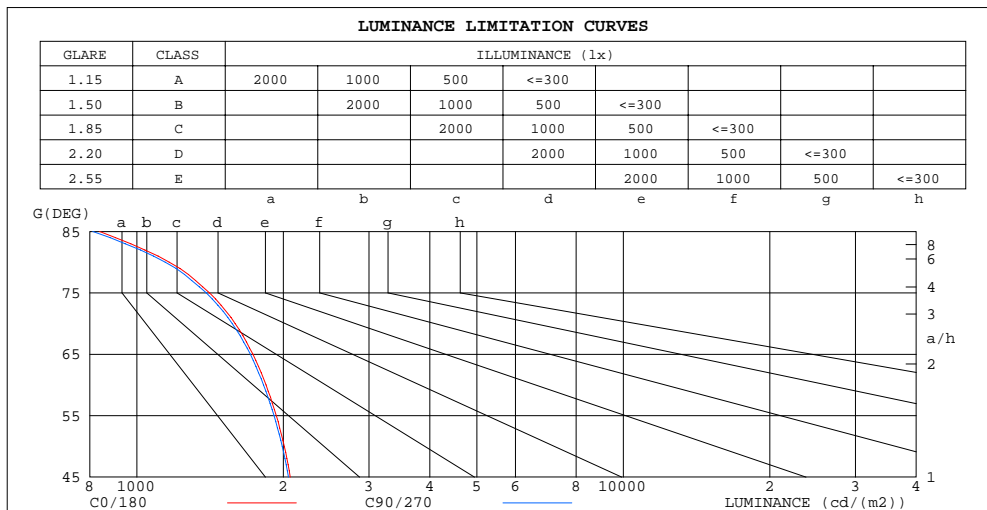


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.498m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	1.00	.97	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.87	.84
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.60
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.55	.65	.59	.54	.63	.57	.53	.51
5.0	.64	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.50	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.41	.34	.29	.40	.34	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25

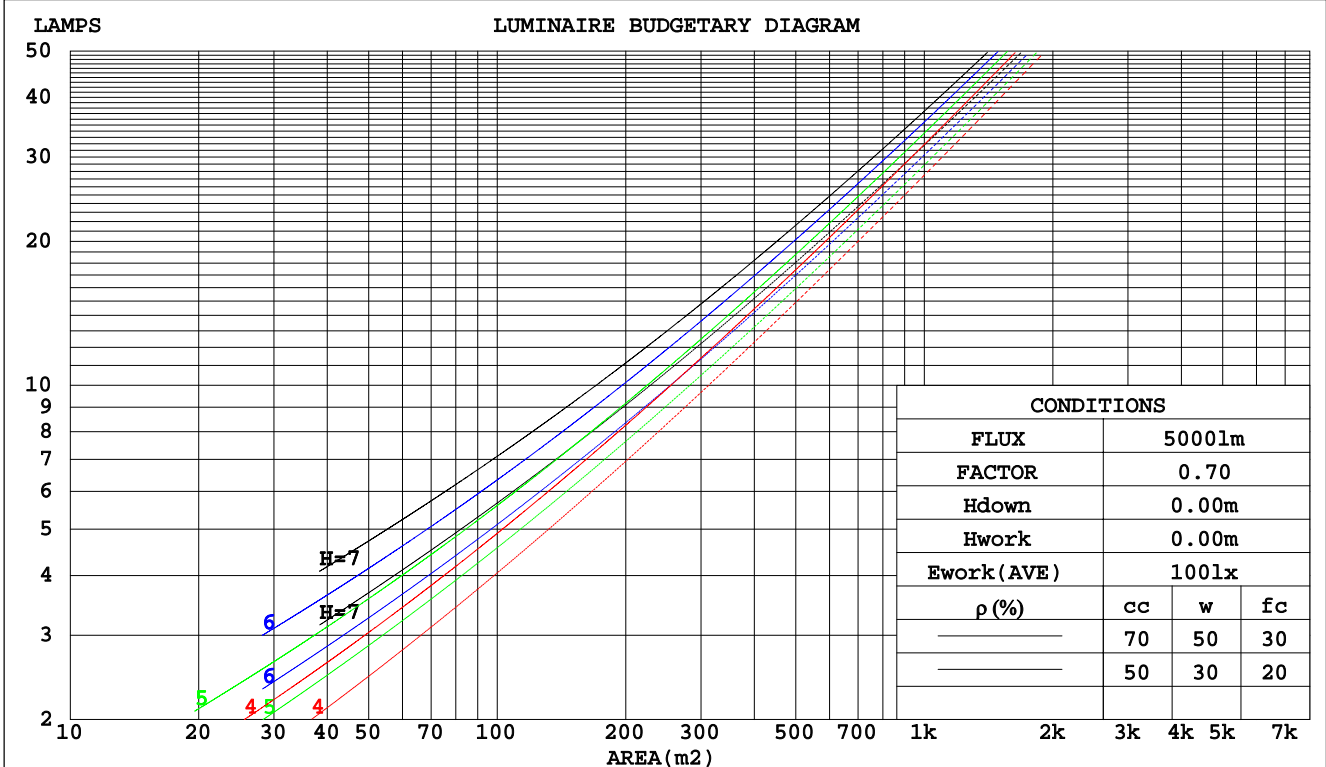

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.498m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.299	.170	.054	.292	.166	.053	.279	.160	.051	.266	.154	.049	.255	.148	.048	
2.0	.284	.156	.048	.278	.153	.047	.266	.148	.046	.256	.143	.045	.246	.139	.044	
3.0	.265	.141	.042	.259	.139	.042	.249	.135	.041	.239	.131	.040	.230	.128	.039	
4.0	.245	.127	.037	.240	.126	.037	.231	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.227	.116	.034	.223	.114	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032	
6.0	.211	.106	.030	.207	.105	.030	.200	.103	.030	.193	.101	.030	.187	.099	.029	
7.0	.197	.097	.028	.194	.096	.027	.187	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.151	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.163	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.141	.082	.040	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.498m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.2	16.7	15.5	16.9	17.1	15.2	16.7	15.4	16.9	17.1
3H	16.6	18.0	16.9	18.2	18.5	16.5	17.9	16.8	18.2	18.4
4H	17.1	18.4	17.4	18.7	18.9	17.0	18.4	17.4	18.6	18.9
6H	17.4	18.7	17.8	18.9	19.2	17.4	18.6	17.7	18.9	19.1
8H	17.5	18.7	17.8	19.0	19.3	17.4	18.6	17.8	18.9	19.2
12H	17.5	18.7	17.9	19.0	19.3	17.5	18.6	17.8	18.9	19.2
4H 2H	15.8	17.1	16.1	17.4	17.6	15.8	17.1	16.1	17.3	17.6
3H	17.3	18.5	17.7	18.8	19.1	17.3	18.5	17.7	18.7	19.0
4H	18.0	19.0	18.3	19.3	19.7	17.9	19.0	18.3	19.3	19.6
6H	18.4	19.3	18.8	19.7	20.0	18.3	19.3	18.7	19.6	20.0
8H	18.5	19.4	18.9	19.7	20.1	18.5	19.3	18.9	19.7	20.1
12H	18.6	19.4	19.0	19.8	20.2	18.5	19.3	18.9	19.7	20.1
8H 4H	18.2	19.1	18.6	19.4	19.8	18.1	19.0	18.6	19.4	19.8
6H	18.7	19.5	19.2	19.9	20.3	18.7	19.4	19.1	19.8	20.2
8H	18.9	19.6	19.4	20.0	20.4	18.9	19.5	19.3	19.9	20.4
12H	19.0	19.6	19.5	20.0	20.5	19.0	19.5	19.5	20.0	20.4
12H 4H	18.2	19.0	18.6	19.4	19.8	18.1	18.9	18.6	19.3	19.7
6H	18.8	19.4	19.2	19.8	20.3	18.7	19.4	19.2	19.8	20.2
8H	19.0	19.5	19.5	20.0	20.5	18.9	19.5	19.4	19.9	20.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 600.7 lm Total Lamp Luminous Flux. (8log(F/F0) = -1.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.498m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	57	46	40	56	46	40	33
0.80	68	57	50	67	56	49	66	56	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	74	67	83	73	66	80	72	65	58
1.50	89	79	72	87	78	72	84	77	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	100	92	86	98	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-03


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.498m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Conical surface Flux(90deg):
 332.55 lm
 %lum = 55.4%
 %lamp = 55.4%

Conical surface Flux(120deg):
 484.62 lm
 %lum = 80.7%
 %lamp = 80.7%

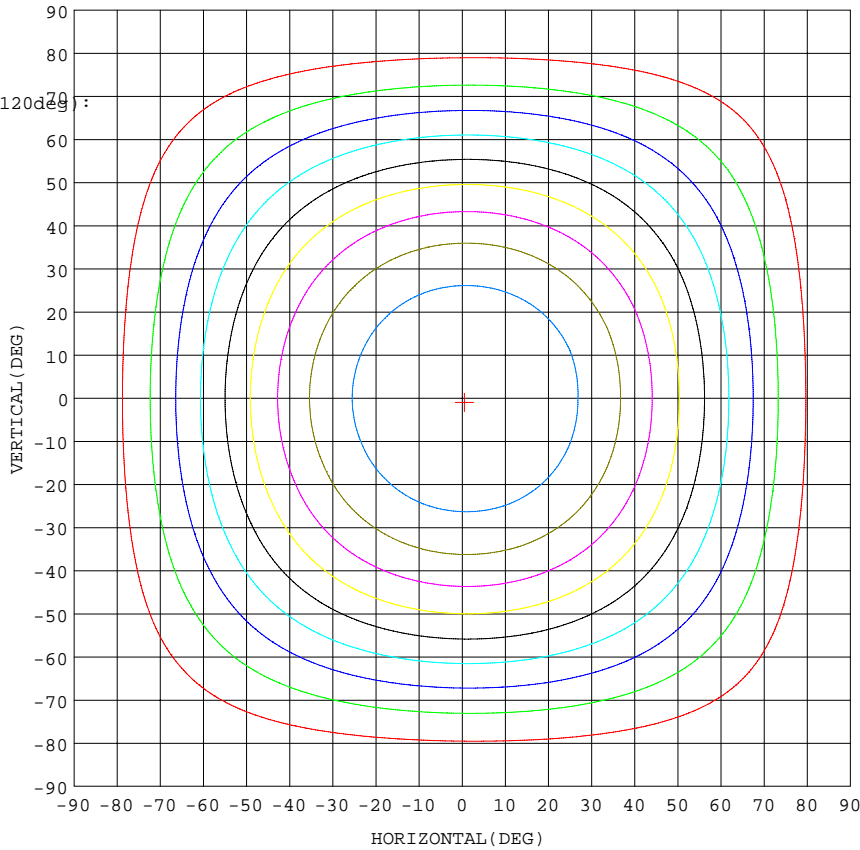


I_{max}: 213.2 (H0.5, V-1.0)
 (At: C=67.5, Gamma=0.0)
 UNIT: cd

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.498m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

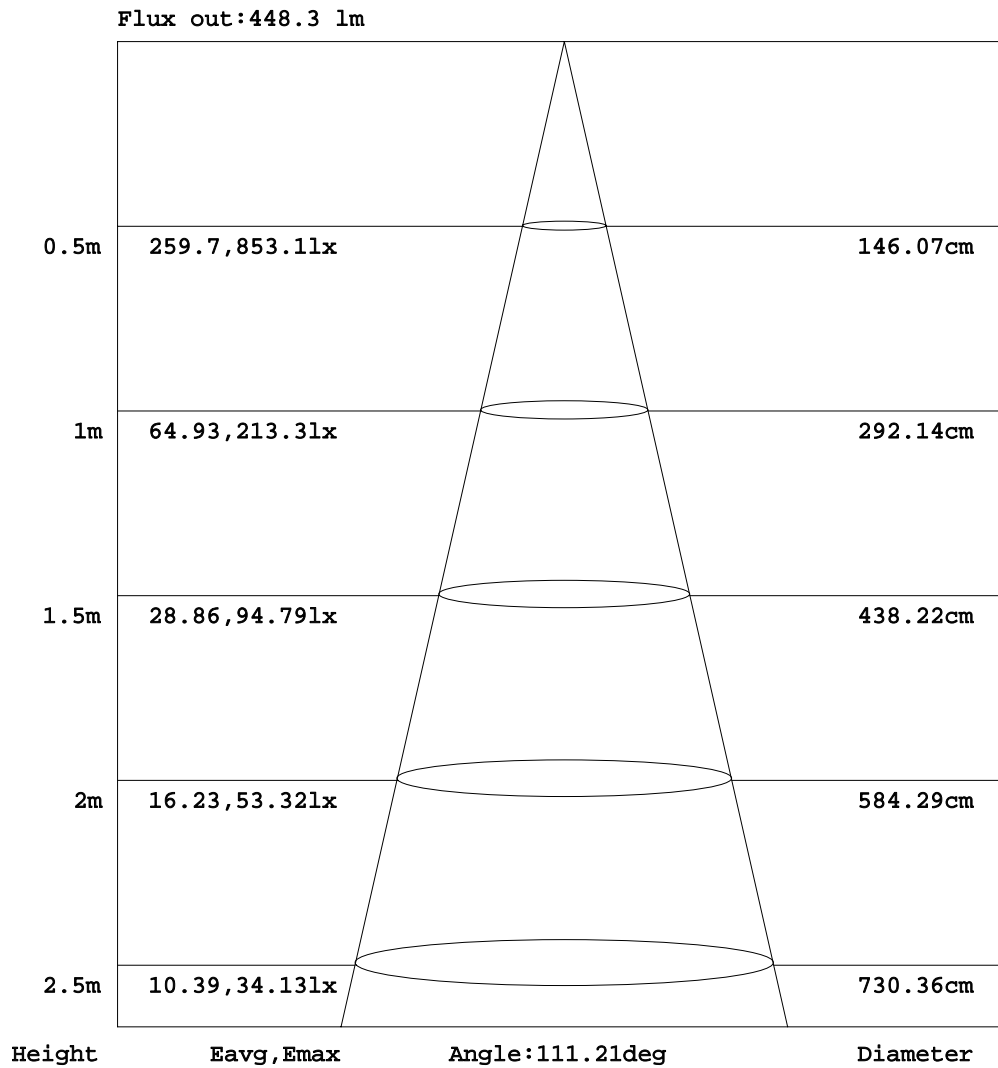


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.498m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

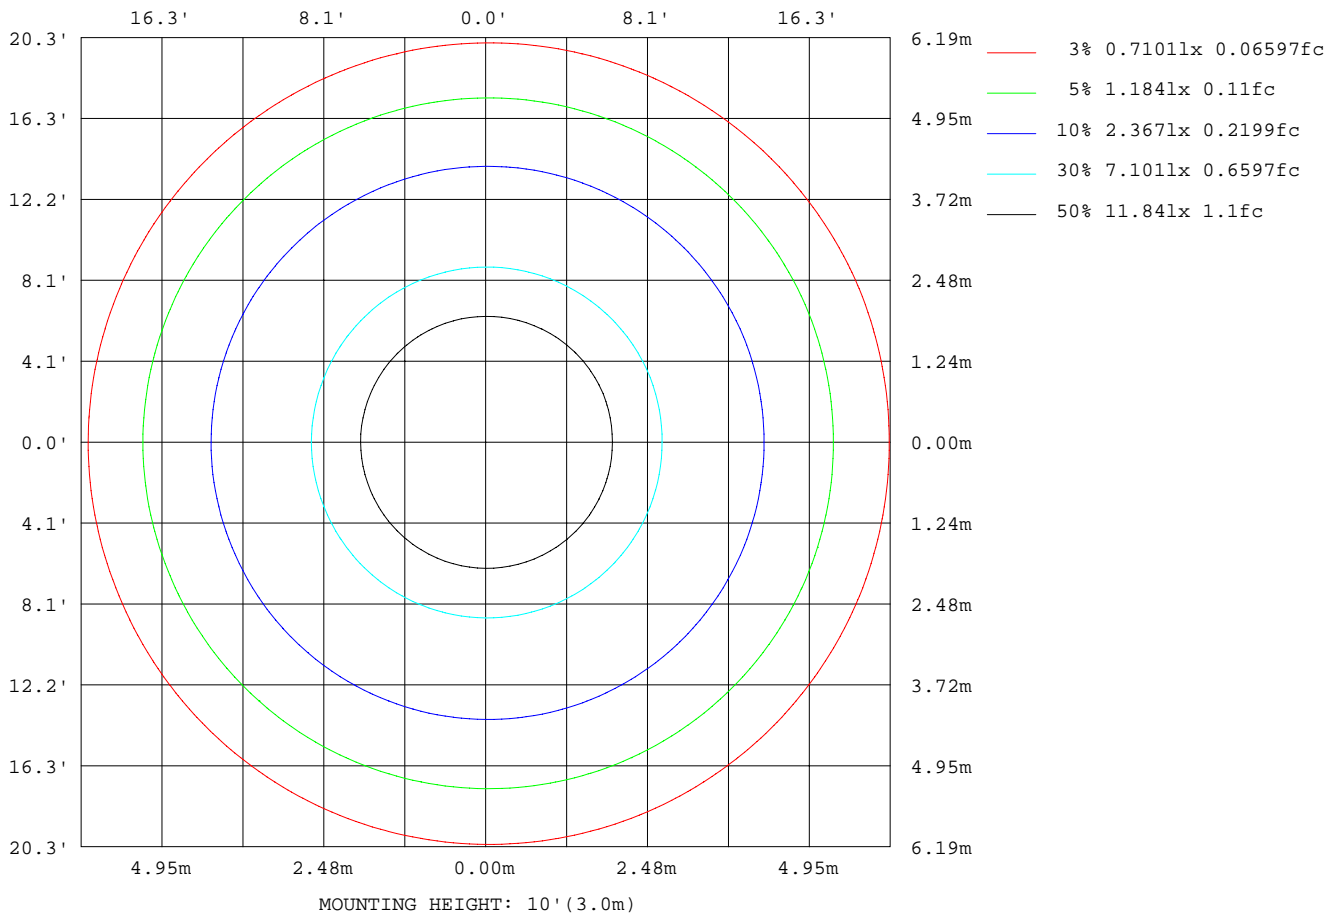

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.498m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	1685
L_0~180(75)av	1353
L_0~180(85)av	761
L_90~270(65)av	1687
L_90~270(75)av	1355
L_90~270(85)av	762
L_45(65)av	1686
L_45(75)av	1355
L_45(85)av	760

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.498m [K=1.0000]
 Remarks:

Planar Illuminance Curve

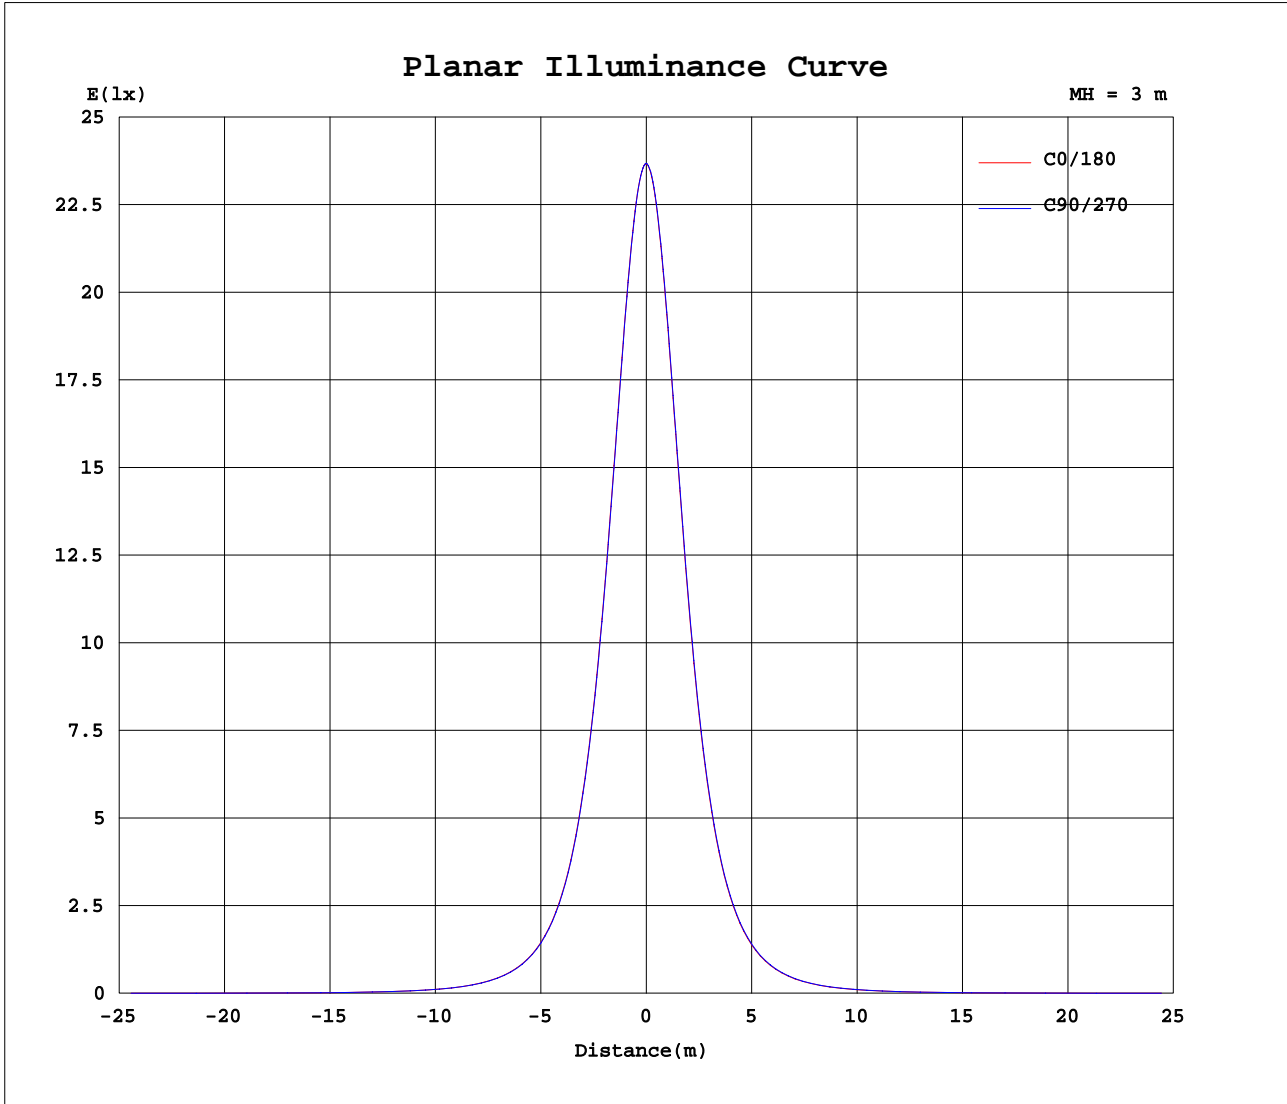

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: L/Y
Test Date: 2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 1.498m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0808A P:9.456W PF:0.9750 Lamp Flux:600.656x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	213	213	213	213	213	213	213	213	213	213	213	213	213	213	213	213			
5	212	212	213	213	212	212	212	212	212	212	212	212	212	212	213	213			
10	210	210	211	210	210	210	210	210	210	210	210	210	210	210	211	211			
15	207	207	207	207	206	206	206	206	206	206	206	206	206	207	207	207			
20	202	202	202	202	201	201	200	200	200	200	200	201	201	201	202	202			
25	195	195	195	195	194	194	193	193	193	193	193	193	193	194	194	195	196		
30	186	186	186	186	185	184	184	183	183	183	183	184	185	185	186	187			
35	175	175	175	175	174	173	172	171	172	172	172	172	173	174	175	175			
40	162	162	162	161	160	159	159	158	158	158	158	159	159	160	161	162			
45	146	146	146	146	145	144	143	142	142	142	142	143	144	145	146	147			
50	129	129	129	129	128	127	126	125	125	125	125	125	126	127	129	130			
55	111	111	111	111	110	109	108	107	107	106	106	107	108	109	110	111			
60	92.1	92.5	92.5	92.0	91.0	90.0	88.8	87.8	87.9	87.5	87.7	88.3	89.1	90.2	91.3	92.3			
65	73.2	73.6	73.6	73.1	72.3	71.2	70.1	69.2	69.2	68.8	69.0	69.5	70.3	71.3	72.4	73.3			
70	54.5	54.9	54.9	54.5	53.7	52.8	51.7	50.8	51.1	50.7	50.8	51.3	52.0	52.9	53.9	54.8			
75	36.5	36.9	36.9	36.6	35.9	35.1	34.2	33.4	33.5	33.2	33.2	33.6	34.2	35.0	35.9	36.7			
80	20.2	20.6	20.6	20.4	19.9	19.1	18.5	17.8	17.7	17.4	17.4	17.7	18.1	18.8	19.5	20.2			
85	7.31	7.49	7.53	7.38	7.07	6.66	6.22	5.81	5.96	5.78	5.69	5.91	6.20	6.61	7.05	7.43			
90	0.03	0.05	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.01			
135	0.00	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.00	0.01	0.00	0.01	0.01			
140	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01			
145	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01			
150	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02			
155	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02			
160	0.01	0.01	0.00	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.02	0.02			
165	0.02	0.02	0.00	0.01	0.02	0.02	0.01	0.02	0.00	0.00	0.02	0.02	0.00	0.01	0.02	0.02			
170	0.02	0.02	0.00	0.00	0.01	0.02	0.01	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.03	0.02			
175	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.498m [K=1.0000]
 Remarks: