



**Lotus
LED
Lights**

LIGHTING YOUR FUTURE



PRODUCT CATALOG

www.lotusledlights.com



TABLE OF CONTENTS

SEMI REGRESSED	3
DEEP REGRESSED	7
ADJUSTABLE GIMBAL	9
SLOPED & CORROSION RESISTANT	13
LED PANELS	15
COMMERCIAL RECESSED	19
PUCKS	21
STEP LIGHTS	22
SURFACE / J-BOX MOUNT	23
LED BARS	25
LED STRIPS	27
DC OUTPUT DRIVERS	29
DIMMERS & SWITCHES	33
3 IN 1 / DOOR BELL	34



**PRODUCT
CATALOG**


VERSION 0622 V2



SEMI REGRESSED 2"



- Model #: LED-1-S7W-5CCT
- Size: 2"
- Trims: White & Black, Round & Square



- Model #: LED-1-S6W
- Size: 2"
- Trims: White & Black, Round & Square




- Model #: LED-2-S8W2
- Size: 2"
- Trims: 85 Combinations In Stock

Model:	LED-1-S6W	LED-1-S7W-5CCT	LED-2-S8W2
Short Description:	2" Round / Square 24 V AC/DC	2" Round / Square 7W 5CCT	2" Round / Square Designer Series
Power (W):	6 W	7 W	8 W
Warm 2700 K (lm):		430	580
Soft 3000 K (lm):	480	460	600
Bright 3500 K (lm):		480	
Neutral 4000 K (lm):		480	620
Daylight 5000 K (lm):		450	
Dim to Warm DTW (K):			
User Selectable CC (K):		5 CCT	
Input Voltage:	24 V AC / DC	120 V AC	
Dimmable Triac:	Yes		
Dimmable 0-10V:	No		
Color Rendering Index CRI:	90+		
Beam Angle:	38°		38° / 24
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Year		5 Year
Certifications:	ETL		ETL ES
Fixture IP Grade:	Damp		
Cut Out:	2"	2 1/8"	2 3/4"
Dimensions (Outside):	2 1/4"	2 3/8"	3 1/8"

- Model #: LED-2-S15W
- Size: 2"
- Trims: 85 Combinations In Stock



- Model #: LED-2-S15W-L5CCTWH-T
- Size: 2"
- Trims: White

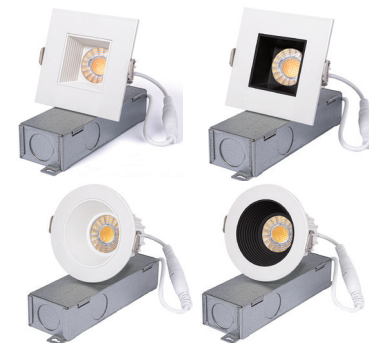

- Model #: JXL-COB02
- Size: 2"
- Trims: White & Black, Smooth & Baffle

Model:	LED-2-S15W	LED-2-S15W-L5CCTWH-T	JXL-COB02
Short Description:	2" Round / Square Designer Series HO 27/30/40 K	2" Trimless Round HO Designer Series 5CCT	2" Round / Square Economy 3CCT
Power (W):	15 W	15 W	8 W
Warm 2700 K (lm):	980 / 820	820	
Soft 3000 K (lm):	1000 / 880	870	620 / 520
Bright 3500 K (lm):	N/A / 960	950	
Neutral 4000 K (lm):	1020 / 1000	985	670 / 570
Daylight 5000 K (lm):	N/A / 960	960	650 / 550
Dim to Warm DTW (K):	3000K to 1800K - Stock Sept 2022		
User Selectable CC (K):	5 CCT		
Input Voltage:	120V AC Triac Dim / 120-277V AC 0-10V Dim		120 V AC
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		No
Color Rendering Index CRI:	90+		
Beam Angle:	38° / 24°		36°
Rated Life (LM70 Hours):	50,000		30,000
Warranty (Years):	5 Year		3 Year
Certifications:	ETL ES		
Fixture IP Grade:	Wet		Damp
Cut Out:	2 3/4"	2 5/8"	2 3/4"
Dimensions (Outside):	3 1/8"	Trimless 2 5/8"	3 1/8"



SEMI - REGRESSED 4" TO 6"



- Model #: AD-LED-4-S15W
- Size: 4"
- Trims: Round & Square, White & Black



- Model #: JXL-COB04
- Size: 4"
- Trims: White & Black, Smooth & Baffle



- Model #: LL4RR
- Size: 4"
- Trims: White & Black



- Model #: LL4SR
- Size: 4"
- Trims: White & Black



- Model #: LL6RR
- Size: 6"
- Trims: White & Black



- Model #: LL6SR
- Size: 6"
- Trims: White & Black

Model:	AD-LED-4-S15W	LL4RR	LL4SR
Short Description:	4" Round / Square Regressed 3K, 4K, 5CCT	4" Round Regressed Plenum	4" Square Regressed Plenum
Power (W):	15 W	14.5 W	14.5 W
Warm 2700 K (lm):	910	950	950
Soft 3000 K (lm):	960	1000	1000
Bright 3500 K (lm):	1015		
Neutral 4000 K (lm):	1050	1020	1020
Daylight 5000 K (lm):	1055		
Dim to Warm DTW (K):			
User Selectable CC (K):	5 CCT		
Input Voltage:	120 V AC	120-347 V	120-347 V
Dimmable Triac:		Yes	
Dimmable 0-10V:		Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	40°	90°	90°
Rated Life (LM70 Hours):	50,000	50,000	50,000
Warranty (Years):	5 Year	10 Res. 5 Com.	10 Res. 5 Com.
Certifications:	ETL ES	UL ES T24	UL ES T24
Fixture IP Grade:	Damp	Wet IP54	Wet IP54
Cut Out:	3 3/4"	4 1/4"	
Dimensions (Outside):	4 1/2"	5"	

Model:	JXL-COB04	LL6RR	LL6SR
Short Description:	4" Round / Square Economy 3CCT	6" Round Regressed Plenum	6" Square Regressed Plenum
Power (W):	15 W	18 W	
Warm 2700 K (lm):		1150	
Soft 3000 K (lm):	1230/1170	1200	
Bright 3500 K (lm):			
Neutral 4000 K (lm):	1410/1360	1300	
Daylight 5000 K (lm):	1390/1290		
Dim to Warm DTW (K):			
User Selectable CC (K):	3 CCT 30-40-50		
Input Voltage:	120 V AC	120-347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:	No	Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	36°	90°	
Rated Life (LM70 Hours):	30,000	50,000	
Warranty (Years):	3 Year	10 Res. 5 Com.	
Certifications:	ETL ES	UL ES T24	
Fixture IP Grade:	Damp	Wet IP54	
Cut Out:	4 1/2"	6 1/4"	
Dimensions (Outside):	4 3/4"	7"	



DEEP REGRESSED




- Model #: LD4R-IT
- Size: 4"
- Trimless: White, Black & Silver



- Model #: LD4R
- Size: 4"
- Trims: As Shown




- Model #: LD4S
- Size: 4"
- Trims: As Shown



Model:	LD4R	LD4R-IT	LD4S
Short Description:	4" Round Deep Regressed	4" Round Trimless Deep Regressed	4" Square Deep Regressed
Power (W):	15 / 18 W		
Warm 2700 K (lm):	1100 / 1500		
Soft 3000 K (lm):	1200 / 1550		
Bright 3500 K (lm):	1250 / 1600		
Neutral 4000 K (lm):	1300 / 1650		
Daylight 5000 K (lm):	1400 / 1700		
Dim to Warm DTW (K):	900 / 1150		
User Selectable CC (K):	5 CCT 2700-3000-3500-4000-5000		
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	90+		
Beam Angle:	30°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Year Res / 5 Com		
Certifications:	UL ES T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	4 1/2"	4 1/2"	4 1/2"
Dimensions (Outside):	4 7/8"	Trimless 4 1/2"	4 7/8"



- Model #: LD6R
- Size: 6"
- Trims: As Shown



- Model #: LD8R
- Size: 8"
- Trims: As Shown



Model:	LD6R	LD8R
Short Description:	6" Round Deep Regressed	8" Round Deep Regressed
Power (W):	18 / 30 W	
Warm 2700 K (lm):	1500 / 2630	
Soft 3000 K (lm):	1550 / 2700	
Bright 3500 K (lm):	1600 / 2810	
Neutral 4000 K (lm):	1650 / 2900	
Daylight 5000 K (lm):	1700 / 3000	
Dim to Warm DTW (K):	1150 - 18W only	
User Selectable CC (K):	5 CCT - 18W only	
Input Voltage:	120 V - 347 V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Year Res / 5 Com	
Certifications:	UL ES T24	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	6 1/4"	8
Dimensions (Outside):	6 3/4"	9"





ADJUSTABLE GIMBAL 2" TO 3.5"



- Model #: LRG2-HO
- Size: 2"
- Trims: Black & White



- Model #: LL2G-HO
- Size: 2"
- Trims: Black, White, Nickel



- Model #: LSG2-HO
- Size: 2"
- Trims: Black & White

Model:	LL2G-HO	LRG2-HO	LSG2-HO
Short Description:	2" Round Eyeball Gimbal	2" Round Regressed Gimbal	2" Square Regressed Gimbal
Power (W):	5.5 W		
Warm 2700 K (lm):	450		
Soft 3000 K (lm):	490		
Bright 3500 K (lm):	500		
Neutral 4000 K (lm):	530		
Daylight 5000 K (lm):	550		
Dim to Warm DTW (K):			
User Selectable CC (K):			
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	90+		
Beam Angle:	36°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Year Residential / 5 Year Commercial		
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	2 1/8"	2 3/4"	
Dimensions (Outside):	2 1/2"	3"	



- Model #: LRG3
- Size: 3"
- Trims: Black & White



- Model #: LL3G
- Size: 3"
- Trims: Trims: Black, White, Nickel



- Model #: LSG3
- Size: 3"
- Trims: Black & White



- Model #: AD-35-S12W-xx-WH-REY
- Size: 3.5"
- Trims: As Shown

Model:	LRG3	LSG3	LL3G	AD-35-S12W-xx-WH-
Short Description:	3" Round Regressed Gimbal	3" Square Regressed Gimbal	3" Round Eyeball Gimbal	3.5" Round Venus Gimbal 5CCT or DTW
Power (W):	7.5 W			12 W
Warm 2700 K (lm):	580			780
Soft 3000 K (lm):	600			820
Bright 3500 K (lm):	620			890
Neutral 4000 K (lm):	630			920
Daylight 5000 K (lm):	650			910
Dim to Warm DTW (K):	3000K to 2000K			3000K to 1800K
User Selectable CC (K):	5 CCT 2700-3000-3500-4000-5000			
Input Voltage:	120 V - 347 V AC		120 V - 347 V AC	120 V AC
Dimmable Triac:	Yes			
Dimmable 0-10V:	Yes			No
Color Rendering Index CRI:	90+			
Beam Angle:	38°/15°		38°	
Rated Life (LM70 Hours):	50,000			30,000
Warranty (Years):	10 Y Res. / 5 Y Com.			5 Year
Certifications:	UL ES (Ex. Dim - Warm & 5CCT) T24			ETL ES
Fixture IP Grade:	Wet Location IP54			
Cut Out:	3 1/2"		3"	3 3/4"
Dimensions (Outside):	4 1/4"		3 1/4"	4 3/8"

ADJUSTABLE GIMBAL 4" TO 6"



Model #: LRG4
Size: 4"
Trims: Black, White



Model #: LLG4
Size: 4"
Trims: Black, White, Nickel



Model #: AD-LED-4-S12W-xx-LREY
Size: 4"
Trims: White & Black, Round & Square



Model #: LED-4-S9W-xx-FG
Size: 4"
Trims: White & Black



Model #: LRG6
Size: 6"
Trims: White & Black




Model #: LED-6-S15W-xx-FG
Size: 6"
Trims: White & Black

Model:	LRG4	LLG4	AD-LED-4-S12W-xx-LREY
Short Description:	4" Round Regressed Gimbal	4" Round Eyeball Gimbal	4" Round / Square Venus Gimbal 3K, DTW, 5CCT
Power (W):	11.4 / 15 W		12 W
Warm 2700 K (lm):	960 / 1100		780
Soft 3000 K (lm):	1000 / 1200		880 / 820
Bright 3500 K (lm):	1020 / 1250		890
Neutral 4000 K (lm):	1050 / 1300		920
Daylight 5000 K (lm):	1100 / 1400		910
Dim to Warm DTW (K):	800 / 900		3000K to 1800K
User Selectable CC (K):	5 CCT 2700 - 3000 - 3500 - 4000 - 5000		
Input Voltage:	120 V - 347 V AC		120 V AC
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		No
Color Rendering Index CRI:	90+		
Beam Angle:	38°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Y Res. / 5 Y Com.		5 Year
Certifications:	UL ES T24 (except DTW & 5CCT)		ETL ES
Fixture IP Grade:	Wet Location IP54		
Cut Out:	5"	4 1/2"	
Dimensions (Outside):	5 3/4"	5"	

Model:	LED-4-S9W-xx-FG	LRG6	LED-6-S15W-5CCT-xx-FG
Short Description:	4" Round Floating Gimbal 3K or 5CCT	6" Round Regressed Gimbal	6" Round Floating Gimbal 3K or 5CCT
Power (W):	9 W	15 / 18 W	15 W
Warm 2700 K (lm):	740	1100 / 1500	1180
Soft 3000 K (lm):	790 / 770	1200 / 1550	1520 / 1220
Bright 3500 K (lm):	820	1250 / 1600	1270
Neutral 4000 K (lm):	850	1300 / 1650	1270
Daylight 5000 K (lm):	855	1400 / 1700	1180
Dim to Warm DTW (K):	3000K-1800K Stock Sept	900 / 1150	
User Selectable CC (K):	5 CCT 2700 - 3000 - 3500 - 4000 - 5000		
Input Voltage:	120 V AC	120 V - 347 V AC	120V-277 V AC
Dimmable Triac:	Yes		
Dimmable 0-10V:	No	Yes	
Color Rendering Index CRI:	90+		
Beam Angle:	38°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Year	10 Res. 5 Com.	3 Year
Certifications:	ETL ES	UL ES T24	ETL ES
Fixture IP Grade:	Damp	Wet IP54	Damp
Cut Out:	4 1/2"	6"	
Dimensions (Outside):	4 7/8"	7 1/2"	6 7/8"

SLOPED & CORROSION RESISTANT

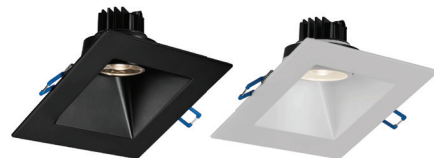

Model #: LSG3-5SSL
 Size: 5"
 Trims: Black & White



Model #: LD4R-CPL
 Size: 4"
 Trims: White



Model #: LRG3-4RSL
 Size: 4"
 Trims: Black & White



Model #: LD4R-5R-SL30
 Size: 5"
 Trims: Black & White



Model #: LRG6-6RSL
 Size: 6"
 Trims: Black & White

Model:	LRG3-4RSL	LSG3-5SSL
Short Description:	4" Round Sloped 30° Gimbal for 5° to 55° Slopes	5" Square Sloped 30° Gimbal for 5° to 55° Slopes
Power (W):	7.5 W	
Warm 2700 K (lm):	580	
Soft 3000 K (lm):	600	
Bright 3500 K (lm):	620	
Neutral 4000 K (lm):	630	
Daylight 5000 K (lm):	650	
Dim to Warm DTW (K):	3000K to 2000K	
User Selectable CC (K):	5 CCT 2700-3000-3500-4000-5000	
Input Voltage:	120 V - 347 V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Y Res. / 5 Y Com.	
Certifications:	UL ES (Ex. Dim - Warm & 5CCT) T24	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	5"	
Dimensions (Outside):	5 3/4"	

Model:	LD4R-CPL	LD4R-5R-SL30	LRG6-6RSL
Short Description:	4" Round Polycarbonate Regressed	5" Round 30° Sloped Deep Regressed	6" Round 30° Sloped Gimbal for 10° to 50° Slopes
Power (W):	15 / 18 W		
Warm 2700 K (lm):	1100 / 1500		
Soft 3000 K (lm):	1200 / 1550		
Bright 3500 K (lm):	1250 / 1600		
Neutral 4000 K (lm):	1300 / 1650		
Daylight 5000 K (lm):	1400 / 1700		
Dim to Warm DTW (K):	3000K to 2000K		
User Selectable CC (K):	5 CCT 2700-3000-3500-4000-5000		
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	90+		
Beam Angle:	30°		38°
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Y Res. / 5 Y Com.		
Certifications:	UL ES T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	4 1/2"	5 1/2"	6"
Dimensions (Outside):	4 7/16"	6 1/4"	7 1/2"



LED PANELS 4"



- Model #: LL4R
- Size: 4"
- Trims: White, Black, Copper & Nickel



- Model #: LED-S9W-5CCTWH-R-BF
- Size: 4"
- Trims: White



- Model #: LB4R
- Size: 4"
- Trims: White & Black



- Model #: LL4S
- Size: 4"
- Trims: White, Black



- Model #: LED-S9W
- Size: 4"
- Trims: White



- Model #: LED-S9W-5CCTWH-SQ
- Size: 4"
- Trims: White

Model:	LB4R	LL4R	LL4S
Short Description:	4" Round Super Thin Economy	4" Round Super Thin Ultimate	4" Square Super Thin Ultimate
Power (W):	11 W	13.5 W	13.5 W
Warm 2700 K (lm):		750	2700K - 800
Soft 3000 K (lm):	700	760	3000K - 850
Bright 3500 K (lm):			
Neutral 4000 K (lm):	730	800	4000K - 950
Daylight 5000 K (lm):		850	
Dim to Warm DTW (K):	30K-20K	28-20K 35-20K	
User Selectable CC (K):			
Input Voltage:	120V - 347V AC or 24V DC		120V - 347V A
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	80	90	80
Beam Angle:	110°		
Rated Life (LM70 Hours):	36,000	50,000	
Warranty (Years):	5 Year	10 Res. 5 Com.	
Certifications:	UL ES		
Fixture IP Grade:	Wet IP54		
Cut Out:	4 1/4"		
Dimensions (Outside):	4 7/8"	5 1/4"	4 3/4"

Model:	LED-S9W-5CCTWH-R-BF	LED-S9W	LED-S9W-5CCTWH-SQ
Short Description:	4" Round Regressed Baffle 5CCT	4" Round Budget 3K, 4K or 5CCT	4" Square Budget 5CCT
Power (W):	9 W		
Warm 2700 K (lm):	685	600	650
Soft 3000 K (lm):	720	600	700
Bright 3500 K (lm):	770	620	735
Neutral 4000 K (lm):	780	620	740
Daylight 5000 K (lm):	760	620	710
Dim to Warm DTW (K):			
User Selectable CC (K):	5 CCT		
Input Voltage:	120 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	No		
Color Rendering Index CRI:	80		
Beam Angle:	110°		
Rated Life (LM70 Hours):	36,000		
Warranty (Years):	3 Year		
Certifications:	ETL ES		
Fixture IP Grade:	Damp		
Cut Out:	4 1/4"		
Dimensions (Outside):	5"		



LED PANELS 6"



- Model #: LL6R
- Size: 6"
- Trims: White, Black, Copper & Nickel



- Model #: LED-6-S12W-5CCTWH-R-BF
- Size: 6"
- Trims: As Shown



- Model #: LB6R
- Size: 6"
- Trims: White & Black



- Model #: LL6S
- Size: 6"
- Trims: White & Black



- Model #: LED-6-S12W
- Size: 6"
- Trims: White



- Model #: LED-6-S12W-5CCTWH-SQ
- Size: 6"
- Trims: White

Model:	LB6R	LL6R	LL6S
Short Description:	6" Round Super Thin Economy	6" Round Super Thin Ultimate	6" Square Super Thin Ultimate
Power (W):	14 W	17 W	17 W
Warm 2700 K (lm):		950	1000
Soft 3000 K (lm):	900	980	1050
Bright 3500 K (lm):			
Neutral 4000 K (lm):	930	1000	1100
Daylight 5000 K (lm):		1050	
Dim to Warm DTW (K):		28-20K 35-20K	
User Selectable CC (K):			
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	80	90	80
Beam Angle:	110°		
Rated Life (LM70 Hours):	36,000	50,000	
Warranty (Years):	5 YearCom.	10 Res. / 5 Com.	
Certifications:	UL ES T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	6 1/4"		
Dimensions (Outside):	6 7/8"	7 1/2"	6 3/4"

Model:	LED-6-S12W-5CCT-R-BF	LED-6-S12W	LED-6-S12W-5CCTWH-SQ
Short Description:	6" Round Regressed Baffle 5CCT	6" Round Budget 3K, 4K or 5CCT	6" Square Budget 5CCT
Power (W):	12 W		
Warm 2700 K (lm):	940	800	890
Soft 3000 K (lm):	990	800	940
Bright 3500 K (lm):	1050	800	1000
Neutral 4000 K (lm):	1070	820	1015
Daylight 5000 K (lm):	1040	800	980
Dim to Warm DTW (K):			
User Selectable CC (K):	5 CCT		
Input Voltage:	120 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	No		
Color Rendering Index CRI:	80		
Beam Angle:	110°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Year		
Certifications:	cETLus, Energy Star		
Fixture IP Grade:	Damp		
Cut Out:	6 1/4"		
Dimensions (Outside):	6 7/8"		

COMMERCIAL RECESSED



Model #: TP120-347-RT4-C-DIM-G1-ES
Size: 4"
Trims: White, Black & Silver Trims with White Reflector

Model #: TP120-347-RT6-C-DIM-G1-ES
Size: 6"
Trims: White, Black & Silver Trims with White Reflector

Model #: TP120-347-RT8-C-DIM-G1-ES
Size: 8"
Trims: White, Black & Silver Trims with White Reflector

Model #: TP120-347-RT9.5-C-DIM-G1-ES
Size: 10"
Trims: White, Black & Silver Trims with White Reflector

Model:	TP120-347-RTX-C-DIM-G1-ES			
Short Description:	Round 3 CCT 3 Wattage Selectable			
Size	4"	6"	8"	10"
Power (W):	5.5/8/12 W	7/10/18 W	10/15/22 W	20/25/32 W
Warm 2700 K (lm):				
Soft 3000 K (lm):	500 lm at 5.5W	700 lm at 7W	1000 lm at 10W	2000 lm at 20W
Bright 3500 K (lm):	700 lm at 8W	1000 lm at 10W	1500 lm at 15W	2500 lm at 55W
Neutral 4000 K (lm):	1000 lm at 12W	1500 lm at 18W	2000 lm at 22W	3000 lm at 32W
Daylight 5000 K (lm):				
Dim to Warm DTW (K):				
User Selectable CC (K):	3 CCT - 30-35-40			
Input Voltage:	120V - 347V AC 0-10V Dimmable			
Dimmable Triac:	No			
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	90+			
Beam Angle:	83°	88°	90°	92°
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	UL, ES			
Fixture IP Grade:	Wet IP54			
Cut Out:	5 1/4"	7 1/2"	9 1/2"	10 1/2"
Dimensions (Outside):	5 15/16"	8 1/4"	10 1/4"	11 1/2"



Model #: LB8R
Size: 8"
Trims: White & Black



Model #: LY82RCD
Size: 8"
Trims: White & Black



Model #: LL8R
Size: 8"
Trims: White & Black



Model #: LL10R
Size: 10"
Trims: White & Black

Model:	LB8R	LY82RCD	LL8R	LL10R
Short Description:	8" Round Budget Super Thin	8" Round Slim	8" Round Recessed High Output	10" Round Recessed High Output
Power (W):	18 W	33 W	40 W	50 W
Warm 2700 K (lm):				
Soft 3000 K (lm):	1200	2200	4500	6500
Bright 3500 K (lm):				
Neutral 4000 K (lm):	1260	2400	4700	6700
Daylight 5000 K (lm):				
Dim to Warm DTW (K):				
User Selectable CC (K):				
Input Voltage:	120 V - 347 V AC			
Dimmable Triac:	Yes		No	
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	80			
Beam Angle:	110°		45°	60°
Rated Life (LM70 Hours):	36,000	50,000		
Warranty (Years):	5 Year	10 Res. 5 Com.	5 Year	
Certifications:	UL, ES	cULus, Energy Star	UL, ES	UL
Fixture IP Grade:	Wet IP54		Wet Location IP65	
Cut Out:	8"		8 1/2"	11"
Dimensions (Outside):	9"		9 1/2"	12"



PUCKS



- Model #: AD-108
- Size: 1"
- Trims: White

- Model #: AD-107T
- Size: 3"
- Trims: White, Black and Nickel
all 3 included in package

Model:	AD-108	AD-107T
Short Description:	Mini Puck Light 1" 12V	Puck Light 3" 12V
Power (W):	1 W	2.2 W
Warm 2700 K (lm):		
Soft 3000 K (lm):	70	150
Bright 3500 K (lm):		
Neutral 4000 K (lm):		170
Daylight 5000 K (lm):		
Dim to Warm DTW (K):		
User Selectable CC (K):		
Input Voltage:	12 V DC	
Triac Dimmable:	Yes	
0-10V Dimmable:	No	
Color Rendering Index CRI:	90+	
Beam Angle:	100°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	3 Year	
Certifications:	ETL	
Approved Location:	Damp	
Dimensions:	1 5/16"	3"
Thickness:	5/8"	1/8"

STEP LIGHTS

- Model #: LSD
- Size: 4.5"
- Trims: White & Black



- Model #: LSD03
- Size: 4.5"
- Trims: White & Black



- Model #: LSD04
- Size: 4.5"
- Trims: White & Black

Model:	LSD	LSD03	LSD04
Short Description:	Step Light Horizontal or Vertical Installation 3K, 4K, 5CCT & Dim to Warm	Step Light Horizontal With Motion Sensor and Photocell	Step Light Vertical With Motion Sensor and Photocell
Power (W):	2.5 W		
Warm 2700 K (lm):	83		
Soft 3000 K (lm):	125 / 87 5CCT	80	
Bright 3500 K (lm):	93		
Neutral 4000 K (lm):	125 / 96 5CCT		
Daylight 5000 K (lm):	95		
Dim to Warm DTW (K):	3000-2000K		
User Selectable CC (K):	5 CCT		
Input Voltage:	120 V AC		
Triac Dimmable:	Yes	No	
0-10V Dimmable:	No		
Color Rendering Index CRI:	90+		
Beam Angle:	60°	90°	
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	5 Year		
Certifications:	ETL		
Approved Location:	Wet IP54		
Dimensions:	4 1/2" x 2 3/4"		
Thickness:	2"	1"	1"



SURFACE / J-BOX MOUNT



- Model #: LBL-JB10W
- Size: 4"
- Trims: Round & Square, White & Black



- Model #: CSC3017
- Size: 6"
- Trims: Round White



- Model #: LED-S8W-MT
- Size: 4"
- Trims: Round White, Black & Nickel



- Model #: CSC3025
- Size: 6"
- Trims: Round White

Model:	LBL-JB10W	LED-S8W-MT	CSC3017	CSC3025
Short Description:	5" Round & Square Recessed J-Box Mount 5CCT	4" Round Multi Fit J-box or Can, 3K, 4K or 5CCT	Round Surface Mount Backlit 3K	6" Round Surface Mount with Motion Sensor 3K or 4K
Power (W):	10 W	8 W	15 W	
Warm 2700 K (lm):	600	515		
Soft 3000 K (lm):	650	530	900	
Bright 3500 K (lm):	715	540		
Neutral 4000 K (lm):	740	560		900
Daylight 5000 K (lm):	730	550		
Dim to Warm DTW (K):				
User Selectable CC (K):	5 CCT			
Input Voltage:	120 V AC			
Triac Dimmable:	Yes			No
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100º			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	ETL ES		ETL	
Approved Location:	Wet IP54			
Dimensions (Outside):	5 1/4"	4 7/8"	7 3/8"	8"
Thickness:	1"	1"	1"	1 3/8"



- Model #: ADS5R9
- Size: 5"
- Trims: Round White in stock, Black & Nickel optional



- Model #: ADS7R9
- Size: 7"
- Trims: Round White in stock, Black & Nickel optional



- Model #: ADS12R9
- Size: 12"
- Trims: Round White in stock, Black & Nickel optional




- Model #: ADS15R
- Size: 15"
- Trims: Round White in stock, Black & Nickel optional



Model:	ADS5R9	ADS7R9	ADS12R9	ADS15R
Short Description:	5" Round Surface Mount Edgelit 5CCT	7" Round Surface Mount Edgelit	12" Round Surface Mount Edgelit	15" Round Surface Mount Edgelit 3CCT
Power (W):	10 W	15 W	22 W	30 W
Warm 2700 K (lm):	515			
Soft 3000 K (lm):	540	900	1400	1940
Bright 3500 K (lm):	575			
Neutral 4000 K (lm):	575	900	1400	2090
Daylight 5000 K (lm):	560			1960
Dim to Warm DTW (K):				
User Selectable CC (K):	5 CCT			3 CCT
Input Voltage:	120 V AC			
Triac Dimmable:	Yes			
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	ETL ES	ETL Energy Star		
Approved Location:	Wet IP54			
Dimensions (Outside):	5 3/8"	7 7/8"	12"	15"
Thickness:	5/8"	5/8"	1"	1"



LED BARS

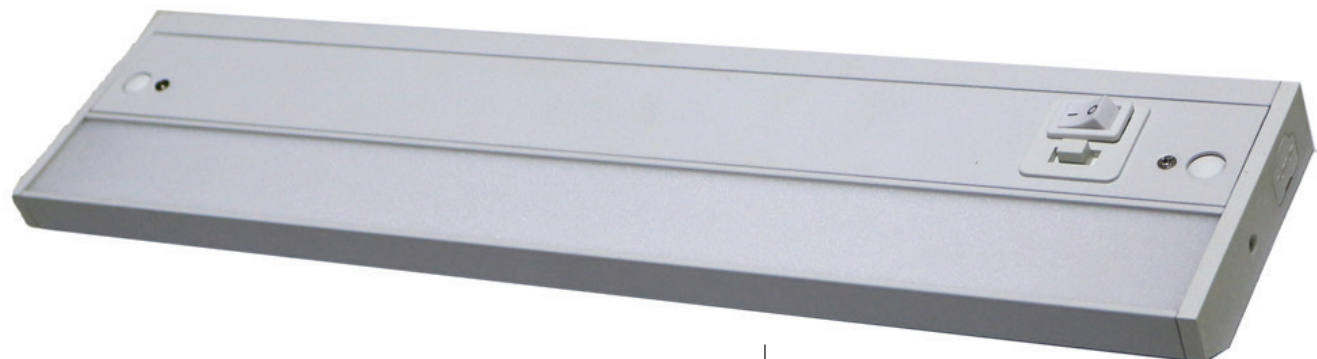

- Model #: UCL1001-8-LED
- Size: 8"
- Trims: White

- Model #: UCL1001-16-LED
- Size: 16"
- Trims: White

- Model #: UCL1001-24-LED
- Size: 24"
- Trims: White

- Model #: UCL1001-32-LED
- Size: 32"
- Trims: White

Model:	UCL1001-8-LED	UCL1001-16-LED
Short Description:	8" Under Cabinet Bar	16" Under Cabinet Bar
Power (W):	6 W	10 W
Warm 2700 K (lm):	440	880
Soft 3000 K (lm):	450	900
Bright 3500 K (lm):		
Neutral 4000 K (lm):	460	920
Daylight 5000 K (lm):		
Dim to Warm DTW (K):		
User Selectable CC (K):	3 CCT	
Input Voltage:	120V AC	
Triac Dimmable:	Yes	
0-10V Dimmable:	No	
Color Rendering Index CRI:	90+	
Beam Angle:	100°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	5 Year	
Certifications:	ETL	
Approved Location:	Damp	
Dimensions:	8"	16"
Thickness:	1"	

Model:	UCL1001-24-LED	UCL1001-32-LED
Short Description:	24" Under Cabinet Bar	32" Under Cabinet Bar
Power (W):	14 W	16 W
Warm 2700 K (lm):	1000	1150
Soft 3000 K (lm):	1050	1200
Bright 3500 K (lm):		
Neutral 4000 K (lm):	1100	1250
Daylight 5000 K (lm):		
Dim to Warm DTW (K):		
User Selectable CC (K):	3 CCT	
Input Voltage:	120V AC	
Triac Dimmable:	Yes	
0-10V Dimmable:	No	
Color Rendering Index CRI:	90+	
Beam Angle:	100°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	5 Year	
Certifications:	ETL	
Approved Location:	Damp	
Dimensions:	24"	32"
Thickness:	1"	

LED STRIPS



Model #: LBL-COB-384-24V-8MM
Size: 16 ft / 5 m



Model #: LBL-COB-384-24V-10MM-IP65
Size: 16 ft / 5 m



Model #: LBL-2216-126P-24V
Size: 100 ft / 30 m

Model #: LBL-2216-238P-24V
Size: 100 ft / 30 m

Model:	LBL-COB-384-24V-8MM	LBL-COB-384-24V-10MM-IP65
Short Description:	Indoor COB LED Strip 3 W/ft	Outdoor COB LED Strip 3 W/ft
Power (W):	3 W / ft	
Warm 2700 K (lm):	290 lm / ft	
Soft 3000 K (lm):	300 lm	
Bright 3500 K (lm):		
Neutral 4000 K (lm):	330 lm / ft	
Daylight 5000 K (lm):	330 lm / ft	
Dim to Warm DTW (K):		
User Selectable CC (K):		
Input Voltage:	24 V DC	
Triac Dimmable:	Depending on Driver	
0-10V Dimmable:		
Color Rendering Index CRI:	90+	
Beam Angle:	180°	
Rated Life (LM70 Hours):	20,000	
Warranty (Years):	3 Year	
Certifications:	ETL	
Approved Location:	Dry	Wet IP65
Roll Length:	16 ft / 5 m	
Maximum Connection Length:	16 ft / 5 m	

Model:	LBL-2216-126P-24V	LBL-2216-238P-24V
Short Description:	Indoor SMT LED Strip 1.5 W/ft	Indoor SMT LED Strip 3 W/ft
Power (W):	1.5 W / ft	3 W / ft
Warm 2700 K (lm):	190 lm / ft	290 lm / ft
Soft 3000 K (lm):	200 lm / ft	300 lm / ft
Bright 3500 K (lm):		
Neutral 4000 K (lm):	210 lm / ft	310 lm / ft
Daylight 5000 K (lm):	220 lm / ft	320 lm / ft
Dim to Warm DTW (K):		
User Selectable CC (K):		
Input Voltage:	24 V DC	
Triac Dimmable:	Depending on Driver	
0-10V Dimmable:		
Color Rendering Index CRI:	90+	
Beam Angle:	120°	
Rated Life (LM70 Hours):	20,000	
Warranty (Years):	3 Year	
Certifications:	ETL	
Approved Location:	Dry	
Roll Length:	100 ft / 30 m	
Maximum Connection Lengths:	50 ft / 15 m	33 ft / 10 m

DC OUTPUT DRIVERS 12W TO 96W



- Model #: HBL024-120-12-D
- Output: 12V 24W
- Connection Type: Hard Wired



- Model #: WLS-PD30LU-24
- Output: 12V 12W
- Connection Type: Plug-In

Model:	HBL024-120-12-D	WLS-PD30LU-24
Short Description:	12V 24W Hard Wired Driver Dimmable	12V 12W Plug-In Driver Not Dimmable
Input Voltage (V AC):	120 V DC	120V - 240V AC
Output Voltage (V DC):	12	12
Output Wattage (W) :	24 W	12 W
Dimmability:	Triac	Not Dimmable
Approved Location:		Damp
Rated Life (Hours):		20,000
Warranty (Years):		3 Year
Certifications:		ETL
Dimensions:	5" x 4" x 1 1/4"	3" x 1 1/2" x 1 1/2"



- Model #: LBL-DC24V30W
- Output: 24V 30W
- Connection Type: Hard Wired or Plug-In



- Model #: LBL-DC24V96W
- Output: 24V 96W
- Connection Type: Hard Wired or Plug-In

Model:	LBL-DC24V30W	LBL-DC24V96W
Short Description:	24V 30W Hard Wired or Plug-In Driver Dimmable	24V 96W Hard Wired or Plug-In Driver Dimmable
Input Voltage (V AC):	120 V DC	
Output Voltage (V DC):	24	24
Output Wattage (W) :	30 W	96 W
Dimmability:	Triac	Triac & 0-10V
Approved Location:	WET IP67	
Rated Life (Hours):	20,000	
Warranty (Years):	3 Year	
Certifications:	ETL	cULus
Dimensions:	6 1/2" x 1 5/8" x 7/8"	9" x 2 1/2" x 3/4"



DC OUTPUT DRIVERS 5-IN-1 DIMMABLE 60W TO 288W



- Model #: SMT-024-060VTDHV2
- Output: 24V 60W
- Connection Type: Hard Wired



- Model #: SMT-024-096VTDHV2
- Output: 24V 96W
- Connection Type: Hard Wired



- Model #: SMT-024-192VTD52JV2
- Output: 24V 192W
- Connection Type: Hard Wired




- Model #: SMT-024-288VTD52JV2
- Output: 24V 288W
- Connection Type: Hard Wired

Model:	SMT-024-060VTDHV	SMT-024-096VTDHV
Short Description:	Hard Wired Drivers with Wiring Compartments 5-in-1 Dimmable	
Input Voltage (V AC):	120V - 277V AC	
Output Voltage (V DC):	24V DC	
Output Wattage (W) :	60 W	96 W
Dimmability:	Triac, 0-10V, 1-10V, Potentiometer, 10V PWM	
Approved Location:	Wet	
Rated Life (Hours):	50,000	
Warranty (Years):	7 Year	
Certifications:	UL	
Dimensions:	7 3/8" x 3 1/2" x 1 5/8"	8 3/4" x 3 1/2" x 1 3/4"

Model:	SMT-024-192VTD52JV2	SMT-024-288VTD52JV2
Short Description:	Hard Wired Drivers with Wiring Compartments 5-in-1 Dimmable	
Input Voltage (V AC):	120V - 277V AC	
Output Voltage (V DC):	24V DC	
Output Wattage (W) :	192 W	288 W
Dimmability:	Triac, 0-10V, 1-10V, Potentiometer, 10V PWM	
Approved Location:	Wet	
Rated Life (Hours):	50,000	
Warranty (Years):	7 Year	
Certifications:	UL	
Dimensions:	11" x 4 1/4" x 1 3/4"	12" x 4 1/4" x 1 3/4"



DIMMERS & SWITCHES



Model #: ERC112



Model #: ERC111



Model #: EU1254

Model:	ERC111	ERC112	EU1254
Short Description:	Smart Dimmer	Smart Switch	Kinetic Switch
LED Load Capacity (W):	200 W	250 W	N/A
Input Voltage:	100 - 240V AC		
Triac Dimmable:	Triac		
Other Control:	Smart Control from App		
Warranty (Years):	3 Year		
Certifications:	ETL, FCC		
Approved Location:	Dry		

3 IN 1 EMERGENCY LIGHT KINETIC DOOR BELL



Model #: AL-300N



Model #: LBL-KDB-1

Model:	AL-300N	LBL-KDB-1
Short Description:	3 in 1 Night & Emergency Light	Kinetic Doorbell Wireless Batteryless
Power (W): (W):	1 W	0.1 / 0.6 W
Input Voltage:	100 - 240V AC	
Warranty (Years):	1 Year	2 Year
Certifications:	ETL, FCC	
Approved Location:	Dry	Transmitter Wet / Receiver Dry



Lotus LED Lights
www.lotusledlights.com

USA: 360-200-5500

Canada: 604-538-3090

Toll Free: 1-844-24-LOTUS
(1-844-245-6887)

