
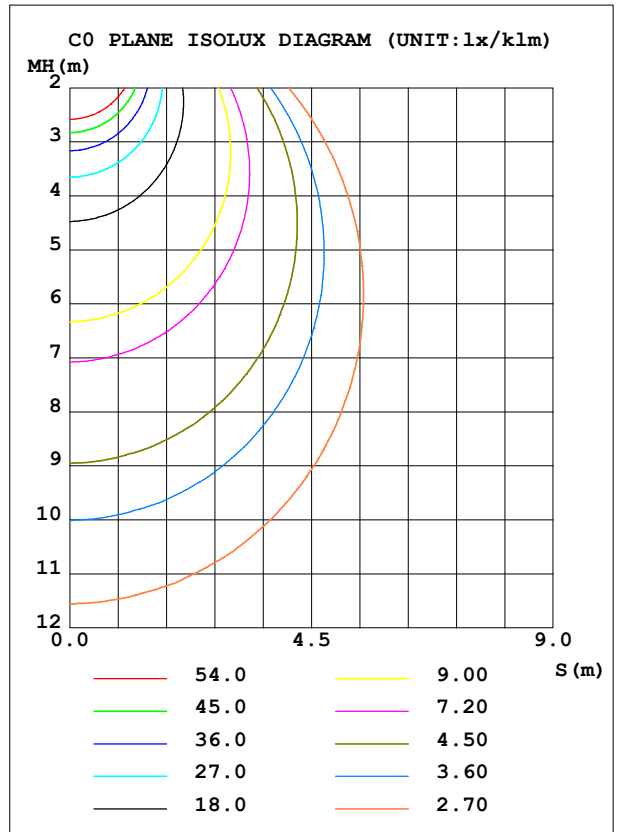


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd/klm)	361.3	S/MH (C0/180)	1.25
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm/klm)	1000.0	η UP, DN (C0-180)	0.0,50.0
NOMINAL FLUX (lm)	716.992	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

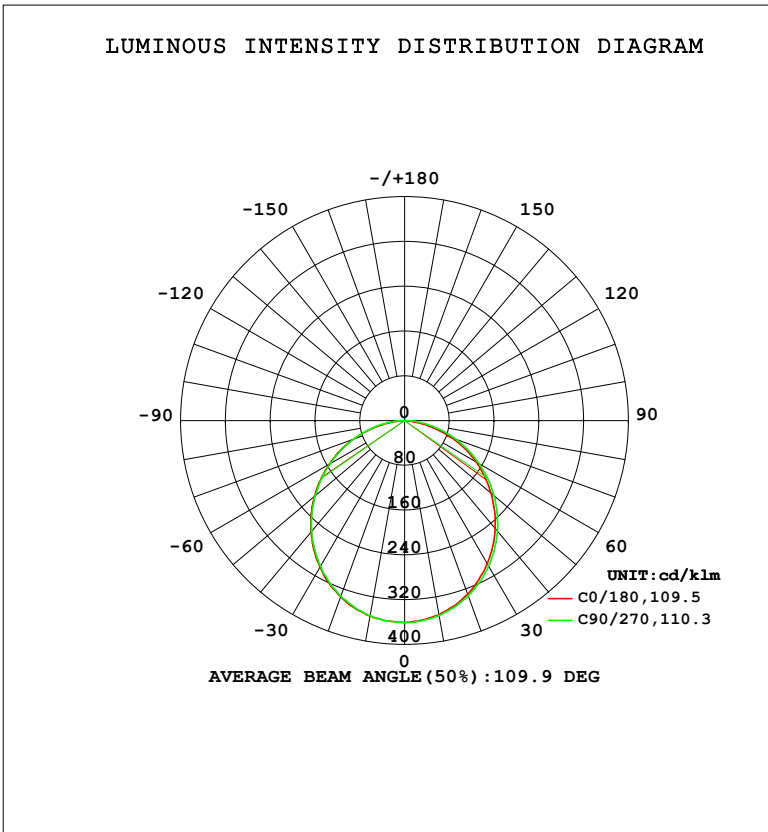

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	352.3	352.1	353.7	353.5	354.5	354.6	353.8	352.7	0- 10	34.08	34.08	3.41,3.41
20	329.7	330.8	332.7	334.7	334.8	334.3	333.8	331.6	10- 20	97.25	131.3	13.1,13.1
30	295.4	297.1	300.4	301.4	302.4	302.3	300.4	298.3	20- 30	146.4	277.7	27.8,27.8
40	251.9	254.9	257.9	259.0	260.0	259.2	257.8	255.3	30- 40	174.9	452.6	45.3,45.3
50	201.7	204.8	208.3	209.8	210.2	209.4	208.4	205.3	40- 50	179.6	632.2	63.2,63.2
60	147.4	150.5	153.9	155.0	155.6	154.3	153.3	150.2	50- 60	161.1	793.3	79.3,79.3
70	89.23	93.95	97.83	98.72	97.54	97.29	96.16	93.19	60- 70	123.0	916.3	91.6,91.6
80	28.30	35.20	43.50	39.76	35.90	38.08	41.91	33.53	70- 80	69.72	986.0	98.6,98.6
90	0.3641	0.3817	0.4233	0.3802	0.2021	0.2269	0.2785	0.2439	80- 90	13.98	1000	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

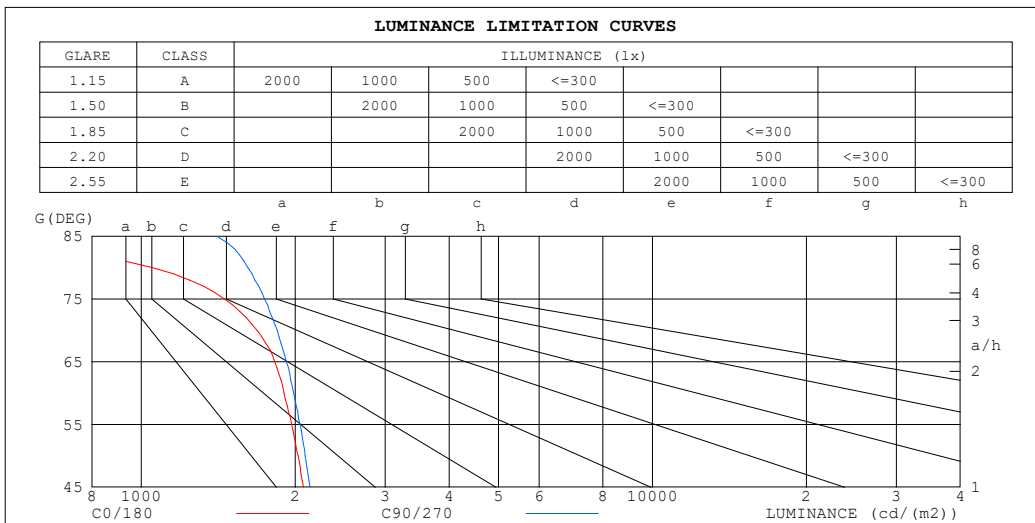

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	160	1405
80	1051	1617
75	1454	1743
70	1684	1846
65	1824	1920
60	1902	1986
55	1968	2043
50	2025	2091
45	2078	2137


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.64	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.46	.40	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.38	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.31	.26	.24

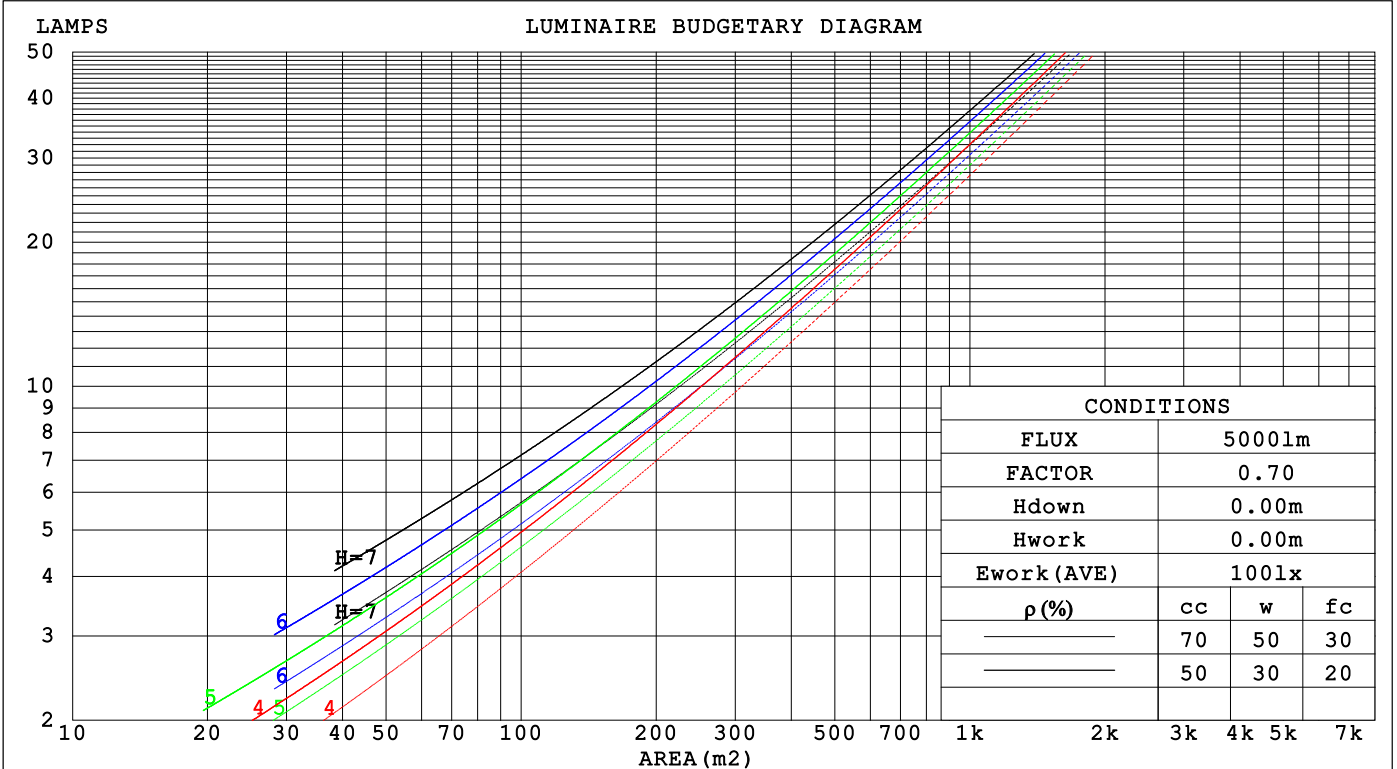

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.304	.173	.055	.297	.169	.054	.284	.163	.052	.272	.157	.050	.260	.151	.049	
2.0	.288	.158	.048	.282	.155	.048	.271	.150	.047	.260	.146	.046	.250	.141	.045	
3.0	.268	.142	.043	.262	.140	.042	.252	.137	.041	.242	.133	.041	.234	.129	.040	
4.0	.247	.129	.038	.243	.127	.038	.233	.124	.037	.225	.121	.036	.217	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.217	.113	.033	.209	.110	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.105	.030	.202	.103	.030	.195	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.166	.085	.025	
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.161	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.141	.099	.065	.097	.068	.045	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.064	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm										
NAME: RF-LED-4-S9W-5CCTWH-PL				TYPE:			WEIGHT:			
SPEC.: 3500K 80				DIM.:			SERIAL No.:			
MFR.: LTS				SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.3	17.8	16.6	18.0	18.2	16.5	18.0	16.8	18.2	18.4
3H	17.8	19.2	18.1	19.4	19.7	18.1	19.5	18.4	19.7	19.9
4H	18.3	19.6	18.6	19.9	20.1	18.7	20.0	19.0	20.3	20.5
6H	18.6	19.8	18.9	20.1	20.4	19.2	20.4	19.5	20.7	21.0
8H	18.6	19.8	18.9	20.1	20.4	19.3	20.5	19.7	20.8	21.1
12H	18.6	19.7	18.9	20.0	20.3	19.4	20.6	19.8	20.9	21.2
4H 2H	17.0	18.3	17.3	18.5	18.8	17.1	18.4	17.4	18.7	18.9
3H	18.6	19.8	18.9	20.0	20.4	18.8	20.0	19.2	20.3	20.6
4H	19.2	20.3	19.6	20.6	20.9	19.6	20.7	20.0	21.0	21.3
6H	19.6	20.5	20.0	20.9	21.2	20.2	21.1	20.6	21.5	21.9
8H	19.6	20.5	20.1	20.9	21.3	20.4	21.3	20.8	21.7	22.0
12H	19.6	20.4	20.0	20.8	21.2	20.5	21.4	21.0	21.7	22.1
8H 4H	19.5	20.4	19.9	20.7	21.1	19.8	20.7	20.2	21.1	21.5
6H	20.0	20.7	20.4	21.1	21.5	20.6	21.3	21.0	21.7	22.1
8H	20.1	20.7	20.5	21.1	21.6	20.8	21.5	21.3	21.9	22.4
12H	20.1	20.6	20.5	21.1	21.5	21.0	21.6	21.5	22.0	22.5
12H 4H	19.5	20.3	19.9	20.7	21.1	19.8	20.6	20.2	21.0	21.4
6H	20.0	20.7	20.5	21.1	21.5	20.6	21.2	21.1	21.7	22.1
8H	20.1	20.7	20.6	21.1	21.6	20.9	21.5	21.4	21.9	22.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117, 717.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	80	93	86	80	90	83	78	70
2.50	99	91	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

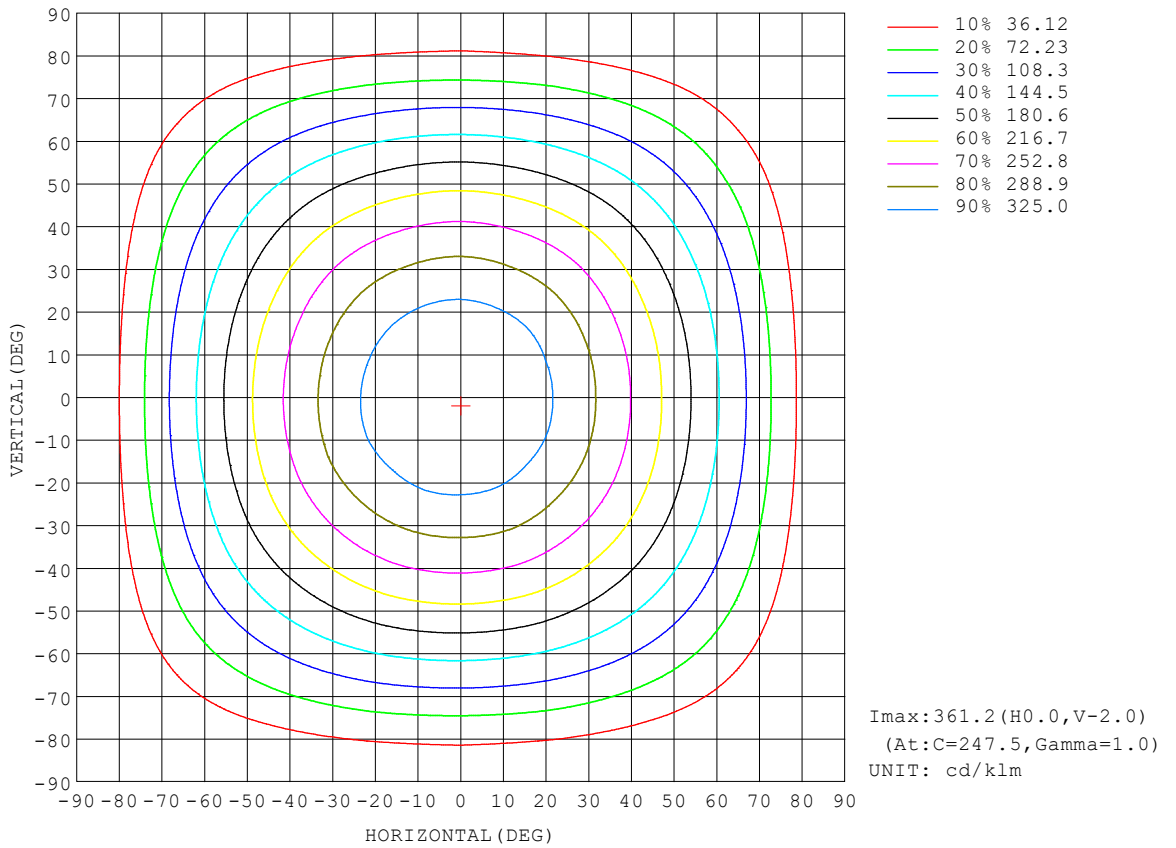


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI CURVES

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

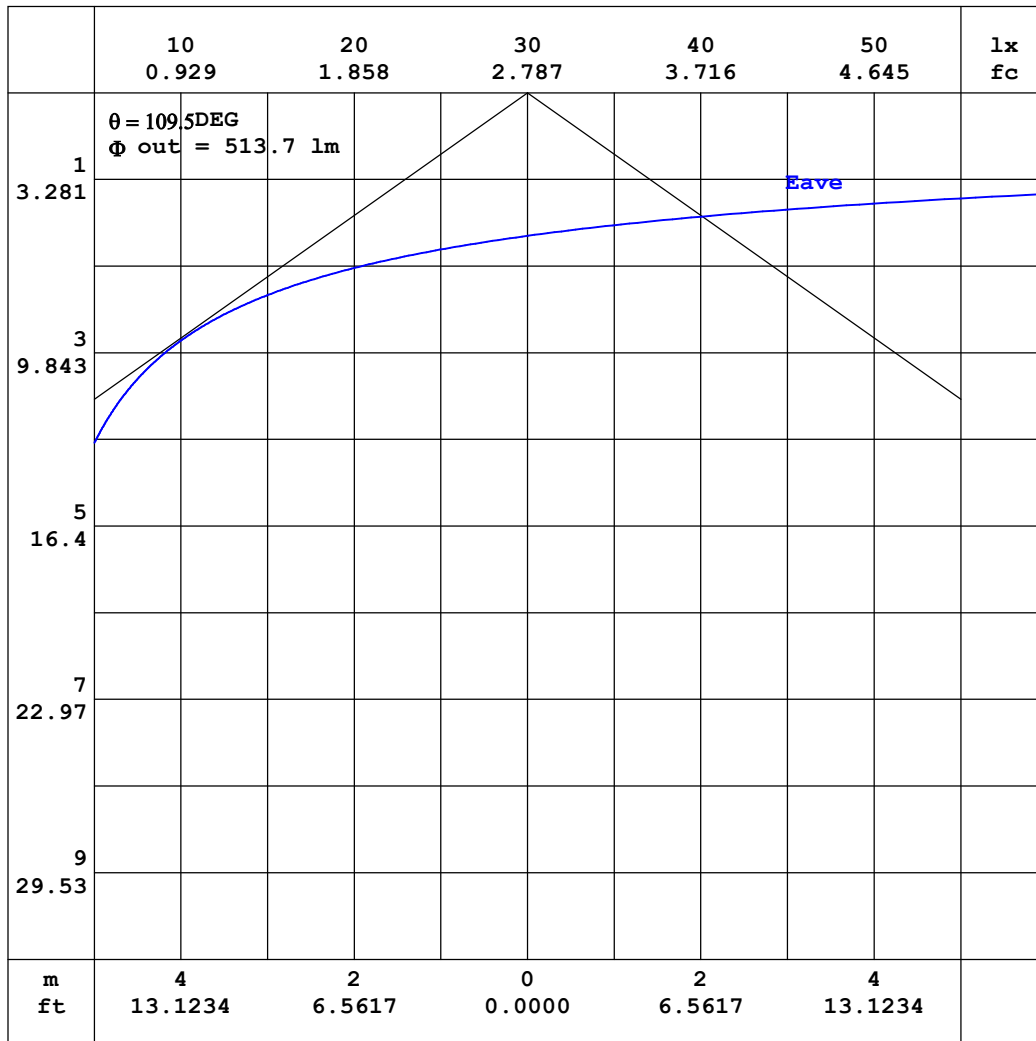


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

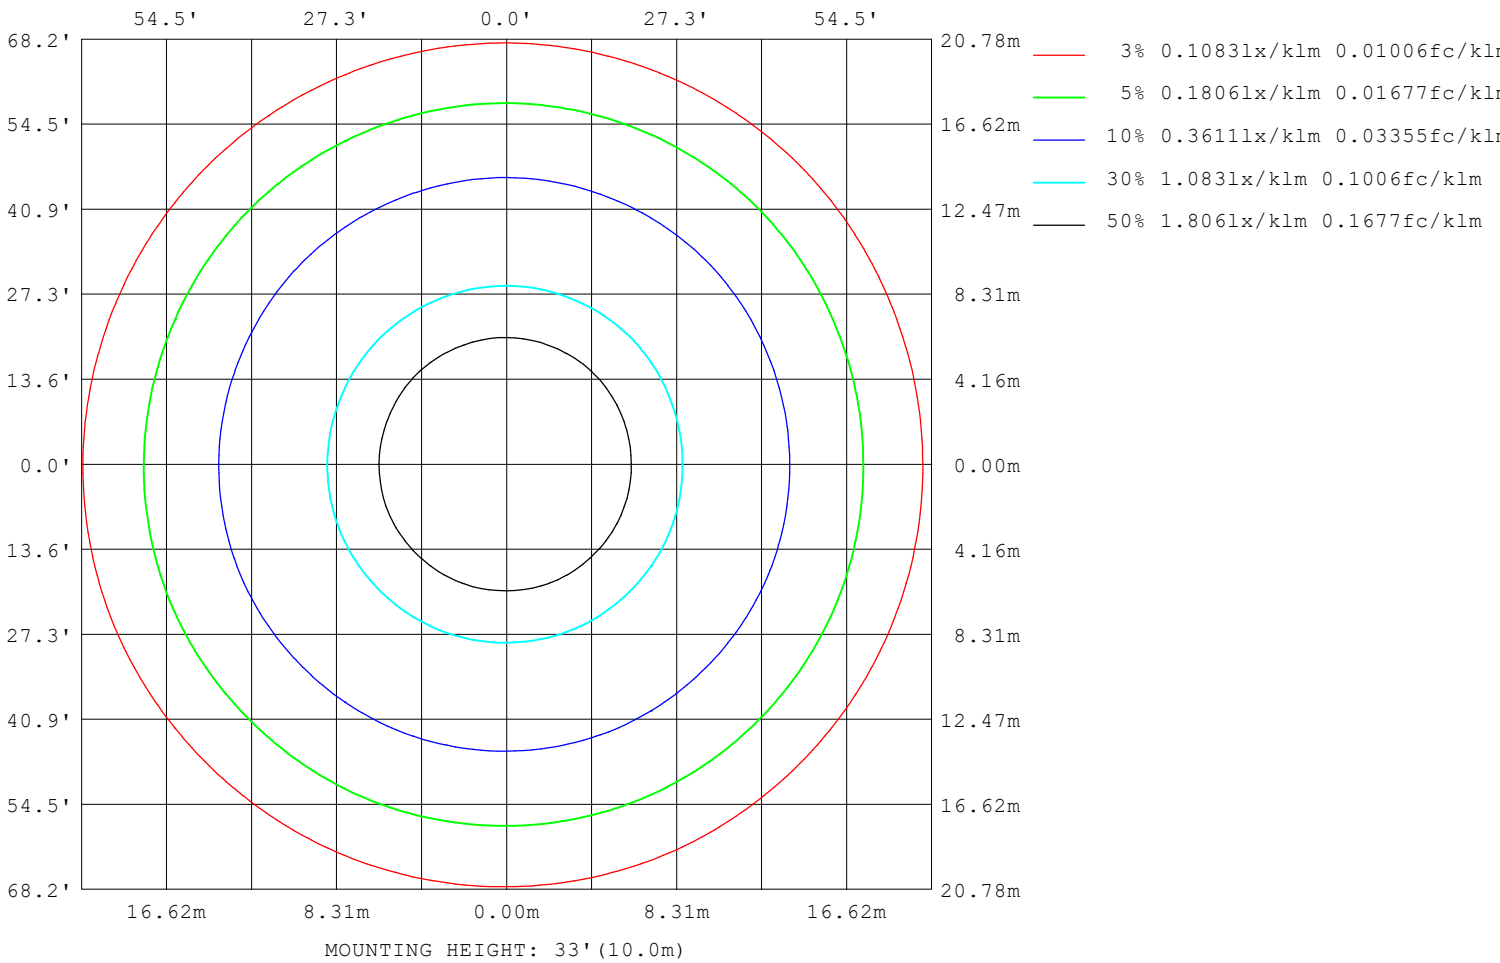

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1884
L_0~180 (75) av	1556
L_0~180 (85) av	344
L_90~270 (65) av	1912
L_90~270 (75) av	1724
L_90~270 (85) av	1345
L_45 (65) av	1899
L_45 (75) av	1650
L_45 (85) av	598

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

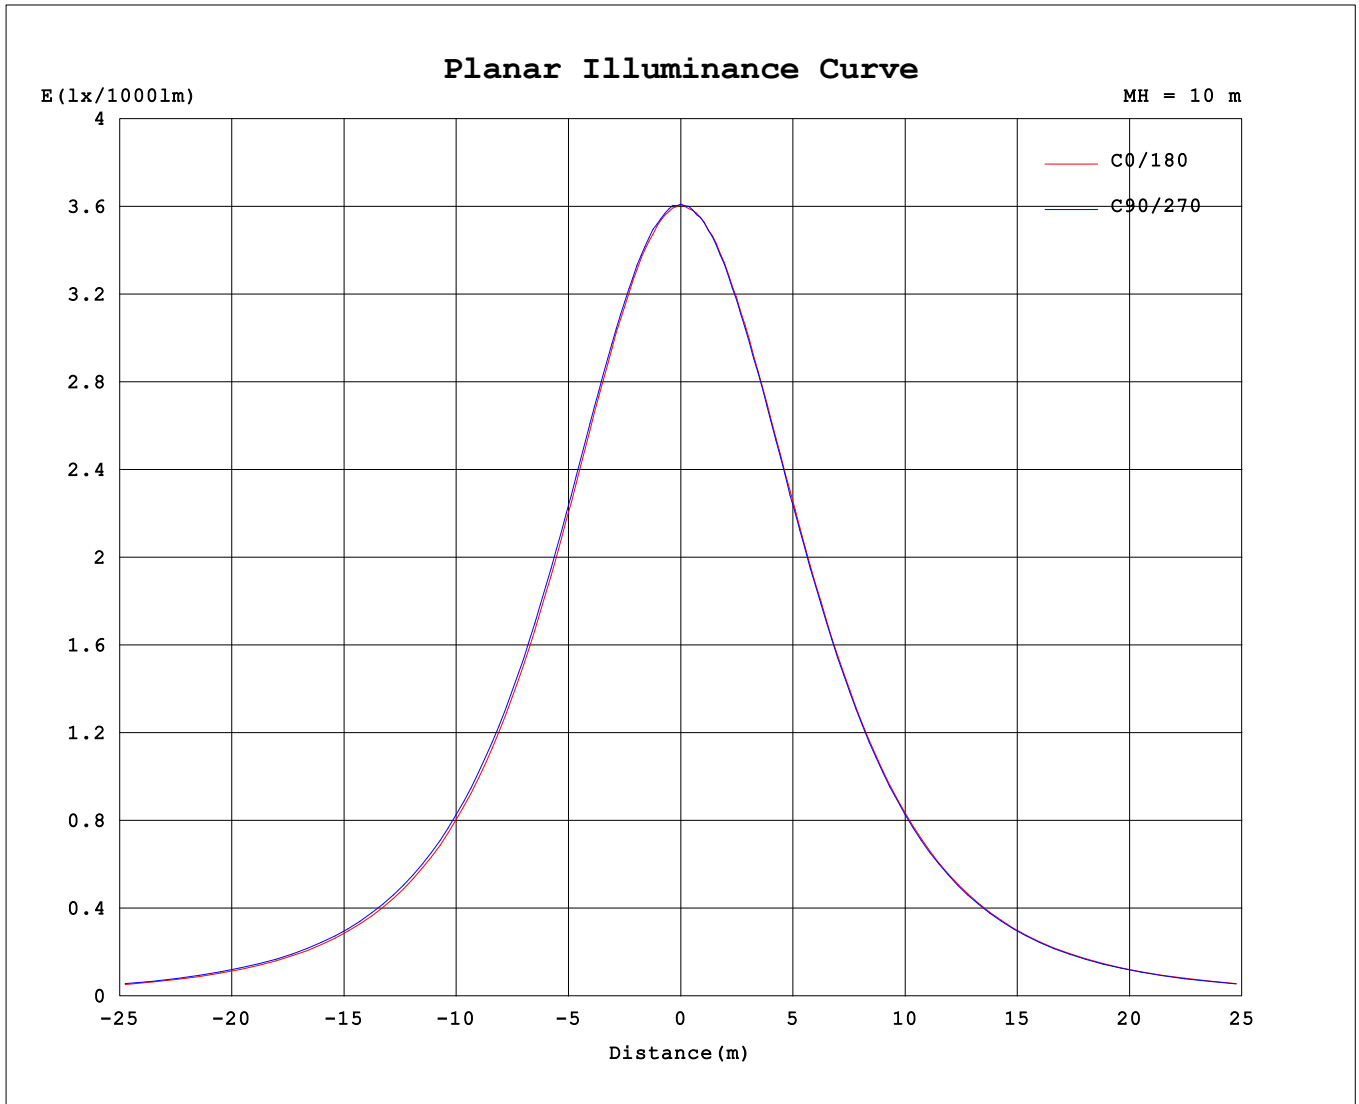

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.86V I:0.0696A P:8.0424W PF:0.9645 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:716.992x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 3500K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	361	361	361	361	361	361	360	361	361	361	361	361	361	361	360	361			
5	358	358	358	359	359	359	359	359	359	359	359	359	359	359	359	358			
10	352	352	352	353	354	354	354	355	355	355	355	354	354	353	353	352			
15	343	343	343	344	345	345	346	347	346	346	346	345	345	345	343	343			
20	330	331	331	333	333	334	335	335	335	335	334	333	334	332	332	330			
25	314	315	316	318	318	320	319	321	320	320	319	319	319	317	316	314			
30	295	297	297	300	300	302	301	303	302	302	302	300	300	299	298	296			
35	275	276	277	280	280	282	282	283	283	281	282	281	281	279	278	275			
40	252	254	255	257	258	260	259	261	260	259	259	258	258	257	255	252			
45	228	230	230	233	234	235	236	237	236	234	235	234	234	232	231	228			
50	202	203	205	207	208	210	210	211	210	209	209	208	208	206	205	202			
55	175	177	178	181	182	183	183	184	183	182	182	181	181	179	178	175			
60	147	149	151	153	154	155	155	157	156	154	154	153	153	152	150	148			
65	119	121	122	125	126	127	127	128	127	126	126	125	125	123	122	119			
70	89.2	91.6	94.0	96.5	97.8	98.4	98.7	99.1	97.5	96.9	97.3	96.5	96.2	95.1	93.2	89.7			
75	58.3	60.8	64.5	68.9	69.9	70.6	69.2	68.5	66.5	66.3	67.8	68.6	68.4	67.0	63.2	58.8			
80	28.3	30.9	35.2	41.0	43.5	42.8	39.8	38.0	35.9	35.7	38.1	40.5	41.9	38.7	33.5	28.8			
85	2.16	3.72	7.42	14.0	19.0	15.3	10.7	8.81	7.13	6.74	8.69	13.1	17.4	11.6	5.51	1.87			
90	0.36	0.37	0.38	0.42	0.42	0.42	0.38	0.38	0.20	0.21	0.23	0.28	0.28	0.28	0.24	0.23			

C Range: 0 - 360DEG γ Range: 0 - 90DEG
 C Interval: 22.5DEG γ Interval: 1.0DEG
 Test Speed: HIGH Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Temperature:25.3℃ Humidity:65.0%
 Operators: Test Distance:3.080m [K=1.0000]
 Test Date:2023-06-05 Remarks: