
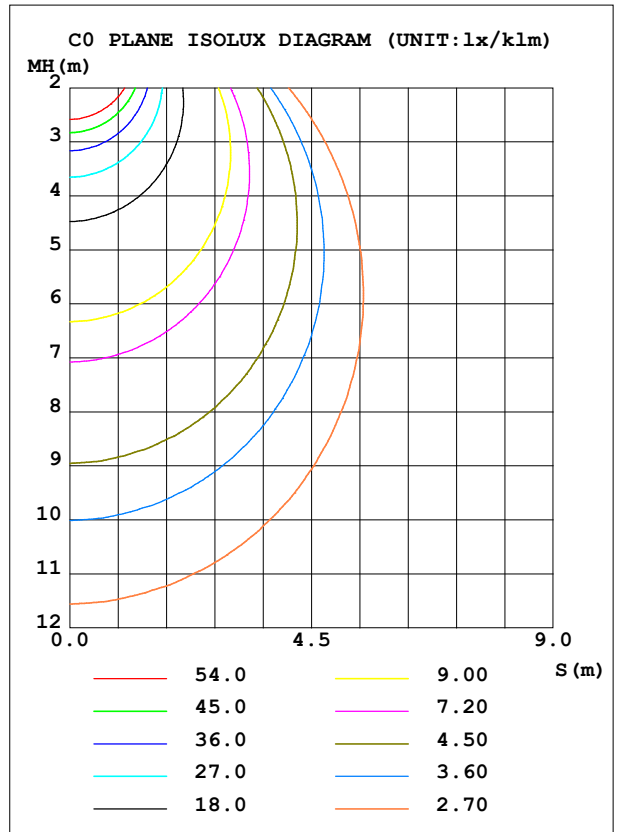


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd/klm)	360.9	S/MH (C0/180)	1.25
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm/klm)	1000.0	η UP, DN (C0-180)	0.0,50.0
NOMINAL FLUX (lm)	680.961	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

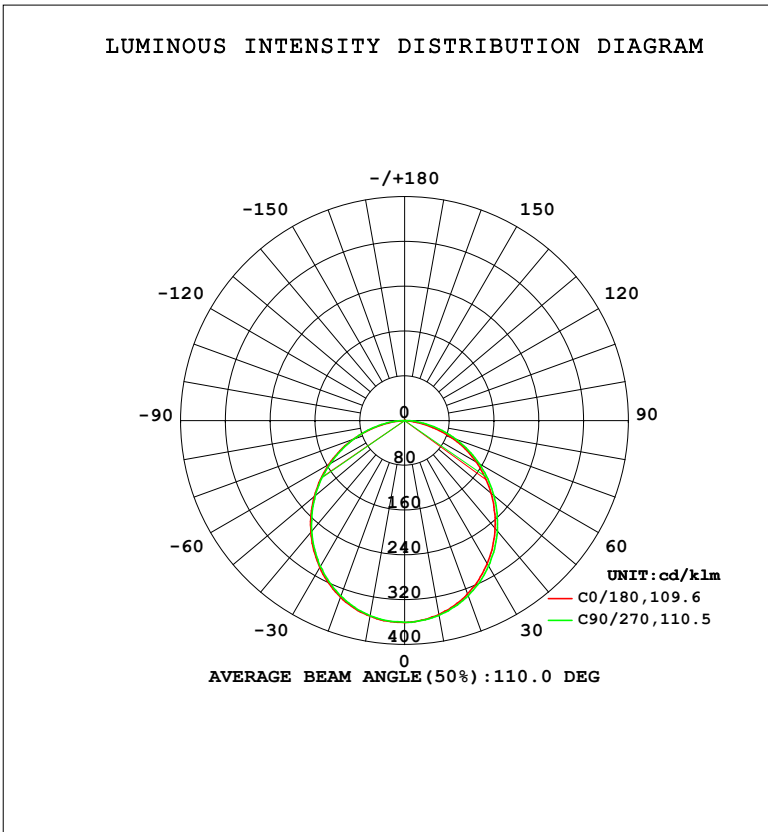

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	351.9	352.2	353.4	353.9	354.7	354.3	354.0	352.9	0- 10	34.06	34.06	3.41,3.41
20	329.1	330.2	332.7	333.9	335.8	335.0	333.8	331.3	10- 20	97.26	131.3	13.1,13.1
30	295.3	297.0	300.1	301.9	303.1	302.2	300.9	298.1	20- 30	146.4	277.7	27.8,27.8
40	251.5	254.4	257.9	259.5	260.5	259.9	258.3	254.9	30- 40	174.8	452.5	45.2,45.2
50	201.9	204.2	208.3	210.0	210.8	209.6	208.2	204.8	40- 50	179.6	632.1	63.2,63.2
60	147.3	150.4	154.2	155.5	155.9	154.7	153.4	150.1	50- 60	161.1	793.2	79.3,79.3
70	89.16	93.80	97.50	98.87	97.81	97.55	96.29	93.12	60- 70	123.0	916.3	91.6,91.6
80	28.23	34.96	43.51	39.84	36.04	38.16	41.93	33.57	70- 80	69.76	986.0	98.6,98.6
90	0.3632	0.3855	0.4300	0.3795	0.2047	0.2264	0.2737	0.2438	80- 90	13.99	1000	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

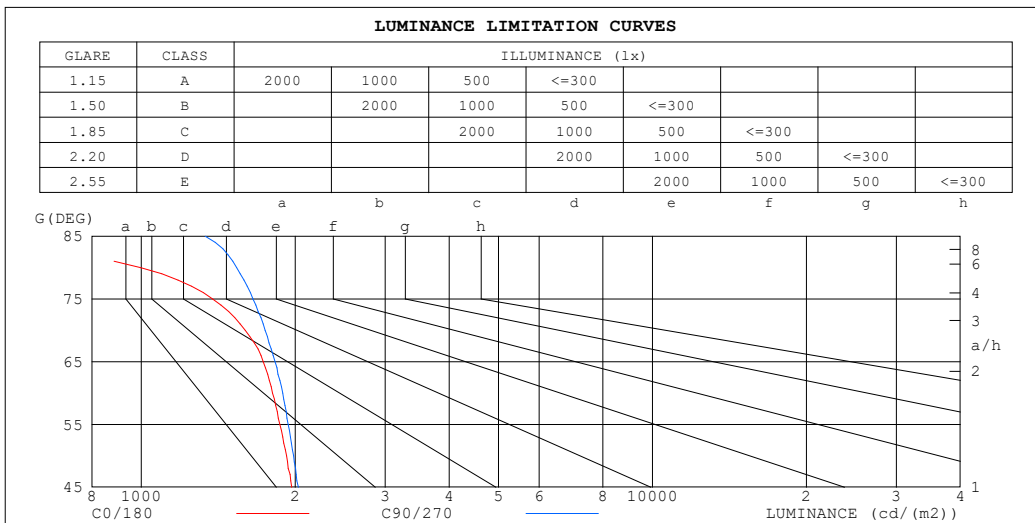

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	153	1335
80	996	1535
75	1379	1654
70	1598	1747
65	1731	1827
60	1805	1890
55	1866	1939
50	1925	1986
45	1968	2028


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.96lx1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.64	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.46	.40	.51	.45	.40	.38
7.0	.51	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.38	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

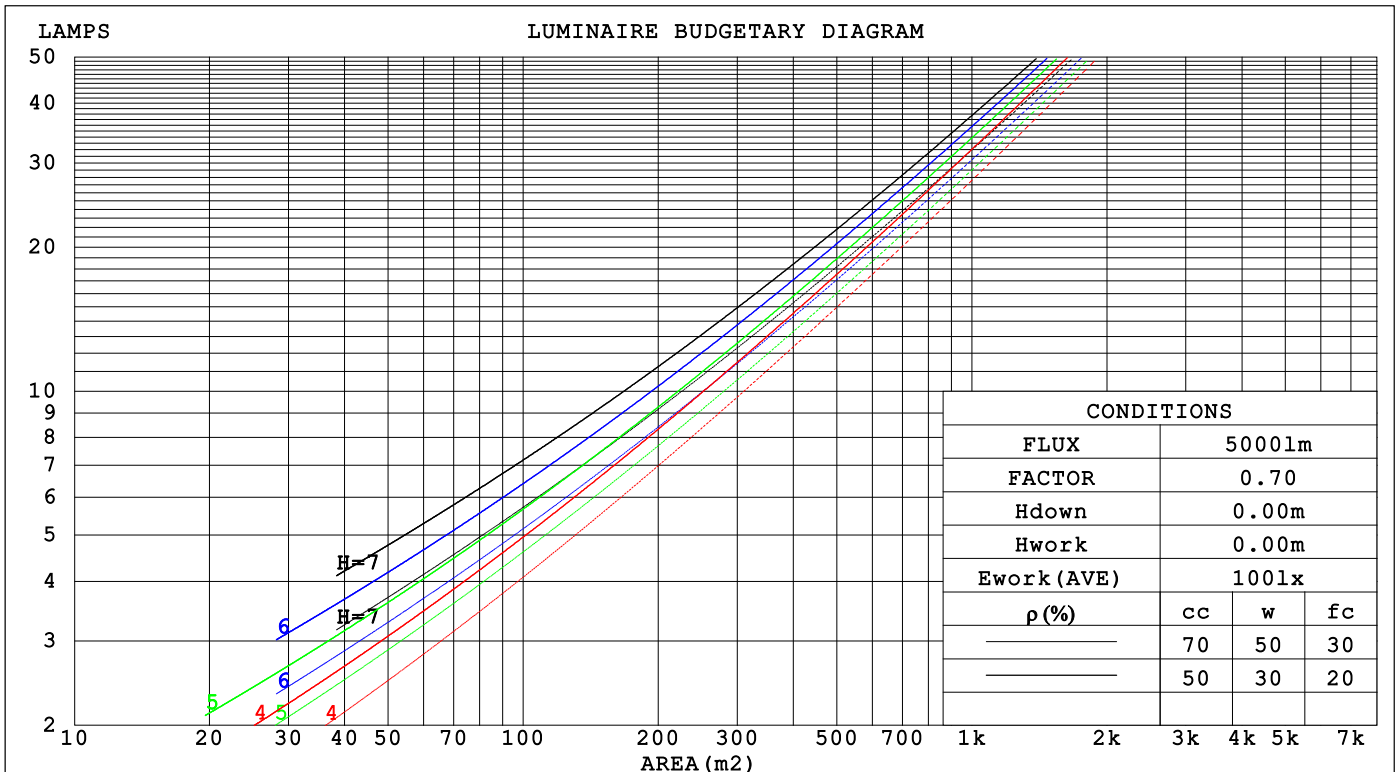

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.304	.173	.055	.297	.169	.054	.284	.163	.052	.272	.157	.050	.260	.151	.049	
2.0	.288	.158	.048	.282	.155	.048	.271	.150	.047	.260	.146	.046	.250	.141	.045	
3.0	.268	.143	.043	.262	.140	.042	.252	.137	.041	.242	.133	.041	.234	.129	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.225	.121	.036	.217	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.217	.113	.033	.209	.110	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.105	.030	.202	.103	.030	.195	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.166	.085	.025	
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.161	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.141	.099	.065	.097	.068	.045	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.3	17.8	16.6	18.0	18.2	16.5	18.0	16.8	18.2	18.4
3H	17.8	19.2	18.1	19.4	19.6	18.0	19.4	18.3	19.7	19.9
4H	18.3	19.6	18.6	19.9	20.1	18.7	20.0	19.0	20.3	20.5
6H	18.6	19.8	18.9	20.1	20.4	19.2	20.4	19.5	20.7	21.0
8H	18.6	19.8	18.9	20.1	20.4	19.3	20.5	19.7	20.8	21.1
12H	18.5	19.7	18.9	20.0	20.3	19.4	20.6	19.8	20.9	21.2
4H 2H	16.9	18.3	17.3	18.5	18.8	17.1	18.4	17.4	18.7	18.9
3H	18.6	19.7	18.9	20.0	20.3	18.8	20.0	19.2	20.3	20.6
4H	19.2	20.3	19.6	20.6	20.9	19.6	20.7	20.0	21.0	21.3
6H	19.6	20.5	20.0	20.9	21.2	20.2	21.1	20.6	21.5	21.9
8H	19.6	20.5	20.0	20.9	21.3	20.4	21.3	20.8	21.6	22.0
12H	19.6	20.4	20.0	20.8	21.2	20.5	21.3	21.0	21.7	22.1
8H 4H	19.5	20.4	19.9	20.7	21.1	19.8	20.7	20.2	21.1	21.5
6H	20.0	20.7	20.4	21.1	21.5	20.6	21.3	21.0	21.7	22.1
8H	20.1	20.7	20.5	21.1	21.6	20.8	21.5	21.3	21.9	22.4
12H	20.0	20.6	20.5	21.0	21.5	21.0	21.6	21.5	22.0	22.5
12H 4H	19.5	20.3	19.9	20.7	21.1	19.8	20.6	20.2	21.0	21.4
6H	20.0	20.6	20.5	21.1	21.5	20.6	21.2	21.0	21.7	22.1
8H	20.1	20.7	20.6	21.1	21.6	20.9	21.4	21.4	21.9	22.4

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.2

CIE Pub.117, 681.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.3)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	80	93	86	80	90	83	78	70
2.50	99	91	86	97	90	85	93	87	83	74
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

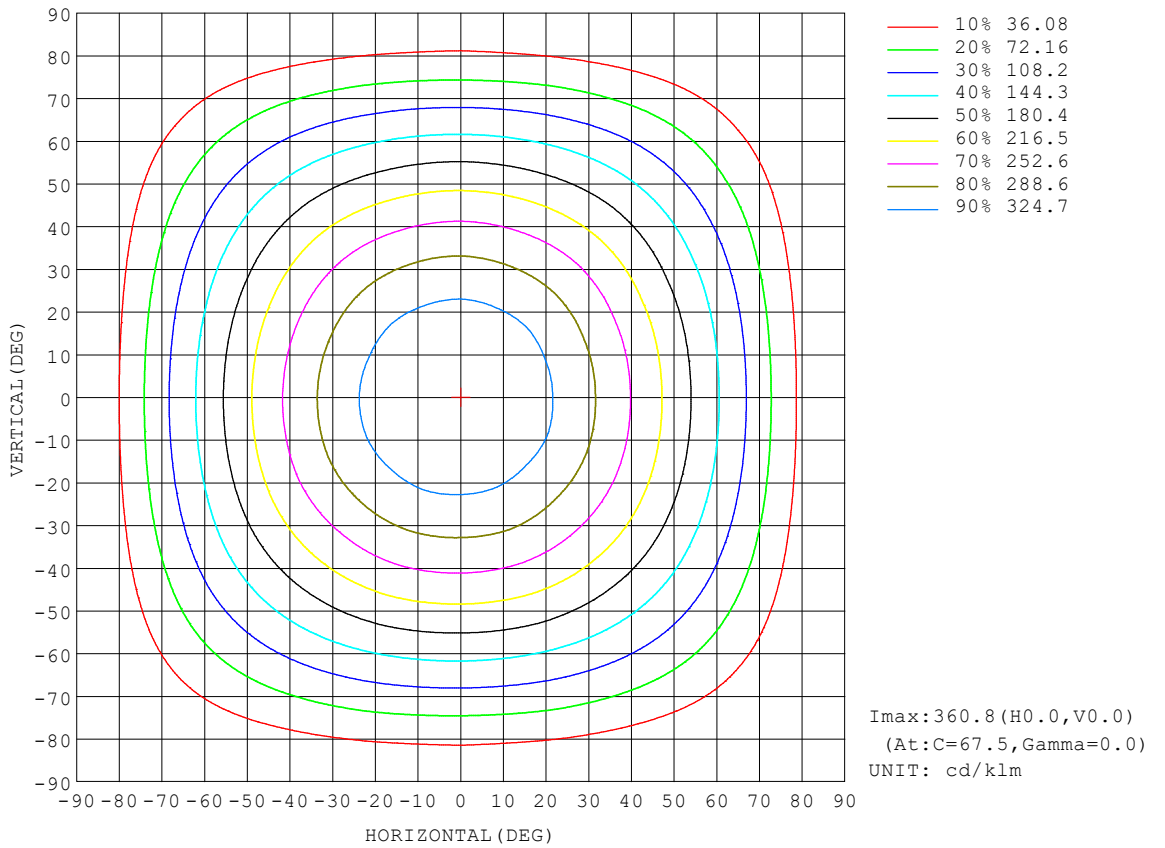


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI CURVES

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

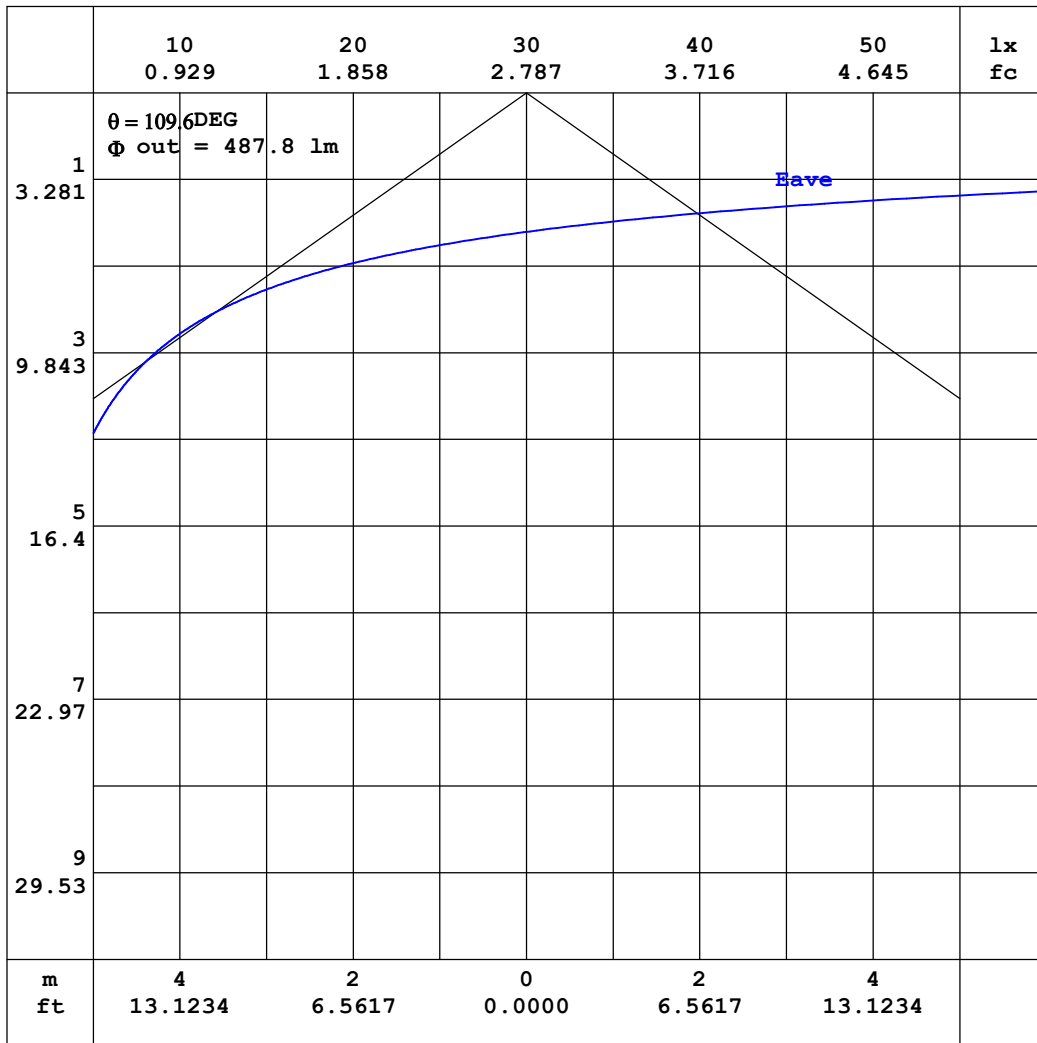


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.96lx1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

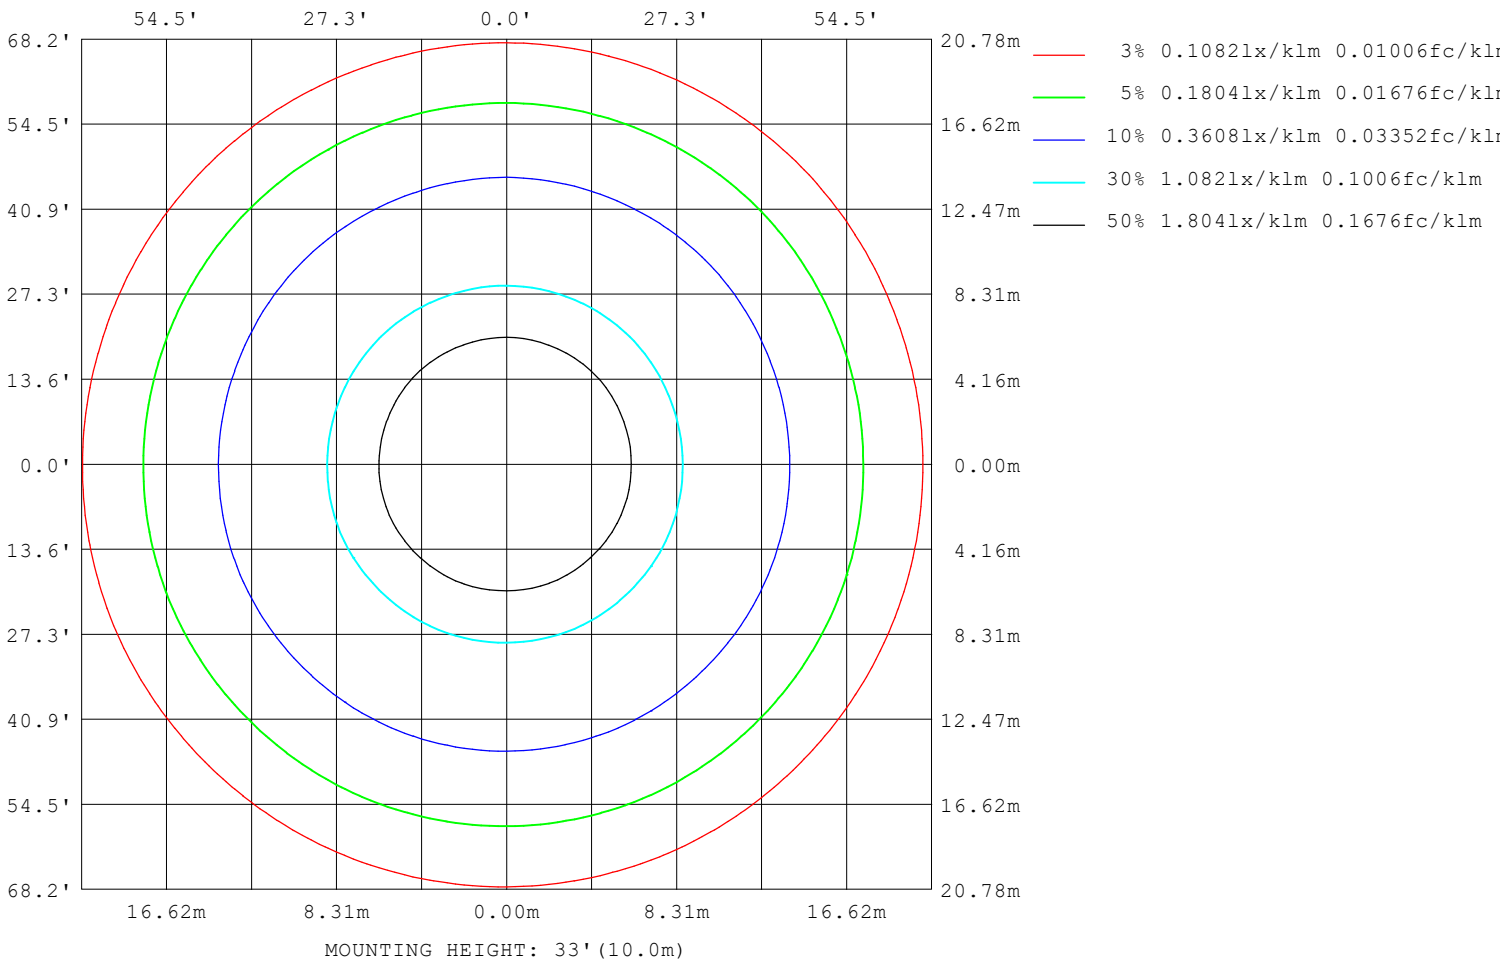

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1791
L_0~180 (75) av	1479
L_0~180 (85) av	330
L_90~270 (65) av	1818
L_90~270 (75) av	1637
L_90~270 (85) av	1280
L_45 (65) av	1805
L_45 (75) av	1567
L_45 (85) av	570

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

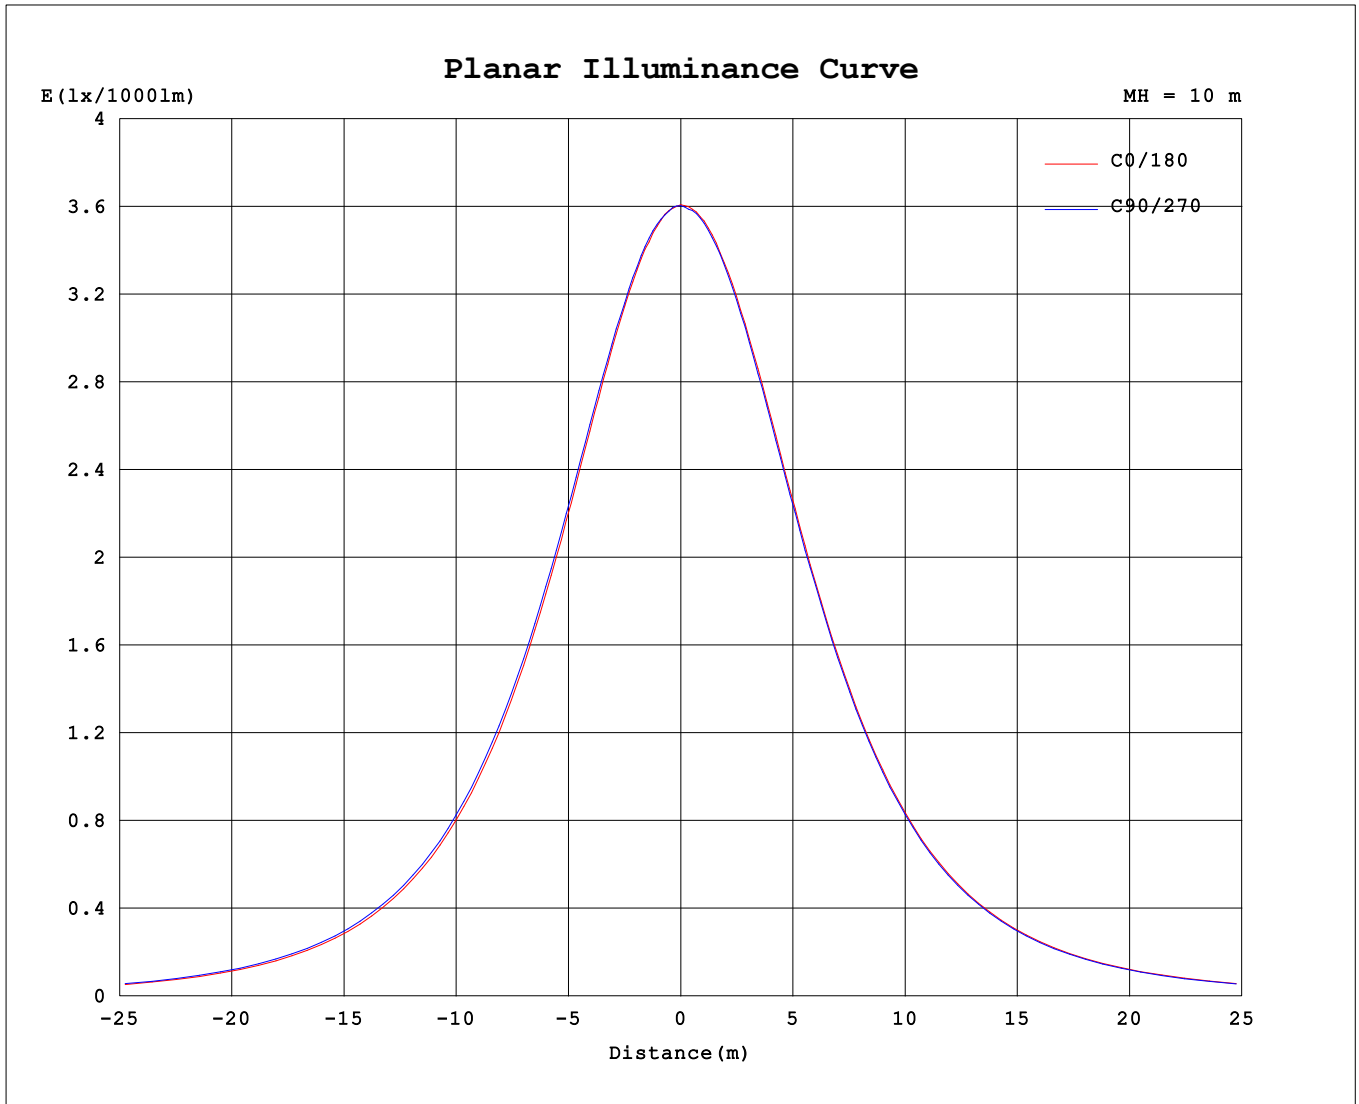

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.87V I:0.0717A P:8.3018W PF:0.9663 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:680.961x1 lm		
NAME: RF-LED-4-S9W-5CCTWH-PL	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd/klm

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	361	360	360	361	360	360	360	361	361	360	360	361	360	360	360	361			
5	358	358	358	359	358	359	358	360	359	360	359	359	359	358	358	357			
10	352	352	352	353	353	354	354	355	355	355	354	354	354	353	353	351			
15	342	343	343	344	344	346	346	347	347	346	346	345	345	344	344	342			
20	329	330	330	333	333	334	334	336	336	335	335	333	334	332	331	329			
25	314	315	315	318	318	320	319	321	321	319	320	318	319	317	316	314			
30	295	297	297	299	300	302	302	303	303	302	302	301	301	299	298	295			
35	274	276	277	279	280	281	282	284	283	281	282	281	281	278	278	275			
40	252	253	254	257	258	259	259	261	260	259	260	258	258	256	255	252			
45	227	229	230	233	234	235	235	237	237	235	236	234	234	232	231	227			
50	202	203	204	207	208	210	210	211	211	209	210	208	208	206	205	202			
55	175	176	178	181	181	183	183	184	184	182	183	181	182	179	178	175			
60	147	149	150	153	154	155	156	157	156	155	155	154	153	152	150	147			
65	119	121	122	125	126	127	127	128	128	127	126	125	125	123	122	119			
70	89.2	91.3	93.8	96.5	97.5	98.5	98.9	99.2	97.8	97.3	97.6	96.6	96.3	95.0	93.1	89.7			
75	58.2	60.6	64.3	68.8	69.9	70.8	69.4	68.7	66.7	66.5	67.9	68.8	68.4	67.1	63.1	58.8			
80	28.2	30.8	35.0	40.8	43.5	42.9	39.8	38.2	36.0	35.9	38.2	40.6	41.9	38.7	33.6	28.7			
85	2.17	3.69	7.31	13.8	19.0	15.5	10.8	8.90	7.20	6.79	8.69	13.0	17.4	11.7	5.61	1.92			
90	0.36	0.37	0.39	0.42	0.43	0.42	0.38	0.37	0.20	0.21	0.23	0.27	0.27	0.28	0.24	0.23			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-06-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: