


# BLD-HM15D-YYY

## Emergency Driver 100-347V 15W

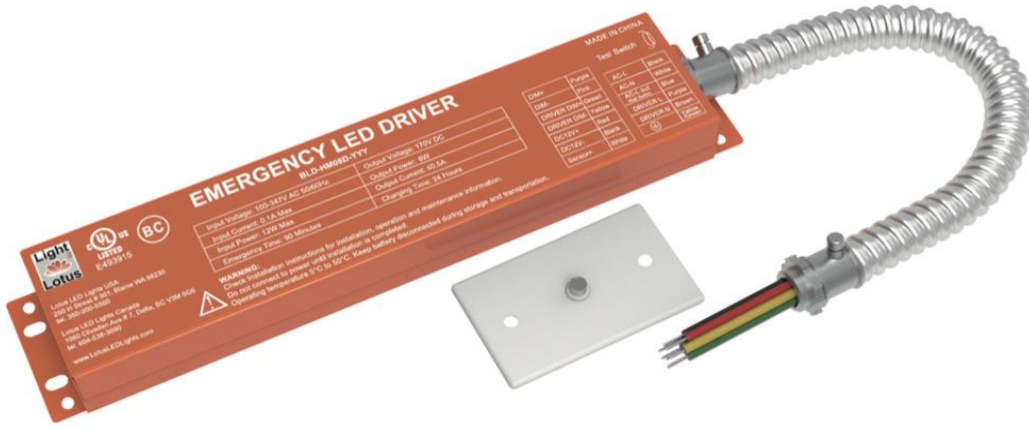

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

### DESCRIPTION


100-347V Input Emergency Driver 0-10V Dimmable for maximum 15W output.

Compatible with maximum 100W 0-10V Dimmable, or with maximum 15W non-dimmable fixtures.

### ORDERING GUIDE

model # **BLD-HM15D-YYY**

### FULL WIRING INSTRUCTIONS

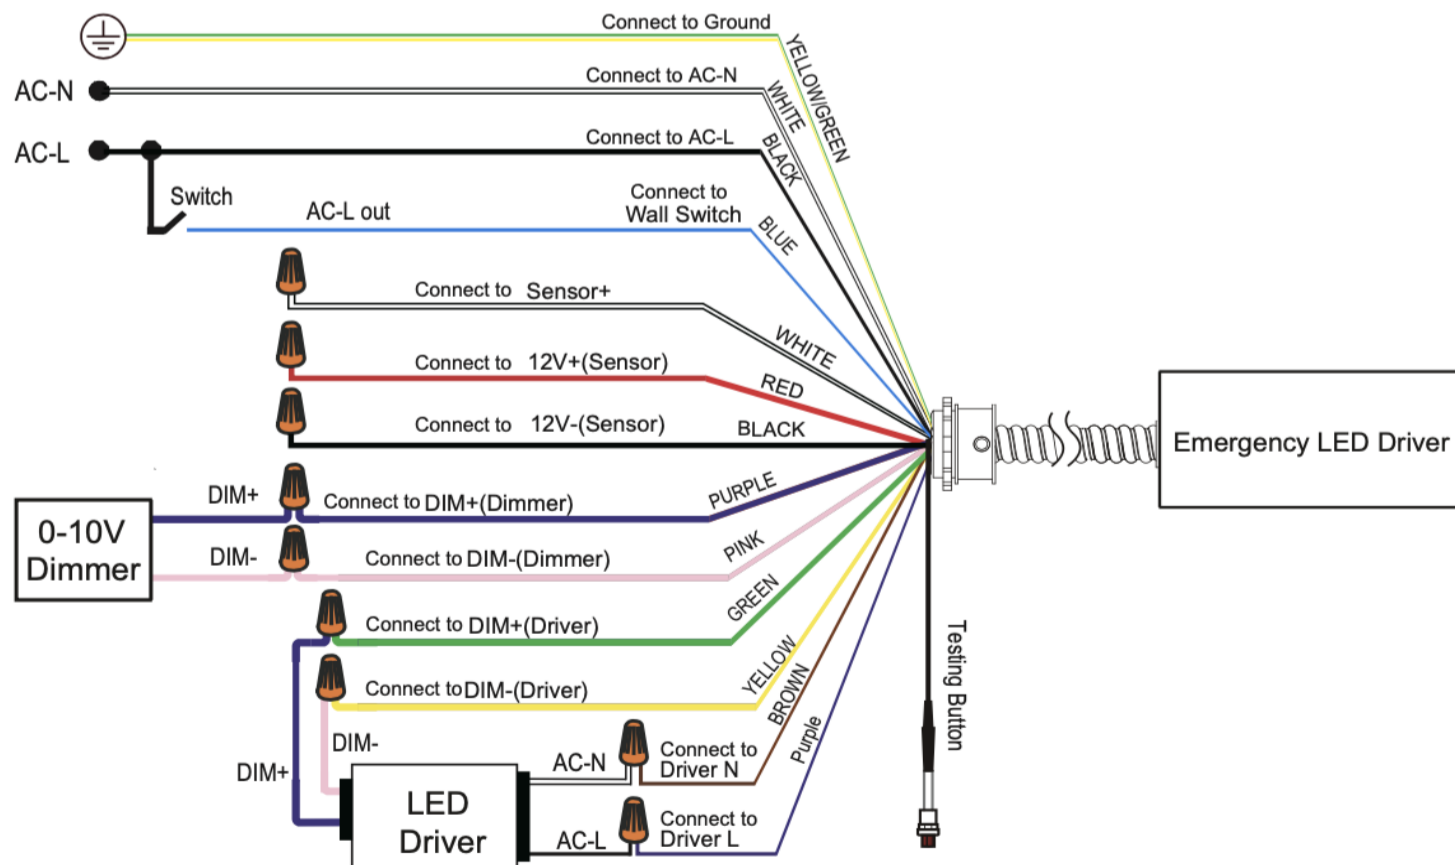

### SPECIFICATIONS

INPUT VOLTAGE	100-347V AC, 50/60 Hz
INPUT CURRENT	0.1A max
INPUT POWER	12W max
OUTPUT VOLTAGE	170V DC
OUTPUT POWER	15W
COMPATIBILITY	≤ 100W 0-10V DIMMABLE FIXTURES
	≤ 15W NON DIMMABLE FIXTURES
AMBIENT TEMPERATURE	40°F (5°C) to 120°F (50°C)
APPROVED LOCATIONS	DRY & DAMP
WARRANTY	3 YEAR
CERTIFICATION	c UL us