

Wet Location




DESCRIPTION

6" Surface Mount Backlit LED Disk
AC Input - No Driver Needed

FEATURES & BENEFITS

Fast & Easy to Install in J-Box - Save on Labor
Wet Location - Suitable For Showers & Soffits
CRI 90+ for True Color Rendering
Dimmable Down to 10% Flicker Free

DIMENSIONS OD 7 3/8" Thickness 1"

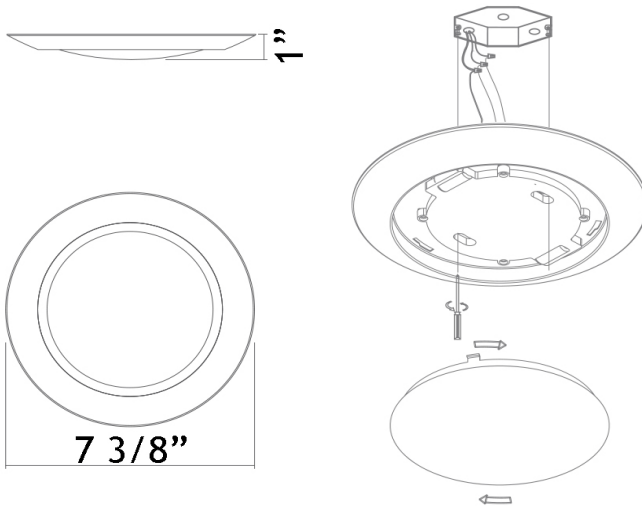

Project: _____

Location: _____

Trim: _____

Qty: _____

Notes: _____

SPECIFICATION

SPECIFICATION	
Applications	Surface Mount
Energy Used	15 W
Color Temperature (K)	3000
Light Output (lm)	900
Halogen Equivalent	75 W
Beam Angle	120°
CRI	90 +
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Wet Locations
Air Tight	No
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year



ORDERING GUIDE

CSC3017-LED-15W	CCT	Trim
	- xK	xx

Stock model 30K White Trim: **CSC3017-LED-15W-3K-WH**

4000K & 5000K and Black, Bronze & Brushed Nickel Trims Available by Custom Order