



DL254-6-30W-M-A5C5-HO

6" Round Commercial 5 CCT & 5 Wattage Selectable


DESCRIPTION

All in one 0-10 V dimmable 6" LED downlight for retrofit & new construction. Perfect for hospitality, healthcare, shopping mall & retail, office, exterior soffit, etc.

FEATURES & BENEFITS

- Universal voltage 120-347 V
- 0-10 V Dimmable 5%-100%
- 5 CCT selectable 2700 - 3000 - 3500 - 4000 - 5000 K
- 5 Wattage Adjustable 12 - 16 - 22 - 26 - 30 W
- Type IC, Wet location & Air-tight
- Regressed optics with low glare
- White Trim with White or Silver (Alzak) reflector in stock

DIMENSIONS ID 6" OD 8 1/4" Depth 4 3/4" Regressed 2"
Cut Out 6" to 7" Ceiling Space needed 4 3/4"

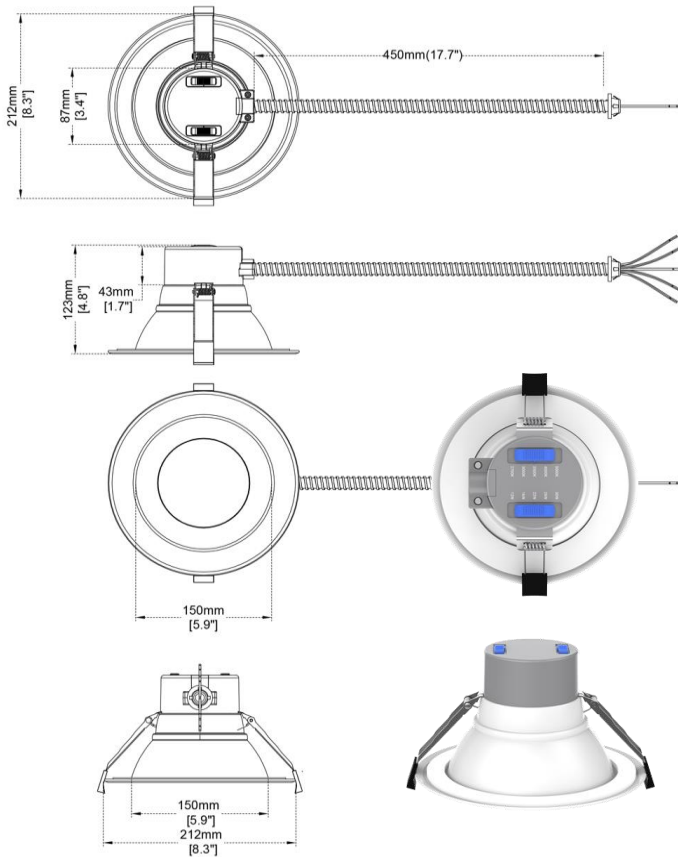

ORDERING GUIDE

- DL254-6-30W-M-A5C5-HO** [White Trim White Reflector](#)
- DL254-6-30W-M-A5C5-HO-AZ** [White Trims Silver Reflector \(Alzak\)](#)

Project: _____

Location: _____

Model: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Commercial Recessed Ceiling
Power Levels (W)	CCT / W 12 16 22 26 30
Light Output (lm)	2700K 1310 1760 2300 2750 3010
	3000K 1350 1820 2390 2760 3200
	3500K 1420 1920 2530 2920 3390
	4000K 1460 1970 2580 2970 3410
	5000K 1510 2020 2650 3030 3450
Color Temperature (K)	5CCT user selectable: 2700-3000-3500-4000-5000 K
Beam Angle	85°
CRI	80
Input	120V-347V AC 50/60 Hz
Dimming	0 - 10V
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year

Trim Options - Matte White and Alzak in stock, other trims available by custom order




[White Trim White Reflector](#)



[White Trims Silver Reflector \(Alzak\)](#)

ACCESSORIES - Sold Separately. Please note that junction box is not included

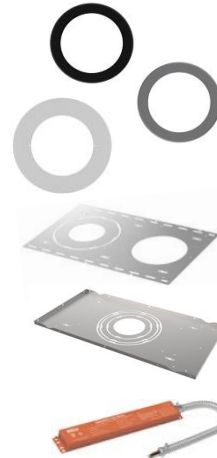

- Black trim cover model # **LBL-6CRT-B**
- Silver trim cover model # **LBL-6CRT-S**
- Goof Ring White OD 10 1/2" model # **LBL-6CGR-W**
- New Construction Mounting Plate for Stud Ceiling model # [LBL-MP-C4-8-STUD](#)
- New Construction Mounting Plate for T-bar Ceiling model # [LBL-MP-C4-10-TBAR](#)
- Emergency Driver 8W 120-347V input model # [BLD-HM08D-YYY](#)

COMPLIANCE



Type IC & Air-Tight
Wet Location

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON