

**JXL-COB04-R15W-5CCT****4" Round Recessed Economy LED 15W 5CCT****DESCRIPTION**

4" Round Recessed Economy LED With Integral Driver In Connection Box

Available with White &amp; Black trims and Smooth &amp; Baffle Reflectors

**FEATURES & BENEFITS**

5 CCT User Selectable

CRI 90+ for True Color Rendering

Type IC Rated - No Housing Required

Fast &amp; Easy To Install - Save On Labor

3" Deep - Install Where Ceiling Space Is Limited

120V Triac Dimmable Driver with Wiring Compartment Included

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model: \_\_\_\_\_

Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

**SPECIFICATION**

| Applications                   | Residential Recessed               |      |      |      |      |
|--------------------------------|------------------------------------|------|------|------|------|
| Power                          | 15 W                               |      |      |      |      |
| Color Temperature (K)          | 2700                               | 3000 | 3500 | 4000 | 5000 |
| Light Output WH Reflector (lm) | 1180                               | 1300 | 1380 | 1420 | 1380 |
| Light Output BK Reflector (lm) | 1170                               | 1270 | 1350 | 1380 | 1340 |
| Beam Angle                     | 36°                                |      |      |      |      |
| CRI                            | 90 +                               |      |      |      |      |
| Driver Input                   | 120V AC 50/60 Hz                   |      |      |      |      |
| J-Box Volume                   | 7.4 in <sup>3</sup>                |      |      |      |      |
| Dimming                        | TRIAC Dimmers 20% - 100%           |      |      |      |      |
| Approved Location              | Insulated Ceiling & Damp Locations |      |      |      |      |
| Air Tight                      | Yes                                |      |      |      |      |
| Ambient Temperature            | -4°F (-20°C) to +104°F (+40°C)     |      |      |      |      |
| Projected Life                 | 70% Light Output at 30,000 Hours   |      |      |      |      |
| Certification                  | c ETL us                           |      |      |      |      |
| Warranty                       | 3 Year                             |      |      |      |      |

**TRIM & REFLECTOR OPTIONS****4RR-SM-WH**

Smooth White

**4RR-BF-WH**

Baffle White

**4RR-SM-BK**


Smooth Black

**4RR-BF-BK**


Baffle Black

**DIMENSIONS**

Fixture: OD 4 3/4" ID 3 1/2" Depth 3"

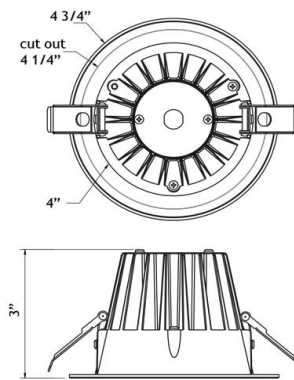

Cut Out 4 1/4"

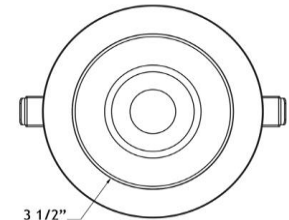

Driver Dimensions

3 1/2" x 3 1/2" x 1 1/4"

**ACCESSORIES**

Sold Separately

[26" Long Flat Rough-In Plate model # RIP4](#)[13" Long Flat Rough-In Plate model # MP4-2](#)[13" Long Flanged Rough-In Plate model # MP4](#)[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)[Jumper Cable 10 ft model # JC-5CCT-10](#)

Goof Ring OD 5 3/4"

[White model # GR4 Black model # GR4-BK](#)**ORDERING GUIDE**

|                                  | Trim  | Reflector                    |
|----------------------------------|-------|------------------------------|
| JXL-COB04-R15W-5CCT-WH-4RR-SM-WH | White | <a href="#">Smooth White</a> |
| JXL-COB04-R15W-5CCT-WH-4RR-BF-WH | White | <a href="#">Baffle White</a> |
| JXL-COB04-R15W-5CCT-WH-4RR-SM-BK | White | <a href="#">Smooth Black</a> |
| JXL-COB04-R15W-5CCT-WH-4RR-BF-BK | White | <a href="#">Baffle Black</a> |
| JXL-COB04-R15W-5CCT-BK-4RR-SM-WH | Black | <a href="#">Smooth White</a> |
| JXL-COB04-R15W-5CCT-BK-4RR-BF-WH | Black | <a href="#">Baffle White</a> |
| JXL-COB04-R15W-5CCT-BK-4RR-SM-BK | Black | <a href="#">Smooth Black</a> |
| JXL-COB04-R15W-5CCT-BK-4RR-BF-BK | Black | <a href="#">Baffle Black</a> |

**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Hainesport NJ, Naples FL, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses

warehouses

**Lotus LED Lights CANADA**

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090

Delta BC &amp; Mississauga ON