



LBL-DC24V96W

24V Class 2 Power Supply 96W Dimmable



Project: _____

Location: _____

Qty: _____

Notes: _____

DESCRIPTION


24V Class 2 Power Supply 96W
 For Residential Applications at 80% Load

FEATURES & BENEFITS

- 3/4" Deep - Fits Where Space Is Limited
- Triac and 0-10V Dimmable
- Wet Location Certified

WIRING DIAGRAM

The below diagram shows both Triac and 0-10V options and if for information purpose only.
 Always use the wiring diagram of dimmer manufacturer.
 Do not connect other light fixtures in the same circuit.

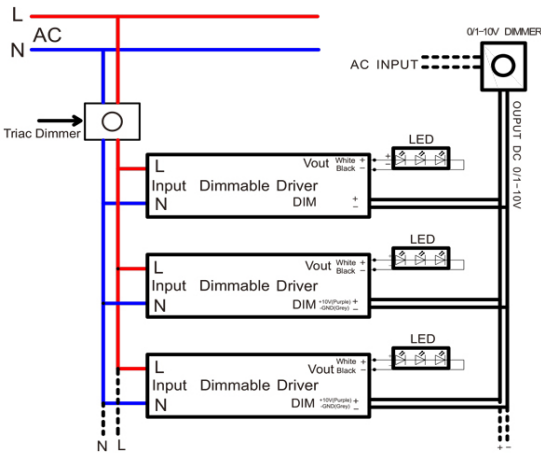

SPECIFICATION

Applications	LED Tape, 24V Ceiling Fixtures
Power	96 W
Input	120V
Output	24V DC
Dimmability	Triac & 0-10V down to 20%
Approved Location	Wet Locations
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Warranty	3 Year
Certification	cULus Listed File # 498189

ORDERING GUIDE


LBL-DC24V96W

COMPLIANCE



DIMENSIONS:

8" x 2 1/2" x 3/4"

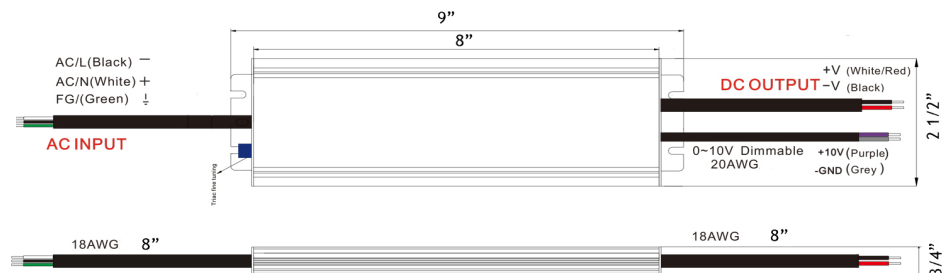

WARNING:

Ambient operating temperature is -40°F (-40°C) to +104°F (+40°C). Please mount in a shaded area or when mounted indoors install in a well-ventilated area. Failure to follow these instructions could lead to overheating, short life and void the warranty.

Lotus LED Lights USA

www.LotusLEDLights.com

Lotus LED Lights CANADA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
 Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090
 Delta BC & Mississauga ON