



Type IC, Wet, Air-Tight & Open Plenum

DESCRIPTION


8" Round Deep Regressed LED - Elegant Design Without Glare
Commercial Grade Quality Built To Last

FEATURES & BENEFITS

18W & 30W High Output versions with CRI 90+
Type IC, Air-Tight & Wet - No Housing Required
4 1/2" Deep - Install Where Ceiling Space Is Limited
Armored Cable & Metal Connectors - Open Plenum Rated
Driver Inside Connection Box with Romex Quick Connectors
and Knock Outs - Fast Installation & No Junction Box Needed

DIMENSIONS ID 7 1/2" OD 9" Cut Out 7 1/2" to 8"

Ceiling Clearance Required: 4"

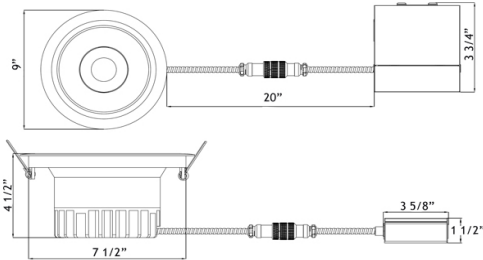

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as

18W: Cat # LLL-LD2050TR
30W: Cat # LLL-LD3580TR

ORDERING GUIDE:

Example 18W **LD8R-30K-WR-WT**

Example 30W **LD8R-30K-HO-WR-WT**

	CCT	30W only	Reflector-Trim
LD8R	- xxK	- HO	- xx-xx
3000K	- 30K		WR-WT
3500K	- 35K		SR-WT
4000K	- 40K		BR-BT
5000K	- 50K		SR-BT
DTW 3K-2K	- 32K		

8" Round Deep Regressed LED 18W / 30W Open Plenum

Project: _____


Location: _____




Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling Mount
Energy Used	15W Regular / 18W High Output
Color Temperature (K)	3000 3500 4000 5000 DTW 3-2
Light Output 18W (lm)	1550 1600 1650 1700 1150
Light Output 30W (lm)	2700 2900
Beam Angle	38°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year Residential / 5 Year Commercial

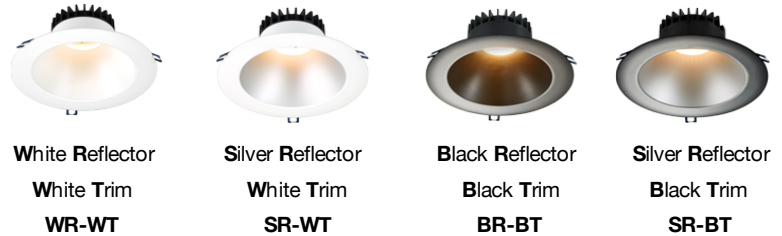AVAILABLE TRIMS



ACCESSORIES	Sold Separately
	Armored Low Voltage Extension 10ft cat # MEC10
	Flat Rough-In Plates - cat # RIP8
	Goof Ring White OD 9 1/2" cat # GR8 Goof Ring White OD 10 1/2" cat # GR810

COMPLIANCE



Type IC
Air - Tight
Open Plenum