



# LED-2-S11W-EY-T

## 2" Trimless Round Gimbal LED 11W



### DESCRIPTION


2" Trimless Round Gimbal Recessed LED  
With Integral Driver In Connection Box

### FEATURES & BENEFITS

- Up to **20° tilt** for slopped ceilings and wall washing
- 5CCT** user selectable 2700-3000-3500-4000-5000K or **Dim to Warm** 3000-1800K
- Light output up to **1000 lm**
- CRI 90+** for True Color Rendering
- 5" Deep** - Install Where Ceiling Space Is Limited
- Type IC Rated** - No Housing Required
- Wet Location** Approved
- Driver Inside Connection Box** - No Junction Box Needed
- 120V Triac** Dimmable or **120-347V 0-10V** Dimmable Drivers

**DIMENSIONS:** D 2 1/2" ; OD 3 1/2" : Cut Out 2 5/8"

Ceiling Clearance Required: 5" 120V Triac Dim Driver Included

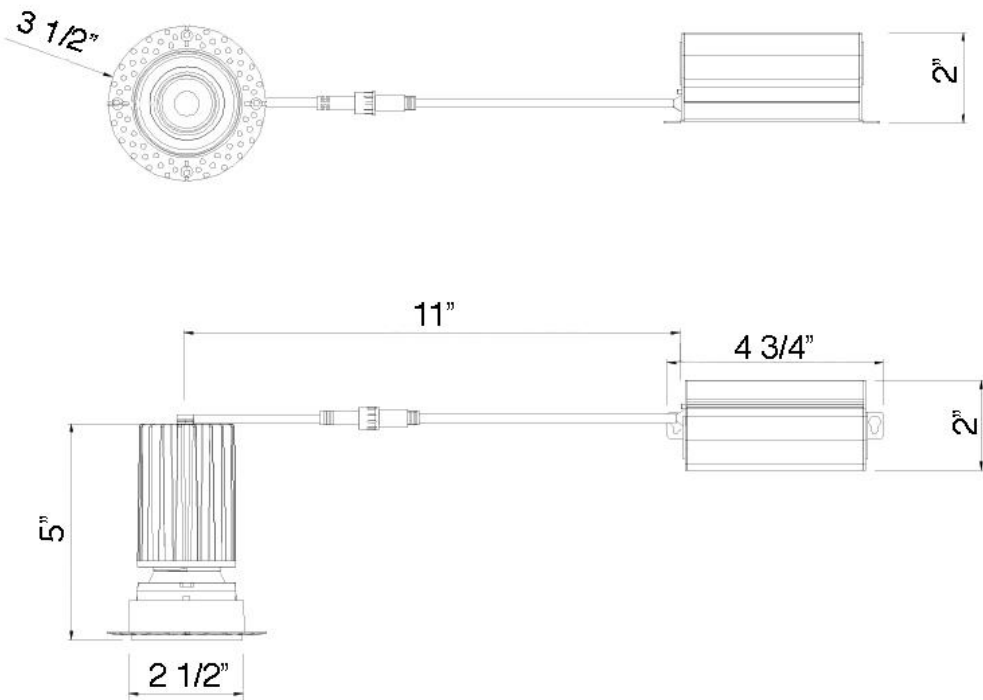

Project:

Location:

Model:

Qty:

Notes:

| SPECIFICATION                   |  |
|---------------------------------|--|
| Applications                    | Sloped Ceilings, Wallwashing, Highlighting Artwork |
| Power                           | 11 W   |
| Color Temperature (K)           | 2700K - 3000K - 3500K - 4000K - 5000K - DTW 30-18K |
| Light Output White Trim (lm)    | 800 - 850 - 930 - 980 - 1000 - 900                 |
| Halogen Equivalent              | 90 W   |
| Beam Angle                      | 38° (standard), 24° & 60° available as adder       |
| Tilt Angle                      | 20°  |
| CRI                             | 90 +   |
| Default Driver Input & Dimming  | 120V AC 50/60 Hz - Triac Dimmable                  |
| Optional Driver Input & Dimming | 120V-347V AC 50/60 Hz - 0-10V Dimmable             |
| J-Box Volume                    | 6.53 in <sup>3</sup> / 2 in 2 out 12AWG            |
| Approved Location               | Insulated Ceiling & Wet Locations                  |
| Air Tight                       | Yes  |
| Ambient Temperature             | -4°F (-20°C) to +104°F (+40°C)                     |
| Projected Life                  | 70% Light Output at 50,000 Hours                   |
| Certification                   | cETLus   |
| Warranty                        | 5 Year   |

### AVAILABLE TRIMS



White

Black

### ORDERING GUIDE


|                                | CCT         | Trim                  | Beam Angle           |
|--------------------------------|-------------|-----------------------|----------------------|
| <b>LED-2-S11W-5CCT-WH-EY-T</b> | 5CCT        | <a href="#">White</a> | blank for <b>38°</b> |
| <b>LED-2-S11W-DTW-WH-EY-T</b>  | Dim to Warm | <a href="#">White</a> | <b>-24D</b> for 24°  |
| <b>LED-2-S11W-5CCT-BK-EY-T</b> | 5CCT        | <a href="#">Black</a> | <b>-60D</b> for 60°  |
| <b>LED-2-S11W-DTW-BK-EY-T</b>  | Dim to Warm | <a href="#">Black</a> |                      |

Default beam angle is 38°, Optional 24° & 60°



### ACCESSORIES

Sold Separately

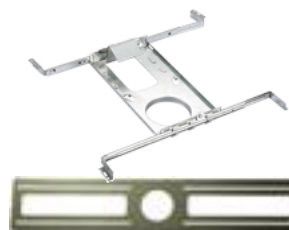

[Flanged Mounting Plate with bars model FRP212](#)

[Flat Mounting Plate model RIP212](#)



[Jumper Cables 10 ft 5CCT model JC-5CCT-10](#)

[Jumper Cables 10 ft DTW model JC-10](#)



[0-10V Driver 120-347V for 5CCT HBL012-AW-10-01A-5CS](#)  
[0-10V Driver 120-347V for DTW HBL012-AW-10-01L](#)

### Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
warehouses

### Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090  
Delta BC & Mississauga ON