

Type IC & Air-Tight



**DESCRIPTION**


6" Round Recessed LED With Integral Driver In Connection Box  
Single Color or 5 CCT

**FEATURES & BENEFITS**

- 1/2" Thick - Install Directly Under Ceiling Joists
- Type IC Rated - No Housing Required
- Driver Inside Connection Box - No Junction Box Needed
- 5 CCT Switchable Option - User Selectable Light Colors

**DIMENSIONS** ID 6" OD 6 7/8" Cut Out 6 1/8"

Fixture Thickness: 1/2"  
120V Triac Dimmable Driver Included

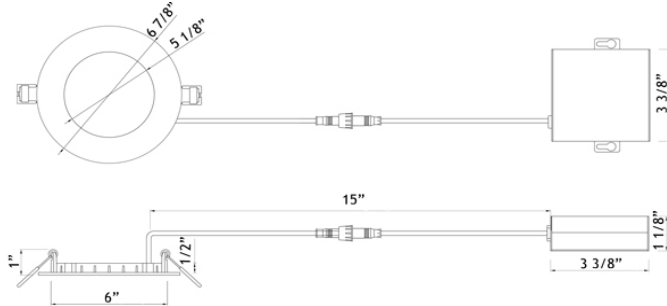

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Renovations & New Construction
Energy Used	12 W
Color Temperature (K)	3000   4000   5 CCT
Light Output (lm)	800   820   800
Halogen Equivalent	75 W
Beam Angle	120°
CRI	80
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4° F (-20° C) to +104° F (+40° C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

**5 CCT Option**



5 Light Colors  
User Selectable  
2700K | 3000K | 3500K  
4000K | 5000K

**ORDERING GUIDE** Example **LED-6-S12W-3K-WH**

LED-6-S12W	CCT	Trim
	- xK	- WH
3000K	3K	- WH
4000K	4K	- WH
5 CCT	5CCT	- WH

Stock trim - White  
Other Trim Colors Available By Custom Order

**ACCESSORIES**

Sold Separately

- 13" Mounting Plate Flat cat # **MP6-2**
- 26" Flat Rough-In Plates - cat # **RIP6**
- Flanged Plate with Hanger Bars - cat # **FRP6**
- Jumper Cable 10 ft. Maximum Extension 40 ft  
For single light color - cat # **JC-10**  
For 5CCT version - cat # **JC-5CCT-10**
- Goof Ring White OD 7 5/8" cat # **GR6**