



# LL2G24V

## 2" 24V Eyeball Round Recessed Gimbal LED 5W



### Type IC, Wet & Air-Tight

#### DESCRIPTION

2" 24V DC Input Eyeball Round Recessed Gimbal LED With DC Module For Regulating The Voltage & Current Unique & Patented Design: Gimbal Yet Air-Tight Without Housing Needed


#### FEATURES & BENEFITS

1 1/2" Deep - Install Where Ceiling Space Is Limited  
 Type IC Rated - No Housing Required  
 Fast & Easy To Install - Save On Labor  
 Directional Beam - Great for Sloped Ceilings and Artwork  
 CRI 90+ for True Color Rendering

#### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips  
 Ceiling Clearance Required: 1 1/2"

**DIMENSIONS:** ID 2" OD 2 1/2" Cut Out 2" to 2 1/8"

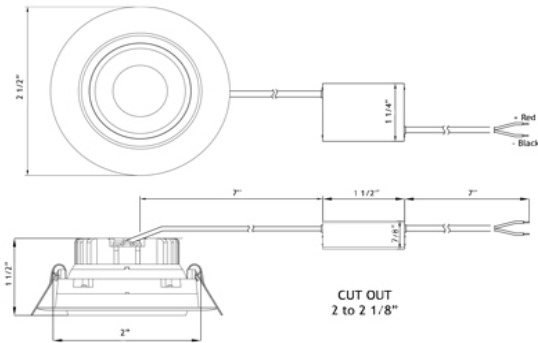

DC Module Included



**ORDERING GUIDE** Example: **LL2G24V - 30K - WH**  
 CCT

|                |            |             |            |
|----------------|------------|-------------|------------|
| <b>LL2G24V</b> | -          |             |            |
| 2700K          | <b>27K</b> | - <b>WH</b> | White Trim |
| 3000K          | <b>30K</b> |             |            |
| 4100K          | <b>41K</b> |             |            |

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

| SPECIFICATION       |   |
|---------------------|---|
| Applications        | Cabinets, Recessed Alcoves                                  |
| Energy Used         | 5 W   |
| Color Temperature   | 2700   3000   4100  |
| Light Output        | 380   400   430   |
| Halogen Equivalent  | 35 W  |
| Beam Angle          | 24° Beam with 30° tilt and 360° rotation                    |
| CRI                 | 90 +  |
| Input               | 24V DC  |
| Dimming             | Not Dimmable  |
| Approved Location   | Insulated Ceiling & Wet Locations                           |
| IP Rating           | IP 54   |
| Air Tight           | Yes   |
| Ambient Temperature | -40°F (-40°C) to +104°F (+40°C)                             |
| Projected Life      | 70% Light Output at 50,000 Hours                            |
| Certification       | cULus   |
| Warranty            | 10 Year on Residential<br>5 Year on Commercial Applications |

#### AVAILABLE TRIMS



White

#### ACCESSORIES

Sold Separately



Rough-In Plates - cat # **RIP2**

#### COMPLIANCE



**Type IC  
Air-Tight**

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954