

## 3" Gimbal Round Recessed LED 7.5W Soft White

### Type IC & Air-Tight



#### DESCRIPTION


Recessed 3" Gimbal Round LED With Integral Driver In Connection Box.  
Fits Where No Other Recessed Fixture Can.  
**Unique Design: Gimbal Yet Air-Tight Without Housing Needed.**

#### FEATURES & BENEFITS

**1 3/4" Thin** - Install Where Ceiling Space Is Limited.  
**Type IC Rated** - No Housing Required  
**Fast & Easy To Install** - Save On Labour  
**Driver Inside Connection Box** - No Junction Box Needed  
**Directional Beam** - Great for Sloped Ceilings and Highlighting Artwork  
**CRI 94** - True Colour Rendering

#### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips.  
Ceiling Clearance Required: 2 1/2" for Romex, 3 1/2" for MC or BX installations

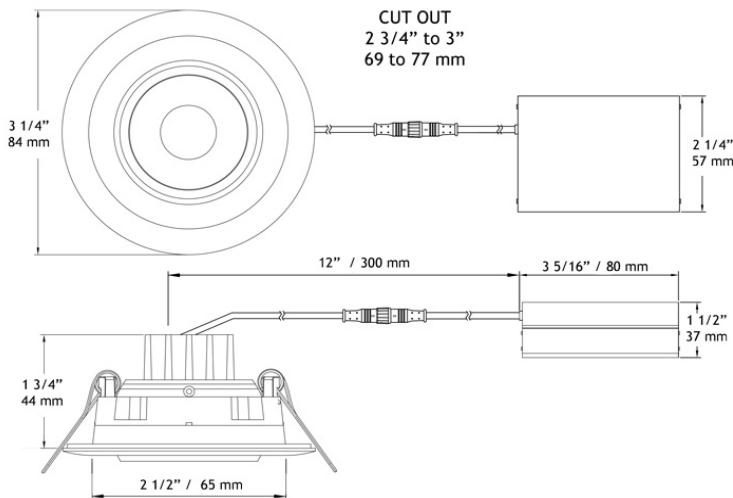

#### COMPLIANCE



White

Brushed Nickel

Black

#### Warehouses

Vancouver

Toronto

Las Vegas

Naples

Philadelphia

Dallas

Seattle

tel: 1-844-24-LOTUS (56887)

fax: 1-877-561-6306

www.lotusLEDlights.com

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Trim Finish: \_\_\_\_\_

Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Sloped Ceilings, Highlighting Artwork
Energy Used	7.5 W
Colour Temperature	3000 K
Light Output	600 lm
Halogen Equivalent	50 W
Beam Angle	38° Beam with 20° tilt and 360° rotation
CRI	94
Driver Input	120V AC or 277V-347V AC 50/60 Hz
Power Factor	0.98
Dimming	TRIAC Dimmers 5% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-40° F (-40° C) to +104° F (+40° C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star, T24
<b>Warranty</b>	<b>10 Year on Residential</b> <b>5 Year on Commercial Applications</b>

Driver Included



Available Trims:

**CHARACTERISTICS**

**Unique Design:** Gimbal with 20° tilt and 360° rotation,  
 Yet Air-Tight Without Housing Needed. Patent Pending.  
**Body:** Durable, Die Cast Aluminum Alloy for Optimal Heat Dissipation.  
**Paint:** Oil Based Spray Painted - Scratch Resistant And Smooth Finish.  
**LED:** Epistar COB Custom Packaged by Hongli Tronic with LM80.  
 Guaranteed 98% Lumen Maintenance After 6,000 Hours.  
 Strict Binning To Ensure Consistent Light Colour. CRI 93 for True and Colour Rendering.  
**Driver:** 4th Generation Lotus Designed. Field Proven Since 2011.  
**Connection Box:** Patented Invention By Lotus LED Lights.  
 Saves Contractors Labour On Installation.  
**Testing:** Every Single Driver Is Powered For Minimum 24 Hours Together With The  
 Fixture That It Is Shipped With. No Random Tests - We Hand Test Every Fixture & Driver.

**LED lighting facts**  
 A Program of the U.S. DOE

Light Output (Lumens)	600
Watts	7.5
Lumens per Watt (Efficacy)	80
Color Accuracy Color Rendering Index (CRI)	93
Light Color Correlated Color Temperature (CCT)	3000 (Bright White)

Color temperature scale: 2700K (Warm White), 3000K (Bright White), 4500K (Daylight), 6500K.



All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: K53C-1XMB2 (9/21/2016)  
 Model Number: LL3G-30K  
 Type: Luminaire - Downlight

**PHOTOMETRIC DATA**

MODEL:	LL3G-30K	LAMP FLUX:	613 LM
VOLTAGE:	120 V	LUMENS / POWER:	82 LM/W
POWER:	7.4 W	CENTRAL INTENSITY:	1022 CD
PF:	0.989	BEAM ANGLE:	47 DEGREES

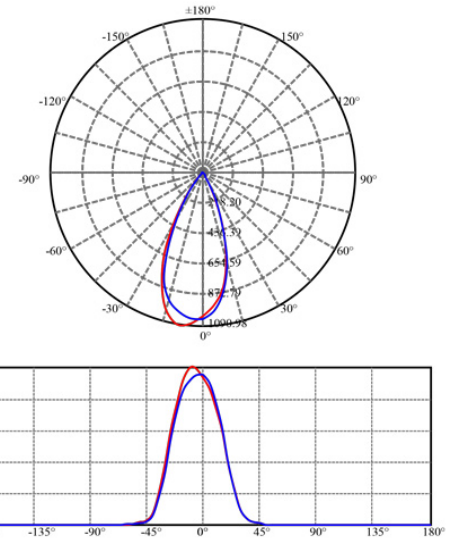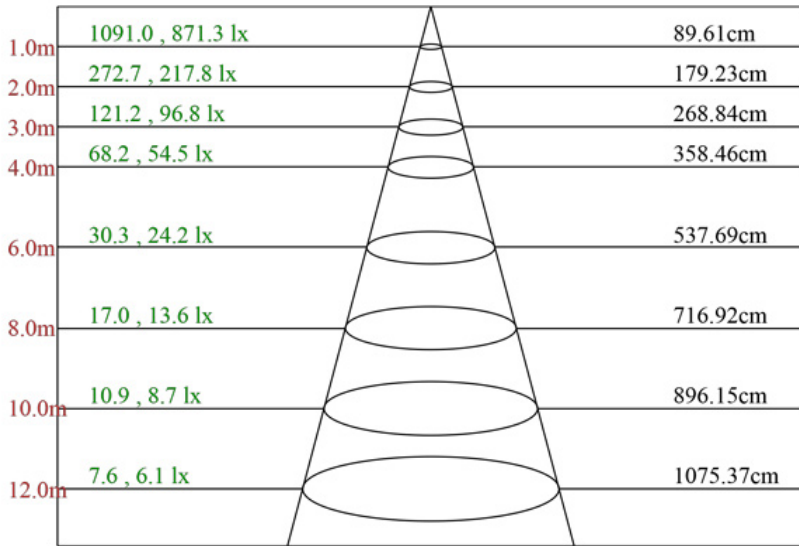

Max , Ave Beam angle of C180plane47.90

**ORDERING GUIDE**

Example: LL3G - 30K - WH

LL3G - 30K -  Trim Finish  
 WH : White  
 BK : Black  
 BN : Brushed Nickel

Order 277V - 347V Optional Driver Separately As cat # LLL-LD0716H



**ACCESSORIES**

Sold Separately



Low Volage Extension Cables  
 6ft - cat # EXC6, 20ft - cat # EXC20  
 Max 40 ft Extension Allowed



Rough-In Plates - cat # RIP3



Goof Ring White OD 4 1/2" - cat # GR3



**Warehouses**  
 Vancouver Toronto Las Vegas Naples Philadelphia Dallas Seattle

tel: 1-844-24-LOTUS (56887)

fax: 1-877-561-6306

[www.lotusLEDlights.com](http://www.lotusLEDlights.com)