



**LL4R**

**4" Round Ultimate Super Thin Recessed LED 13.5W**



**Type IC, Wet & Air-Tight**

**DESCRIPTION**

4" Round Recessed LED With Integral Driver In Connection Box  
Fits Where No Other Recessed Fixture Can


**FEATURES & BENEFITS**

- 1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
- Wider Trim - No Goof Rings Needed For Covering Old 4" Holes
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required
- CRI 90 + for True Color Rendering

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 2 1/2"

**DIMENSIONS :** ID 4 1/8" OD 5 1/4" Cut Out 4 1/4" to 4 1/2"

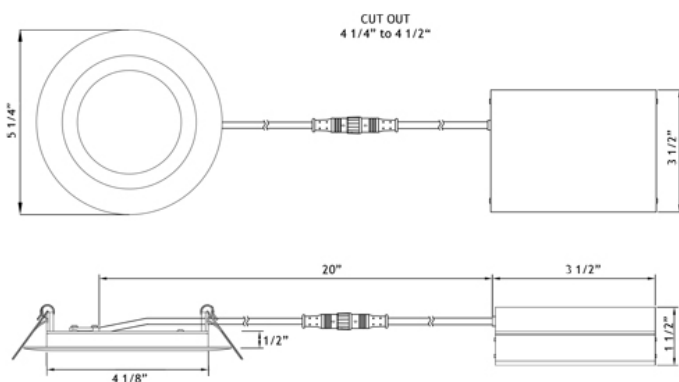

120V TRIAC Dimmable  
Driver Included



Optional 120V - 347V  
Driver 0-10V Dimmable



Order Separately as  
[model # LLL-LD1535T](#)

**ORDERING GUIDE**

Example: **LL4R - 30K - WH**

	CCT	Trim Finish	
<b>LL4R</b>	-	-	
2700K	<b>27K</b>	<b>WH</b>	<a href="#">White</a>
3000K	<b>30K</b>	<b>BK</b>	<a href="#">Black</a>
4000K	<b>40K</b>	<b>BN</b>	<a href="#">Brushed Nickel</a>
5000K	<b>50K</b>	<b>BC</b>	<a href="#">Brushed Copper</a>
DTW 28-20	<b>28K</b>	Dim to Warm 2800K to 2000K <b>WH</b> Trim Only	
DTW 35-20	<b>35K</b>	Dim to Warm 3500K to 2000K <b>WH</b> Trim Only	

Project:

Location:

Model #:


Qty:

Notes:

**SPECIFICATION**

SPECIFICATION	
Applications	Recessed Ceiling, Showers & Soffits
Energy Used	13.5 W
Colour Temperature	2700   3000   4000   5000   DTW 28-20   DTW 35-20
Light Output	750   760   800   850   750   760
Halogen Equivalent	75 W
Beam Angle	110°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling, Wet & Damp Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year Residential / 5 Year Commercial

**AVAILABLE TRIMS**

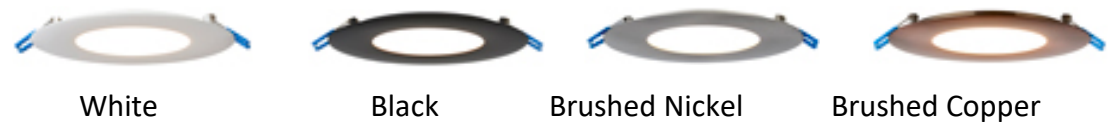

**ACCESSORIES**

Sold Separately



Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)

[20ft - model # EXC20](#)



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Flat Rough-In Plates model # RIP412](#)



[Flanged Plate with Hanger Bars model # FRP412](#)

**COMPLIANCE**



**Type IC  
Air-Tight  
Wet Location**

**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
warehouses

**Lotus LED Lights CANADA**

702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090  
Delta BC & Mississauga ON