



Type IC, Air-Tight, Wet & Plenum Rated

DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box
Commercial Grade Quality With Architectural Design


FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited
Single CCT 2700K, 3000K, 4000K, Dim to Warm or 5CCT options CRI 90+ for True Color Rendering
Type IC Rated - No Housing Required - Save on Labour
Driver Inside Connection Box - No Junction Box Needed
Armored Cable & Metal Connectors - Open Plenum Rated

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/4"

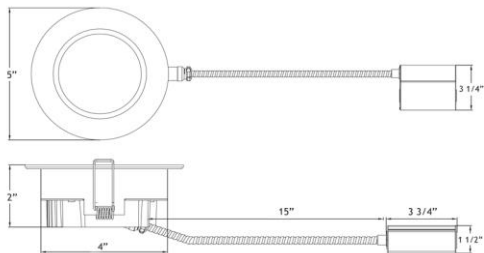

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as [model # LLL-LD1535TR](#)

ORDERING GUIDE Example: **LL4RR - 30K - WH**

	CCT	Trim Finish	
LL4RR	- xxK	- xx	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K		
DTW 30K-18K	3018K	Dim to Warm 3000K to 1800K	
5CCT	5CCT	User Selectable 27-30-35-40-50K	

LL4RR

4" Round Regressed Open Plenum LED 14.5W

Project: _____

Location: _____

Model #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling Mount
Power	14.5 W
Single CCT Models (K)	2700 3000 4000 Dim to Warm 3000-1800K
Light Output White Trim (lm)	950 1000 1020 850
5 CCT Models (K)	2700 3000 3500 4000 5000
Light Output White Trim (lm)	860 910 960 990 960
Halogen Equivalent	90 W
Beam Angle	90°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW & 5CCT)
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



White



Black

ACCESSORIES

Sold Separately



Armored Low Voltage Extension FT6 / CMP rated [10ft model # MEC10](#)



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Flat Rough-In Plates model # RIP4](#)



[Flanged Plate with Hanger Bars model # FRP4](#)

[Goof Ring OD 5 3/4" model # GR4](#)

COMPLIANCE



**Type IC
Air-Tight
Open Plenum**

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON