

4" Square Super Thin Recessed LED 13.5W

Type IC, Wet & Air-Tight
DESCRIPTION

4" Square Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 2 1/2"

DIMENSIONS: ID 4 1/8" OD 4 3/4" SQ Cut Out 4 1/8" to 4 1/4"

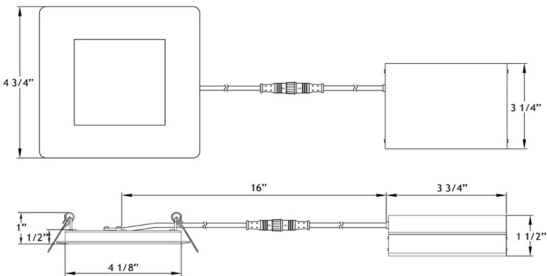

120V TRIAC Dimmable

Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



Order Separately as
Cat # **LLL-LD1535T**

AVAILABLE TRIMS


White



Black

ORDERING GUIDE Example: **LL4S - 30K - WH**

	CCT	Trim Finish	
LL4S	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K		

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling, Showers & Soffits
Energy Used	13.5 W
Colour Temperature	2700 3000 4000
Light Output	800 850 950
Halogen Equivalent	90 W
Beam Angle	110°
CRI	80
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling, Wet & Damp Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star
Warranty	10 Year Residential / 5 Year Commercial

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



26" Flat Rough-In Plates - cat # **RIP4**



13" Flat Rough-In Plate - cat # **MP4-2**



Flanged Plate with Hanger Bars - cat # **FRP4**

COMPLIANCE


**Type IC
Air-Tight**