

## 4" Square Regressed 1st Gen Plenum LED 14.5W



### Type IC, Air-Tight, Wet & Plenum

#### DESCRIPTION

4" Square Recessed LED With Built-In Driver  
Commercial Grade Quality With Architectural Design


#### FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited  
Type IC Rated - No Housing Required  
CRI 90+ for True Color Rendering  
Fast & Easy To Install - Save On Labor  
Connection Box Included - No Junction Box Needed  
Armored Cable - Open Plenum Rated

#### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2"

#### DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/4"

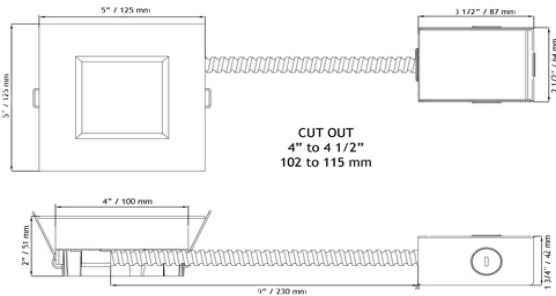

#### AVAILABLE TRIMS



White



Black

#### ORDERING GUIDE Example: LL4SRG - 30K - WH

LL4SRG	CCT	Trim Finish	
2700K	27K	WH	White
3000K	30K	BK	Black
4100K	41K		

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Recessed Ceiling Mount
Energy Used	14.5 W
Color Temperature	2700   3000   4100
Light Output	850   860   900
Halogen Equivalent	75 W
Beam Angle	90°
CRI	90 +
Input Voltage	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 5%-100%
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

#### ACCESSORIES

Sold Separately



26" Flat Rough-In Plates - cat # **RIP4**



13" Flat Rough-In Plate - cat # **MP4-2**



13" Flanged Rough-In Plate - cat # **MP4**



Flanged Plate with Hanger Bars - cat # **FRP4**

#### COMPLIANCE



Type IC  
Air-Tight  
Open Plenum