

6" Round Ultimate Super Thin Recessed LED 17W



Type IC, Wet & Air-Tight

DESCRIPTION

6" Round Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

- 1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
- Wider Trim - No Goof Rings Needed For Covering Old 6" Holes
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required
- CRI 90 + for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 1 1/2"

DIMENSIONS ID 6 1/8" OD 7 1/2" Cut Out 6 1/4" to 6 1/2"

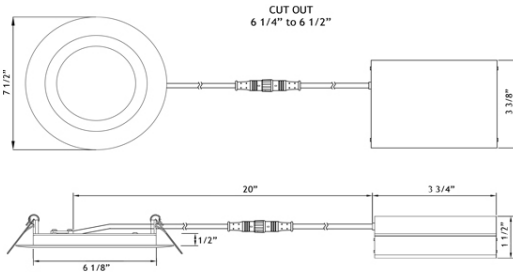


120V TRIAC Dimmable

Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



Order Separately as
Cat # **LLL-LD2050T**

ORDERING GUIDE

Example: **LL6R - 30K - WH**

	CCT	Trim Finish	
LL6R	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K	BN	Brushed Nickel
5000K	50K	BC	Brushed Copper
DTW 28-20	28K	Dim to Warm 2800K to 2000K WH Trim Only	
DTW 35-20	35K	Dim to Warm 3500K to 2000K WH Trim Only	

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling, Showers & Soffits
Energy Used	17 W
Colour Temperature	2700 3000 4000 5000 DTW 28-20 DTW 35-20
Light Output	950 980 1000 1050 950 980
Halogen Equivalent	100 W
Beam Angle	110°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	0.95
Power Factor	
Approved Location	Insulated Ceiling, Wet & Damp Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year on Residential

AVAILABLE TRIMS



White

Black

Brushed Nickel

Brushed Copper

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat # **RIP612**



Flanged Plate with Hanger Bars - cat # **FRP6**

COMPLIANCE



**Type IC
Air-Tight**