

Type IC, Air-Tight & Wet



DESCRIPTION

Recessed 8" Round LED With Integral Driver In Connection Box
Commercial Grade Quality

FEATURES & BENEFITS


- 2 1/4" Thin - Fits In Tight Ceiling Spaces
- Type IC Rated - No Housing Required
- Fast & Easy To Install - Save On Labour
- Driver Inside Connection Box - No Junction Box Needed
- Wet Location IP65 Approved

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips.
2 1/4" Above Ceiling Clearance Required. Quick connectors Included.

DIMENSIONS

ID 7 3/4" OD 9 1/2" Cut Out 8" to 8 1/2"

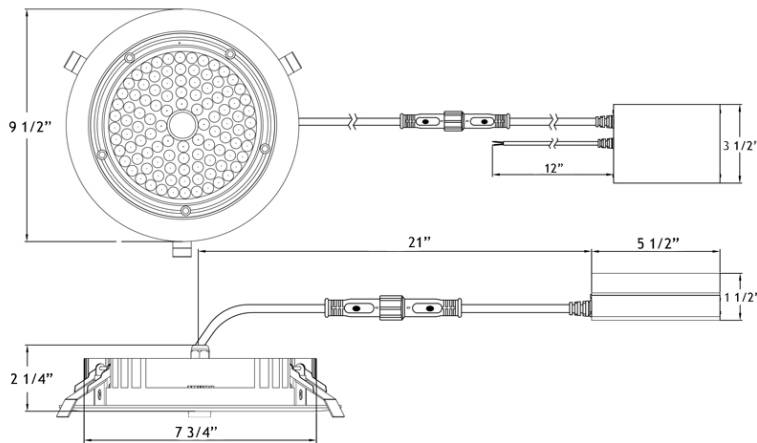

Project: _____

Location: _____

Trim Finish: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling Mount
Energy Used	40 W
Colour Temperature	4000 K
Light Output	4700 lm
Equivalent	75 W MH HPS
Beam Angle	45°
CRI	80 +
Input Voltage	120-277 V AC or 347 V AC
Power Factor	0.96
Dimming	0-10 V
Approved Location	Insulated Ceilings, Wet Locations
IP Rating	IP 65
Air Tight	Yes
Ambient Temperature	-40° F (-40° C) to +104° F (+40° C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star
Warranty	5 Year

Driver Included

Cable Rating FT4 / CM



Available Trims

White

Black



COMPLIANCE



Warehouses

Vancouver Toronto Las Vegas Naples Philadelphia Dallas Seattle Chicago Denver

tel: 1-844-24-LOTUS (56887)

fax: 1-877-561-6306




www.lotusLEDlights.com

CHARACTERISTICS

Body: Durable, Die Cast Aluminum Alloy for Optimal Heat Dissipation.
Paint: Oil Based Spray Painted - Scratch Resistant And Smooth Finish.
LEDs: 104 Pieces Of Custom Packaged LM80 Epistar 2835 with CRI80.
 Guaranteed 98% Lumen Maintenance After 6,000 Hours.
 Strict Binning To Ensure Consistent Light Colour.
Driver: In House Designed & Produced. Dimmable 0-10V. Input 120-277V V, or 347V
Connection Box: Patented Invention By Lotus LED Lights.
 Saves Contractors Labour On Installation.
Testing: Every Single Driver Is Powered For Minimum 24 Hours
 Together With The Fixture That It Is Shipped With. No Random Tests.

PHOTOMETRIC DATA

MODEL:	LL8R-40K	LAMP FLUX:	4704 LM
VOLTAGE:	120 V	LUMENS / POWER:	118 LM/W
POWER:	39.89 W	CENTRAL INTENSITY:	7129 CD
PF:	0.96	BEAM ANGLE:	47 DEGREES

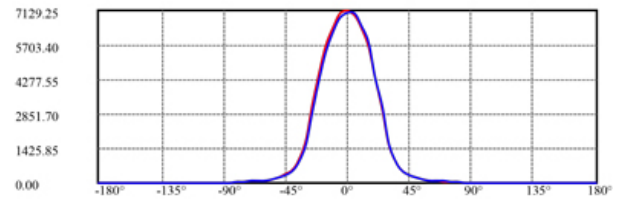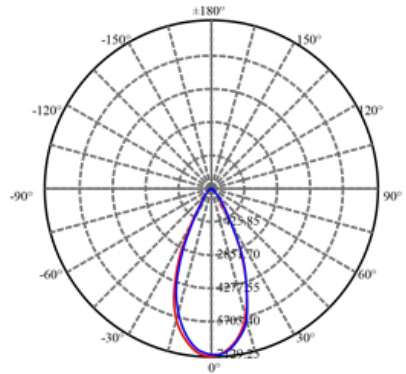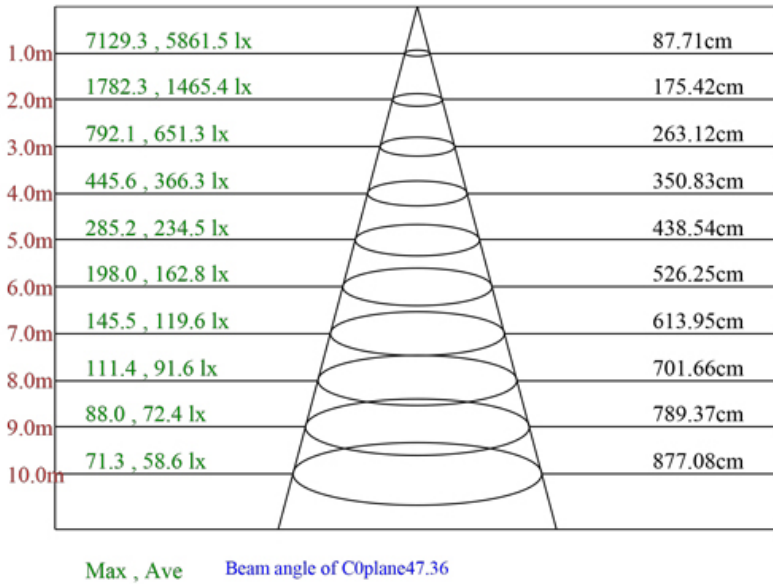

ORDERING GUIDE

Example: LL8R - 40K - WH

LL8R - 40K - Trim Finish

WH : White
 BK : Black

ACCESSORIES



347V Driver cat # LLL-LD40WH
 Dimmable 0-10V

Goof Plates for covering 12" and 14" square holes available as custom order



Warehouses

Vancouver	Toronto	Las Vegas	Naples	Philadelphia	Dallas	Seattle	Chicago	Denver
-----------	---------	-----------	--------	--------------	--------	---------	---------	--------

tel: 1-844-24-LOTUS (56887)

fax: 1-877-561-6306

www.lotusLEDlights.com