



Project: _____

Location: _____

Qty: _____

Notes: _____


DESCRIPTION

120-347V Input Driver 0-10V Dimmable for Lotus LED Lights 3" gimbal models 7.5W
Output 30-40 V DC, Constant Current 140 mA, PF > 0.95
Connection box wire capacity: Maximum of 5 No 12 AWG or 8 No 14 AWG

DIMENSIONS: 3 1/2" x 2 3/4" round

COMPATIBLE FIXTURES

LL3G
LRG3
LSG3
LRG3-4RSL

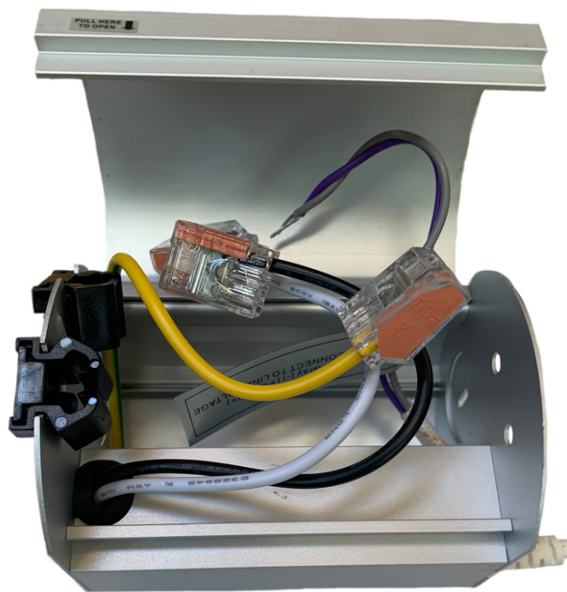

CABLE CONNECTORS

2 knock-outs 7/8"
2 Romex quick connectors

MOUNTING

directly on joist

ORDERING GUIDE

cat # **LLL-LD0716T**

Input: White (Neutral) & Black (Hot) wires with quick connectors. Connect to 120V - 347V AC according to the Dimmer Manufacturer's Instructions.

Output: Plastic FT4 / CMR rated cable with screw-in connector. Connect to compatible Lotus LED fixture from the list above

0-10V control wires: Grey (-) and Purple (+). Connect to dimming or control system 0-10V only. **DO NOT CONNECT TO LINE VOLTAGE.**

If you short the Grey and Purple wires the fixture would be dimmed to zero.

Warning: This driver is UL / cUL certified to be used only with Lotus LED Lights fixtures.

Connecting it to any other manufacturer's fixtures will void certification and warranty and may cause overheating and fire.