



Lotus
LED
Lights



Type IC, Wet & Air-Tight

DESCRIPTION

4" Round Regressed Gimbal LED With
Integral Driver In Connection Box
Unique & Patented Design:
Gimbal Yet Air-Tight Without Housing Needed
Regular 11.4W & High Output 15W Options


FEATURES & BENEFITS

3" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Fast & Easy To Install - Save On Labor
Directional Beam - Great for Sloped Ceilings and Artwork
CRI 90+ for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With
Attached Spring Clips. Ceiling Clearance Required: 3"

DIMENSIONS: ID 4 3/4" OD 5 3/4" Cut Out 4 3/4" to 5"

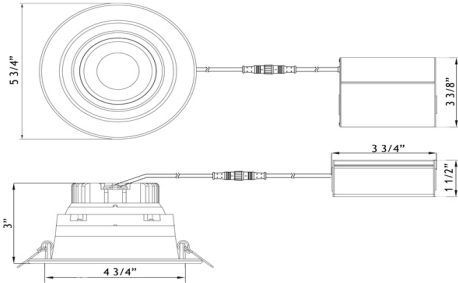

AVAILABLE TRIMS



White

Black

ORDERING GUIDE

Example 11.4W: **LRG4-30K-WH**

Example 15W: **LRG4-30K-HO-WH**

	CCT	15W only	Trim Finish	
LRG4	- xxK	- HO	- xx	
2700K	- 27K		- WH	White
3000K	- 30K		- BK	Black
3500K	- 35K			
4000K	- 40K			
5000K	- 50K			
DTW 3K-2K	- 32K			Dim to Warm 3000K to 2000K

LRG4

4" Round Regressed Gimbal LED 11.4 W / 15W

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Sloped Ceilings, Highlighting Artwork
Energy Used	11.4 W / 15W
Color Temperature (K)	2700 3000 3500 4000 5000 DTW 32
Light Output 11.4W (lm)	960 1000 1020 1050 1100 800
Light Output 15W (lm)	1100 1200 1250 1300 1400 900
Beam Angle	38° wide beam with 20° tilt and 360° rotation
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year Residential / 5 Year Commercial

120V TRIAC Dimmable Driver Included



Optional 120V - 347V Driver
0-10V Dimmable



11.4W: Cat # **LLL-LD1025T**
15W: Cat # **LLL-LD1535T**

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plate - cat # **RIP5**



Flanged Plate with Hanger Bars - cat # **FRP5**

COMPLIANCE



**Type IC
Air-Tight**

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

www.LotusLEDLights.com

Lotus LED Lights CANADA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090
Delta BC & Mississauga ON