



LLL-TMP-6-18W

Temporary Light for Lotus LED Lights Recessed models with external driver from 6W to 18W

Project: _____

Location: _____

Qty: _____

Notes: _____


SPECIFICATION	
Applications	Temporary Light
Power	6W to 18W
Colour Temperature	3000
Light Output W - lm	6 - 500 7.5 - 650 10.5 - 980 15 - 1300 18 - 1550
Beam Angle	150°
Dimmable	Yes - depending on the driver
CRI	80
Approved Location	Indoor
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Warranty	3 Year

DESCRIPTION

Temporary Work Light for recessed models with external driver from 6W to 18W
4 connectors that fit all original Lotus LED Lights models

FEATURES & BENEFITS

Test drivers and use them as temporary lighting before installing the actual recessed fixtures

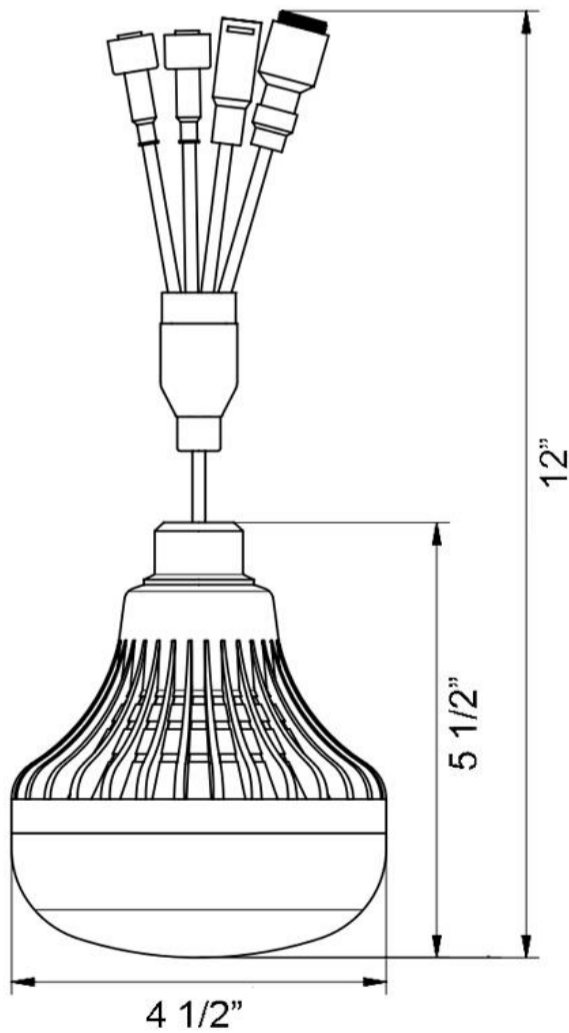

COMPATIBLE MODELS DRIVERS & LIGHT FIXTURES

Both Triac dimmable and 0-10V dimmable drivers are compatible

LLL-LL0612D/S/L LLL-LD0612T	LL2G-HO LRG2-HO LSG2-HO
LLL-LL0716D/S/L LLL-LD0716T	LL3G LRG3 LSG3
LLL-LD1025D3/S3/L3 LLL-LD1025T3	LL3R LL3G-HO LRG3-HO LSG3-HO LL4G LRG4
LLL-LD1535D/S/L/B/E LLL-LD1535T/TR/TB	LD3R LD3S LL4G-HO LRG4-HO LD4R LD4S LL4RR LL4SR LB4R LE4R-5CCT LL4R LL4S LRG6 LB6R LE6R-5CCT LE6S
LLL-LD2050D/S/L LLL-LD2050T/TR	LD4R-HO LD4S-HO LRG6-HO LD6R LL6RR LL6SR LL6R LD8R LB8R LE8R-5CCT

ORDERING GUIDE **LLL-TMP-6-18W**

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON