

LED-6-S12W-5CCTWH-R-BF

6" Round Regressed Baffle Budget LED 12W 5CCT

Project: _____

Location: _____

Qty: _____

Notes: _____


DESCRIPTION

6" Round Regressed Baffle Budget LED With Integral Driver In Connection Box

FEATURES & BENEFITS

- 1/2" Deep** - Fits directly under joist
- 1/4" Regressed** with Baffle Reflector for Reduced Glare
- Type IC Rated** - No Housing Required
- Driver Inside Connection Box** - No Junction Box Needed
- 5 CCT** user selectable 2700K to 5000K
- 120V Triac** Dimmable or **120-347V 0-10V** Dimmable Drivers

DIMENSIONS ID 6" OD 7" Depth: 1/2" Cut Out 6 1/8" to 6 1/4"

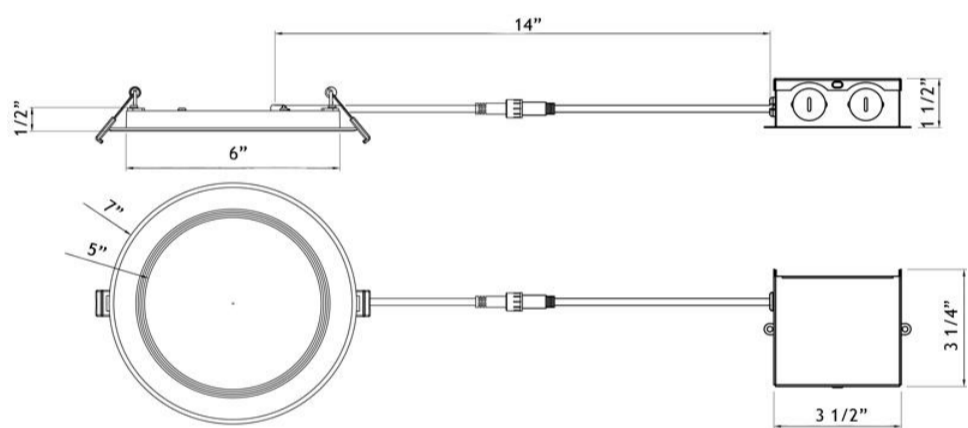

SPECIFICATION	
Applications	Renovations & New Construction
Energy Used	12 W
Color Temperature (K)	5 CCT: 2700 3000 3500 4000 5000
Light Output (lm)	940 990 1050 1070 1040
Halogen Equivalent	100 W
Beam Angle	110°
CRI	80
Default Driver Input & Dimming	120V AC 50/60 Hz - Triac Dimmable
Optional Driver Input & Dimming	120V-347V AC 50/60 Hz - 0-10V Dimmable
Junction Box Volume	9.69 cubic inches / Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

ACCESSORIES Sold Separately



[13" Mounting Plate Flat model # MP6-2](#)



[26" Flat Rough-In Plates model # RIP6](#)



[Flanged Plate with Hanger Bars - model # FRP6](#)



[0-10V Driver 120-347V model HBL012-AW-10-01A-5CS](#)



[Jumper Cable 10 ft model # JC-5CCT-10](#)



[Goof Ring White OD 7 5/8" model # GR6](#)

ORDERING GUIDE

LED-6-S12W-5CCTWH-R-BF

Stock trim - White
Other Trim Colors Available By Custom Order

COMPLIANCE



Type IC
Air-Tight

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC, Mississauga ON