



LED-6-S15W-xx-FG

6" Round Floating Gimbal Recessed LED 15W



DESCRIPTION

6" LED Floating Gimbal

Adjustable in any direction and easy to use

Perfect for accent lighting

FEATURES & BENEFITS

5 CCT Switchable - from 2700K to 5000K, or single 3000K

1 1/2" Deep - Fits in 1" ceiling space

Type IC Rated - No Housing Required



Driver Inside Connection Box - No Junction Box Needed

White and Black trims in stock

Damp Location & Airtight

Ideal for slopped ceilings, wall washing, highlighting artwork, task or general lighting

DIMENSIONS ID 5 1/4" OD 6 7/8" Depth 1 1/2" Cut Out 5 1/2" to 6"

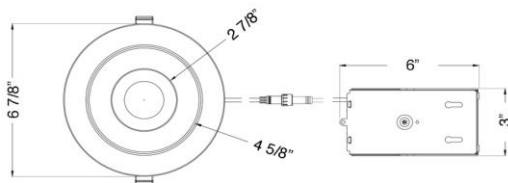

ORDERING GUIDE

LED-6-S15W-3K-FG-WH

[3000K White Trim](#)

LED-6-S15W-5CCT-FG-WH

[5CCT White Trim](#)

LED-6-S15W-5CCT-FG-BK

[5CCT Black Trim](#)




Project: _____

Location: _____

Model: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Slopped ceilings, Wall washing, General lighting
Energy Used	15 W
Color Temperature (K)	3000K or 5CCT: 2700 - 3000 - 3500 - 4000 - 5000
Light Output (lm)	3K: 1520 5CCT : 1180 - 1220 - 1270 - 1270 - 1180
Halogen Equivalent	120 W
Beam Angle	38°
CRI	90+
Default Driver	120V AC Triac Dimmable - for all CCTs
Optional Driver	120-277V AC 0-10V Dimmable - 3000K only
Junction Box Volume	9.69 cu in / max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year



ACCESSORIES

Sold Separately



[13" Mounting Plate Flat model # MP6-2](#)



[26" Flat Rough-In Plates model # RIP6](#)



[Flanged Plate with Hanger Bars - model # FRP6](#)



[Jumper Cable 10 ft for 5CCT model # JC-5CCT-10](#)

[Jumper Cable 10 ft for 3000K model # JC-10](#)



[Goof Ring White OD 7 5/8"](#)

White - model # GR6

Black - model # GR6-BK



0-10V Dimmable driver 120-277V for 3000K only

[HBL015-AW-10-01L](#)



0-10V Dimmable driver 120-347V for 5 CCT

[model HBL015-AW-10-01A-5CS](#)



Emergency Driver 8W 120-347V input

[model # BLD-HM08D-YY](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON