

HBL012-AW-10-01A-5CS

0-10V Driver 120-347V for 12W LBL 3 prong 5CCT fixtures



Project: _____

Location: _____

Qty: _____

Notes: _____

DESCRIPTION


120-347V Input Driver in Connection Box 0-10V Dimmable for Light By Lotus
 11W & 12W 5CCT Models 3 prong.
 Connection box wire capacity: Maximum of 4 No 12 AWG or 5 No 14 AWG
 c ETL us certified as recognized component.

COMPATIBLE FIXTURES

- [LED-2-S11W-5CCT-EY-T](#)
- [LED-2-S11W-5CCT-EY-T-SQ](#)
- [DS-LED-4-S12W](#)
- [DS-LED-4-S12W-SQ](#)
- [LED-6-S12W-5CCT](#)
- [LED-6-S12W-5CCTWH-R-BF](#)
- [LED-6-S12W-5CCTWH-SQ](#)
- [LED-6-S12W-5CCT-SQ-BF](#)
- [FR-LED-4-S12W-5CCT-PL](#)

ORDERING GUIDE

model # **HBL012-AW-10-01A-5CS**

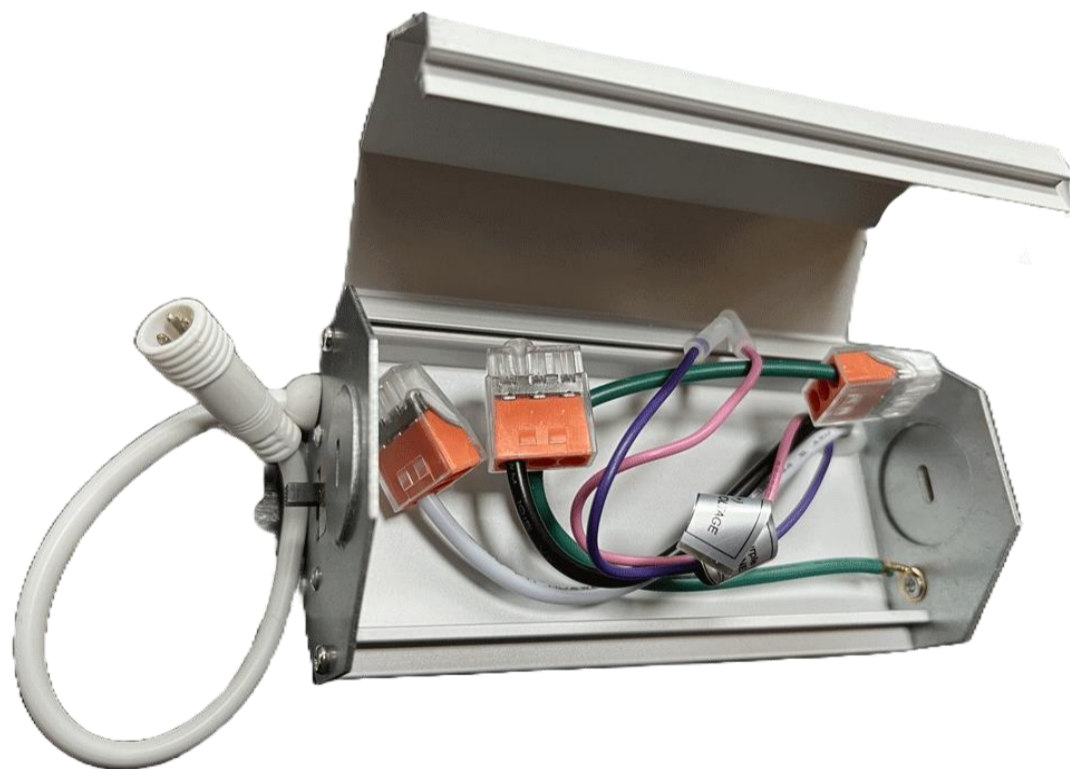

Input: White (Neutral) & Black (Hot) wires with quick connectors. Connect to 120V - 347V AC according to the Dimmer Manufacturer's Instructions.

Output: White cable with 3 prong screw-in connector. Connect to compatible Light By Lotus fixtures from the list above

0-10V contol wires: Grey (-) and Purple (+). Connect to dimming or control system 0-10V only. DO NOT CONNECT TO LINE VOLTAGE.

If you short the Grey and Purple wires the fixture would be turned off.

| | | |
|--|--|--|
| <p>Lotus LED Lights USA 250 H Street # 301, Blaine WA 98230 tel 360-200-5500 Hainesport NJ, Naples FL, Vancouver WA</p> | <p>www.LotusLEDLights.com mailing addresses warehouses</p> | <p>Lotus LED Lights CANADA 1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090 Delta BC & Mississauga ON</p> |
|--|--|--|