



# LED-4-S9W-xx-FG

## 4" Round Floating Gimbal Recessed LED 9W



### DESCRIPTION

4" LED Floating Gimbal

Adjustable in any direction and easy to use

Perfect for accent lighting

### FEATURES & BENEFITS

Ideal for slopped ceilings, wall washing, highlighting artwork, task or general lighting.

**1 3/8" Deep** - Fits in 1" ceiling space

**Type IC Rated** - No Housing Required

**Driver Inside Connection Box** - No Junction Box Needed

**3000K, 5 CCT** user selectable, or **Dim to Warm** 3000K to 1800K

Beam options: **38°** (standard), **24°** & **60°** available as adder

**White and Black** trims in stock

**Damp Location & Airtight**

**6 pack** available for additional savings



### ORDERING GUIDE

		Beam Angle
3000K White Trim	<b>LED-4-S9W-3K-FG-WH</b>	blank for 38°
5CCT White Trim	<b>LED-4-S9W-5CCT-FG-WH</b>	<b>-24D</b> for 24°
5CCT Black Trim	<b>LED-4-S9W-5CCT-FG-BK</b>	<b>-60D</b> for 60°
Dim to Warm White Trim	<b>LED-4-S9W-DTW-FG-WH</b>	
Dim to Warm Black Trim	<b>LED-4-S9W-DTW-FG-BK</b>	
6 pack 5CCT White Trim	<b>LED-4-S9W-5CCT-EFG-WH-6P</b>	



Project: \_\_\_\_\_


Location: \_\_\_\_\_

Model: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Slopped ceilings, Wall washing, General lighting
Energy Used	9 W
Color Temperature (K)	3000K   5 CCT 2700 - 3000 - 3500 - 4000 - 5000   DTW
Light Output (lm)	790   740 - 770 - 820 - 850 - 855   650
Halogen Equivalent	75 W
Beam Angle	38° (standard), 24° & 60° available as adder
CRI	90+
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Junction Box Volume	9.69 cu in / max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

**DIMENSIONS** ID 4" OD 4 7/8" Depth 1 3/8"  
 Cut Out 4 1/8" to 4 1/4" 120V Triac Dimmable Driver Included

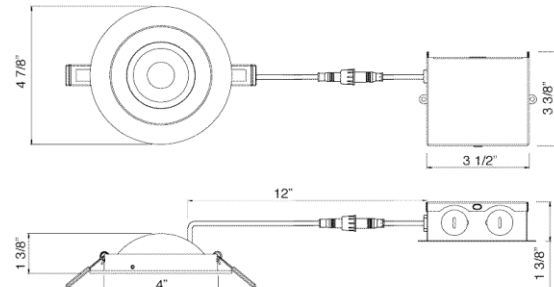

### ACCESSORIES

Sold Separately

- [13" Mounting Plate Flat model # MP4-2](#)
- [13" Mounting Plate Flanged model # MP4](#)
- [26" Flat Rough-In Plates model # RIP4](#)
- [Flanged Plate with Hanger Bars model # FRP4](#)
- [Jumper Cable 10 ft. Single CCT Model # JC-10](#)
- [Jumper Cable 10 ft. 5 CCT Model # JC-5CCT-10](#)
- [Goof Ring OD 5 3/4" model # GR4](#)
- Adder for 24° or 60° Light Beam