



LED-4-S9W-xx-FG

4" Round Floating Gimbal Recessed LED 9W

Type IC & Air-Tight



DESCRIPTION

4" LED Floating Gimbal

Adjustable in any direction and easy to use

Perfect for accent lighting

Selectable color changing switch for the 5CCT option

FEATURES & BENEFITS

Ideal for slopped ceilings, wall washing, highlighting artwork, task or general lighting.

1 3/8" Deep - Fits in 1" ceiling space

Type IC Rated - No Housing Required

Driver Inside Connection Box - No Junction Box Needed

3000K, 5 CCT user selectable, or Dim to Warm 3000K to 1800K

White and Black trims in stock

Damp Location & Airtight



5 Light Colors
User Selectable
2700K | 3000K | 3500K
4000K | 5000K

ORDERING GUIDE

3000K White Trim	LED-4-S9W-3K-FG-WH
5CCT White Trim	LED-4-S9W-5CCT-FG-WH
5CCT Black Trim	LED-4-S9W-5CCT-FG-BK
Dim to Warm White Trim	LED-4-S9W-DTW-FG-WH
Dim to Warm Black Trim	LED-4-S9W-DTW-FG-BK

Project: _____

Location: _____

Model: _____

Qty: _____

Notes: _____


SPECIFICATION	
Applications	Slopped ceilings, Wall washing, General lighting
Energy Used	9 W
Color Temperature (K)	3000K 5 CCT 2700 - 3000 - 3500 - 4000 - 5000 DTW
Light Output (lm)	790 740 - 770 - 820 - 850 - 855 650
Halogen Equivalent	75 W
Beam Angle	38°
CRI	90+
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Junction Box Volume	9.69 cu in / max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4° F (-20° C) to +104° F (+40° C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

DIMENSIONS

ID 4" OD 4 7/8" Depth 1 3/8"


Cut Out 4 1/8" to 4 1/4"

120V Triac Dimmable Driver Included

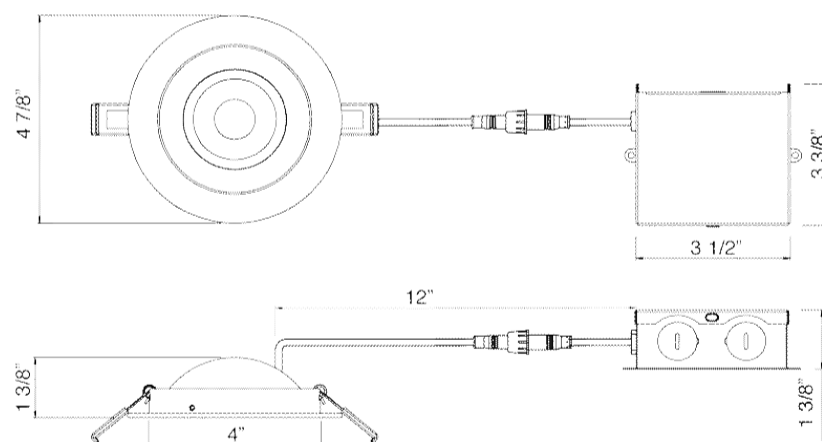

ACCESSORIES

Sold Separately

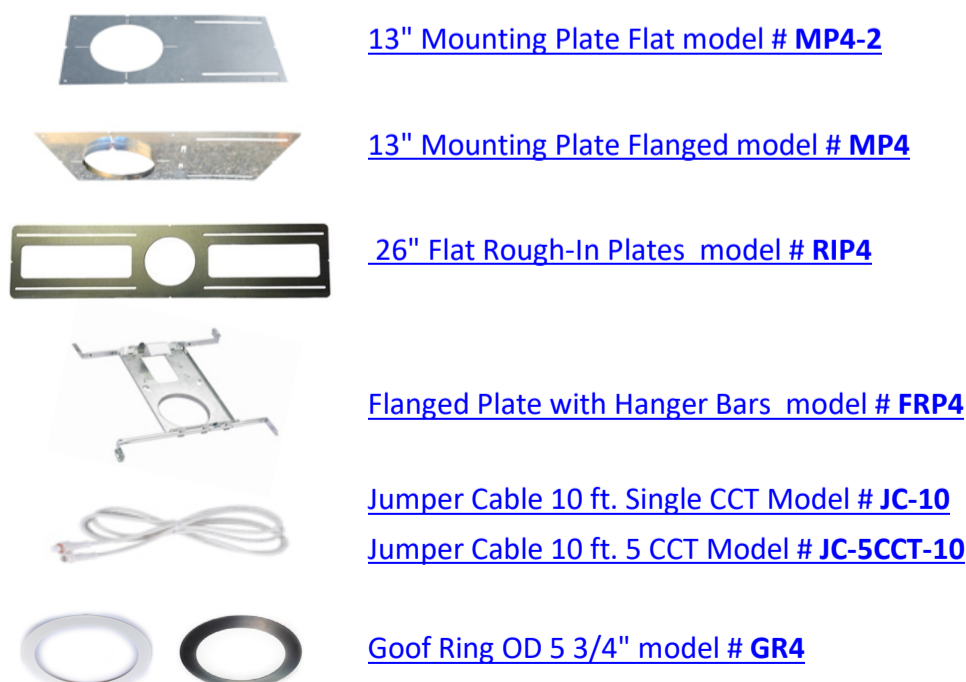

[13" Mounting Plate Flat model # MP4-2](#)

[13" Mounting Plate Flanged model # MP4](#)

[26" Flat Rough-In Plates model # RIP4](#)

[Flanged Plate with Hanger Bars model # FRP4](#)

[Jumper Cable 10 ft. Single CCT Model # JC-10](#)

[Jumper Cable 10 ft. 5 CCT Model # JC-5CCT-10](#)

[Goof Ring OD 5 3/4" model # GR4](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090
Delta BC & Mississauga ON