

### Type IC, Air-Tight, Wet & Plenum



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Trim Finish: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

#### DESCRIPTION

Recessed 4" Round LED With Integral Driver In Connection Box.  
Commercial Grade Quality With Architectural Design.



#### FEATURES & BENEFITS

- 2" Thin - Fits In Tight Ceiling Spaces
- Type IC Rated - No Housing Required
- Fast & Easy To Install - Save On Labour
- Open Plenum Rated - Suitable For Commercial Installations
- Driver Inside Connection Box - No Junction Box Needed
- CRI 90+ for True Colour Rendering
- Wet Location Approved

#### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips.  
2" Above Ceiling Clearance Required. Quick connectors Included.

**DIMENSIONS** ID 4" OD 5" Cut Out 4" to 4 1/4"

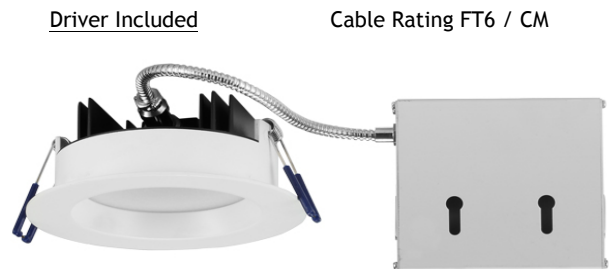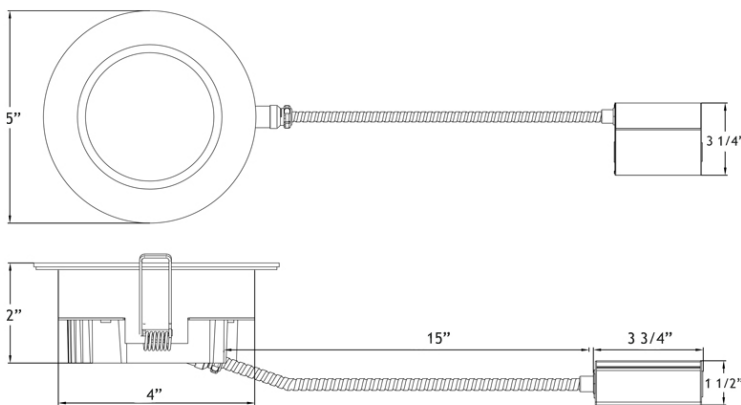

#### Available Trims



#### COMPLIANCE



#### Warehouses

Vancouver Toronto Las Vegas Naples Philadelphia Dallas Seattle Chicago Denver

tel: 1-844-24-LOTUS (56887)

fax: 1-877-561-6306

www.lotusLEDlights.com

**CHARACTERISTICS**

**Body:** Durable, Die Cast Aluminum Alloy for Optimal Heat Dissipation.

**Paint:** Oil Based Spray Painted - Scratch Resistant And Smooth Finish.

**LEDs:** 48 Pieces Of Custom Packaged LM80 Epistar 2835. CRI > 90.

Guaranteed 98% Lumen Maintenance After 6,000 Hours.

Strict Binning To Ensure Consistent Light Colour.

**Driver:** 4th Generation Lotus Designed. Field Proven Since 2011.

**Connection Box:** Patented Invention By Lotus LED Lights.



Saves Contractors Labour On Installation.

**Testing:** Every Single Driver Is Powered For Minimum 24 Hours

Together With The Fixture That It Is Shipped With. No Random Tests.

**PHOTOMETRIC DATA**

MODEL:	LL4RR-27K	LAMP FLUX:	951 LM
VOLTAGE:	120 V	LUMENS / POWER:	66 LM/W
POWER:	14.4 W	CENTRAL INTENSITY:	396 CD
PF:	0.99	BEAM ANGLE:	103 DEGREES

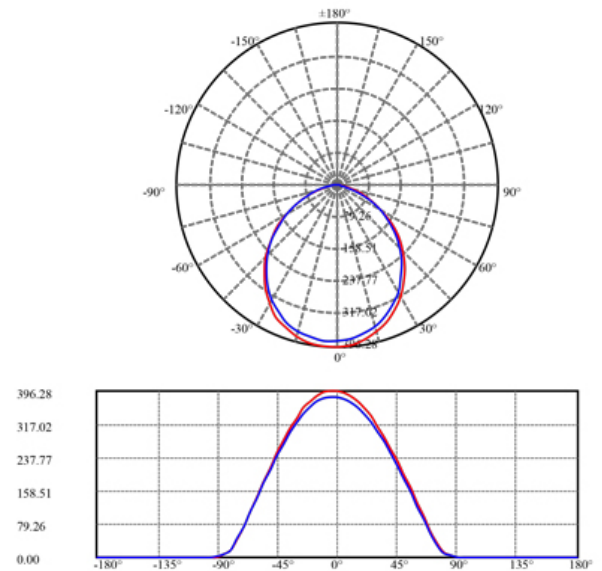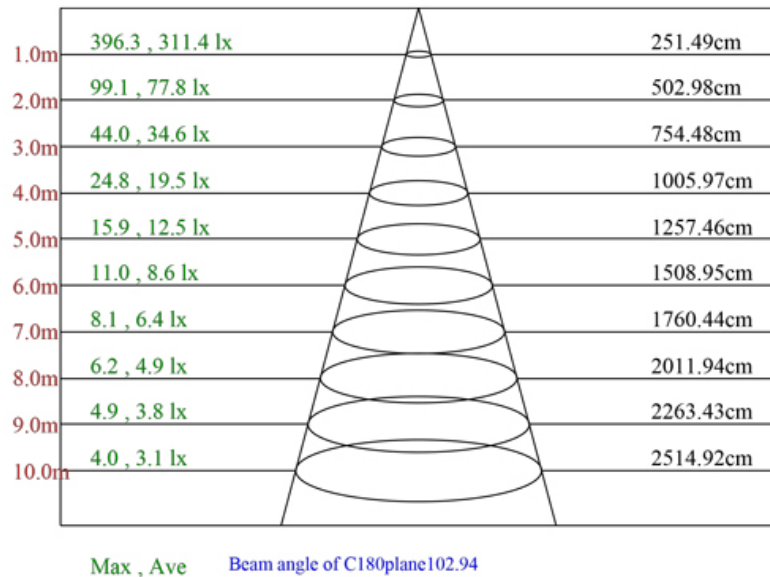

**ORDERING GUIDE**

Example: LL4RR - 27K - WH

LL4RR - 27K -  Trim Finish  
 WH : White  
 BK : Black

Order 277V - 347V Optional Driver Separately As cat # LLL-LD1535HR



**ACCESSORIES**



Flat Rough-In Plates - cat # RIP4



Flanged Rough-In Plates - cat # LRP4



Goof Ring OD 5 3/4" White cat # GR4; Black cat # GR4-BK



**Warehouses**

Vancouver Toronto Las Vegas Naples Philadelphia Dallas Seattle Chicago Denver

tel: 1-844-24-LOTUS (56887)

fax: 1-877-561-6306

www.lotusLEDlights.com