

**Type IC, Air-Tight, Wet & Plenum**


Project: \_\_\_\_\_

Location: \_\_\_\_\_

Trim Finish: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

**DESCRIPTION**


 Recessed 4" Round LED With Integral Driver In Connection Box.  
 Commercial Grade Quality With Architectural Design.

**FEATURES & BENEFITS**

- 2" Thin - Fits In Tight Ceiling Spaces
- Type IC Rated - No Housing Required
- Fast & Easy To Install - Save On Labour
- Open Plenum Rated - Suitable For Commercial Installations
- Driver Inside Connection Box - No Junction Box Needed
- CRI 90+ for True Colour Rendering
- Wet Location Approved

**MOUNTING**

 Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips.  
 2" Above Ceiling Clearance Required. Quick connectors Included.

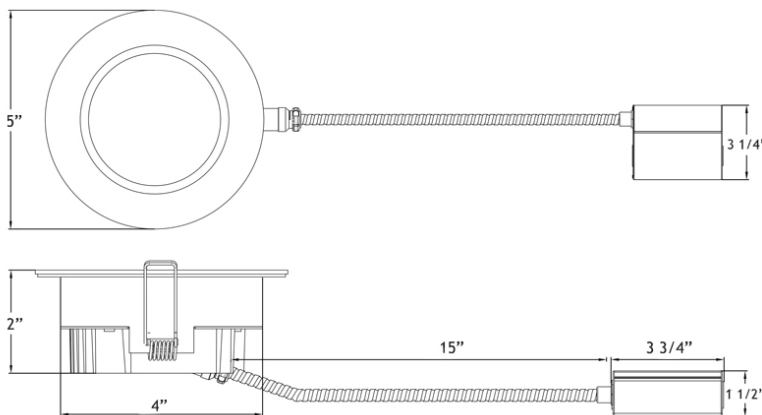**DIMENSIONS** ID 4" OD 5" Cut Out 4" to 4 1/4"

**Driver Included**

Cable Rating FT6 / CM


**Available Trims**

White

Black


**COMPLIANCE**


**CHARACTERISTICS**

**Body:** Durable, Die Cast Aluminum Alloy for Optimal Heat Dissipation.

**Paint:** Oil Based Spray Painted - Scratch Resistant And Smooth Finish.

**LEDs:** 48 Pieces Of Custom Packaged LM80 Epistar 2835. CRI > 90.

Guaranteed 98% Lumen Maintenance After 6,000 Hours.

Strict Binning To Ensure Consistent Light Colour.

**Driver:** 4th Generation Lotus Designed. Field Proven Since 2011.

**Connection Box:** Patented Invention By Lotus LED Lights.


Saves Contractors Labour On Installation.

**Testing:** Every Single Driver Is Powered For Minimum 24 Hours



Together With The Fixture That It Is Shipped With. No Random Tests.

**PHOTOMETRIC DATA**

MODEL:	LL4RR-40K	LAMP FLUX:	1020 LM
VOLTAGE:	120 V	LUMENS / POWER:	71 LM/W
POWER:	14.4 W	CENTRAL INTENSITY:	425 CD
PF:	0.99	BEAM ANGLE:	103 DEGREES

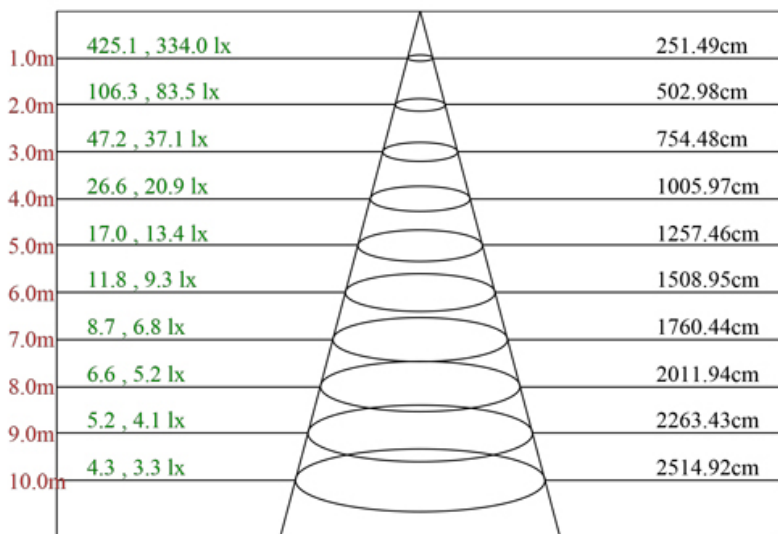

Max , Ave Beam angle of C180plane102.94

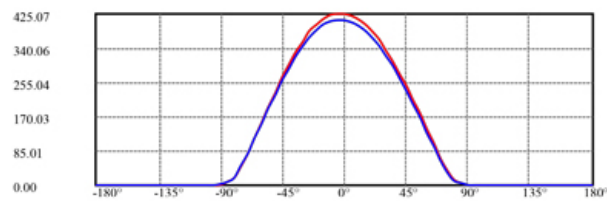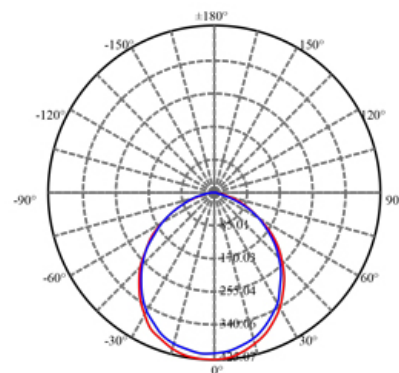

**ORDERING GUIDE**

Example: LL4RR - 40K - WH

LL4RR - 40K -  Trim Finish  
 WH : White  
 BK : Black

Order 277V - 347V Optional Driver Separately As cat # LLL-LD1535HR



**ACCESSORIES**



Flat Rough-In Plates - cat # RIP4



Flanged Rough-In Plates - cat # LRP4



Goof Ring OD 5 3/4"  
 White cat # GR4; Black cat # GR4-BK



**Warehouses**

Vancouver Toronto Las Vegas Naples Philadelphia Dallas Seattle Chicago Denver

tel: 1-844-24-LOTUS (56887)

fax: 1-877-561-6306

www.lotusLEDlights.com